

PNEUMATIC FASTENING TOOLS

Distributor:

NAILFAST
units 4-5 Nobel Court
Nobel Road
Wester Gourdie Industrial Estate
Dundee, UK
DD2 4UH

t: 01382 622 993
f: 01382 612 993
e: sales@nailfast.co.uk



ISO-9001

iPanrex®

PNEUMATIC FASTENING TOOLS



iPanrex®

PANREX INDUSTRIAL CO., LTD.

No. 67, Industrial 20th Road, Tai-Ping City,

(Ta-Li Industrial Park), Taichung, Taiwan

TEL: 886-4-2271-4832 FAX: 886-4-2271-4833

E-mail: panrex@ms66.hinet.net

<http://www.panrex.com.tw>



www.panrex.com.tw

ENTER AS CUSTOMER LEAVE AS FRIEND

Panrex is dedicated to advanced technology through extensive research development

Establishing complete fastening system to mark our tools safe, convenient and easy-to-operate is also our target.

Through international certificate, panrex has also developed our special Techniques such as the following:



1 NAIL-DRIVING WITH SAFETY DEVICE:
Slim nose easy to aim
(U.S.PATENT 6450387)



2 POWERFUL & EASY CAP RELEASE:
(U.S.PATENT 6651863)



3 ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment by wheel. (U.S.PATENT 6866177)



4 ONE STEP JAM CLEARANCE:
(PATENT pending)



5 ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other.
(U.S. PATENT 6419140, 6357647)
(G.M.PATENT Nr20217706.B)

6 DRY-FIRE LOCK: (U.S. PATENT 7004368)

7 PATENTED DRIVER DESIGN FOR DURABLE USE

8 UNIQUE NAIL GUIDE LOCK AND EASY NAIL LENGTH ADJUSTMENT (PATENT 220112)

9 FAST-CYCLE RATE TO 15 NAILS/SECOND(110Psi)

ONE YEAR WARRANTY WILL APPLY TO PANREX' TOOL, EXCEPT NORMAL WEARING PARTS.



Index

- **P01-08**
INDUSTRIAL COIL NAILER
- **P09-10**
CONSTRUCTION COIL NAILER
- **P11-12**
INDUSTRIAL FLOORING
NAILER & STAPLER
- **P13-18**
CONSTRUCTION
FRAMING NAILER
- **P19-21**
CONSTRUCTION &
PACKING STAPLER
- **P22**
CONSTRUCTION &
HEAVY-DUTY STAPLER
- **P23-24**
NARROW CROWN STAPLER
- **P25-27**
CONCRETE / FINISH /
BRAD NAILER
- **P28**
MINI TIP / PIN NAILER
- **P29-30**
FINE WIRE STAPLER
- **P31-32**
C-RING AND
ACCESSORIES


INDUSTRIAL COIL NAILER

For Pallet




**PRO-COIL NAILER
PR-9130P**

- TYPE OF NAIL
Wire Welded Nails
- SHANK
.099"-.148" (2.5mm-3.8mm)
- HEAD DIA
.256"-.338" (6.5mm-8.6mm)
- COLLATION ANGLE
15° Wire Welded (Pitch:10.5mm)
- WEIGHT
12.7lbs (5.76kg)
- LOAD CAPACITY
120-300 Nails
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)



**PRO-COIL NAILER
PR-9100EP (EPAL)**

- TYPE OF NAIL
Wire Welded Nails
- SHANK
.148" (3.8mm)
- HEAD DIA
.338" (8.6mm)
- COLLATION ANGLE
15° Wire Welded(Pitch:10.5mm)
- WEIGHT
12.5lbs (5.65kg)
- LOAD CAPACITY
150-300 Nails
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)




INDUSTRIAL COIL NAILER

For Pallet




**PRO-COIL NAILER
PR-8100P**

- TYPE OF NAIL
Wire Welded Nails
- SHANK
.099"-.148" (2.5mm-3.8mm)
- HEAD DIA
.256"-.295" (6.5mm-7.5mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
11.9lbs (5.40kg)
- LOAD CAPACITY
150-300 Nails
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)



**PRO-COIL NAILER
PR-790P**

- SHANK
.099"-.148" (2.5-3.8mm)
- HEAD DIA.
.236"-.295" (6.0-7.5mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
7.6lbs (3.47kg)
- LOAD CAPACITY
150-300 Nails
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)




INDUSTRIAL COIL NAILER

For Pallet



PRO-COIL NAILER PCN-55

- SHANK
.083"-.099" (2.1-2.5mm)
- HEAD DIA.
.189"-.236" (4.8-6.0mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
5.5lbs (2.5kg)
- LOAD CAPACITY
300-350 Nails
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)



PRO-COIL NAILER PCN-55M.1

- SHANK
.083"-.099" (2.1-2.5mm)
- HEAD DIA.
.189"-.236" (4.8-6.0mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
5.3lbs (2.4kg)
- LOAD CAPACITY
300-350 Nails
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)


INDUSTRIAL COIL NAILER

For Pallet



PRO-COIL NAILER PCN-670SA.1

- SHANK
.092"-.131" (2.3-3.3)
- HEAD DIA.
.224"-.275" (5.6-7.0mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
6.78lbs (3.08kg)
- LOAD CAPACITY
225-300 Nails
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)




PRO-COIL NAILER PCN-70

- SHANK
.092"-.118" (2.3-3.0mm)
- HEAD DIA.
.224"-.275" (5.6-7.0mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
7.47lbs (3.39kg)
- LOAD CAPACITY
225-300 Nails
- OPERATING PRESSURE
70-120psi (4.9-7.8kg/cm²)

PRO-COIL NAILER PCN-70A2 FOR OPERATION

- 2 SET NOSE DESIGN WITH METAL INSERT FOR REPLACE AS THE HEAD OF NOSE WEARS
- SHANK
.092"-.118" (2.3-3.0mm)
- HEAD DIA.
.224"-.275" (5.6-7.0mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
7.47lbs (3.39kg)
- LOAD CAPACITY
225-300 Nails
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)



INDUSTRIAL COIL NAILER

APPLICATION

PALLETS / DECKING / EXTERIOR TRIM / SHEATHING
SUBFLOORS / ROOF DECKING / EXTERIOR DECK
FURRING / STRAPPING / PACKAGING



PCN-670S

- 1 BUILT-IN SOUND REDUCER**
Low noise and vibration
- 2 ADJUSTABLE AIR DEFLECTOR**
- 3 POWERFUL**
Driving power: 780 inch-lbs
- 4 FAST-CYCLE RATE TO 15 NAILS/SECOND (110psi)**
- 5 ERGONOMIC DESIGN**
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size.
- 6 ADJUSTABLE WORK CONTACTING ELEMENT**
Depth of drive adjustment by wheel.




8 SAFTY TRIGGER LOCK LEVEL



9 EASY DIAL NAIL SIZE ADJUSTMENT (R.O.C. PATENT 220112)

- 7 DURABLE AND RELIABLE:**
Rugged design will stand up to the demands of the job in any kind of weather.

INDUSTRIAL COIL NAILER

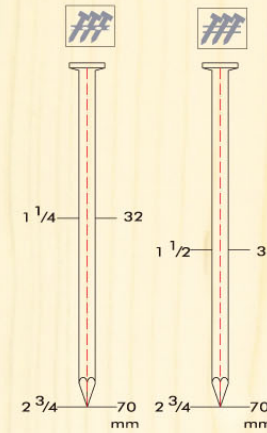


PRO-COIL NAILER PCN-670S

- SHANK
.099"~.131" (2.5~3.3)
- HEAD DIA.
.224"~.275" (5.6~7.0mm)
- COLLATION ANGLE
15° Wire Welded and sheet collated
- WEIGHT
6.5lbs (2.97kg)
- LOAD CAPACITY
150~300 Nails
- OPERATING PRESSURE
70~120psi (4.9-8.3kg/cm²)



PRO-COIL NAILER PCN-790S

- SHANK
.099"~.148" (2.5-3.8mm)
- HEAD DIA.
.236"~.295" (6.0-7.5mm)
- COLLATION ANGLE
15° Wire Welded and sheet collated
- WEIGHT
7.6lbs (3.48kg)
- LOAD CAPACITY
150~300 Nails
- OPERATING PRESSURE
70~120psi (4.9-8.3kg/cm²)

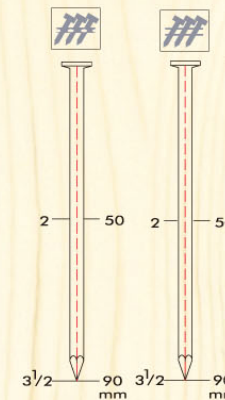


INDUSTRIAL COIL NAILER

INDUSTRIAL COIL NAILER




PCN-5655

- SHANK
.092"~.113" (2.3~2.87mm)
- HEAD DIA.
.197"~.236" (5.0~6.0mm)
- COLLATION ANGLE
15° wire welded and sheet collated
- WEIGHT
5.5lbs (2.5kg)
- LOAD CAPACITY
250~400 Nails
- OPERATING PRESSURE
70~120psi (4.9-8.3kg/cm²)

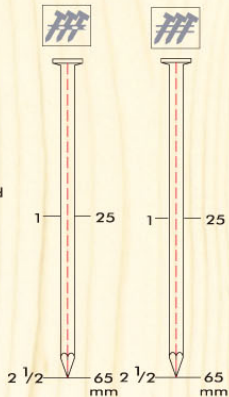


PRO-COIL NAILER PCN-5575

- SHANK
.083"~.092" (2.1~2.3mm)
- HEAD DIA.
.189"~.224" (4.8~5.6mm)
- COLLATION ANGLE
15° Wire Welded and sheet collated
- WEIGHT
5.3lbs (2.4kg)
- LOAD CAPACITY
250~400Nails
- OPERATING PRESSURE
70~120psi (4.9-8.3kg/cm²)

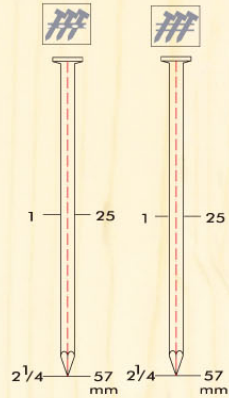


PRO-COIL NAILER PR-670C

- SHANK
.092"~.131" (2.3~3.3mm)
- HEAD DIA.
.224"~.275" (5.6~7.0mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
6.2lbs (2.8kg)
- LOAD CAPACITY
225~300 Nails
- OPERATING PRESSURE
70~120psi (4.9-8.3kg/cm²)




PRO-COIL NAILER PR-565C

- SHANK
.092"~.113" (2.3~2.87mm)
- HEAD DIA.
.197"~.236" (5~6mm)
- COLLATION ANGLE
15° Wire Welded and Sheet Collated
- WEIGHT
5.5lbs (2.5kg)
- LOAD CAPACITY
250~400 Nails
- OPERATING PRESSURE
70~120psi (4.9-8.3kg/cm²)

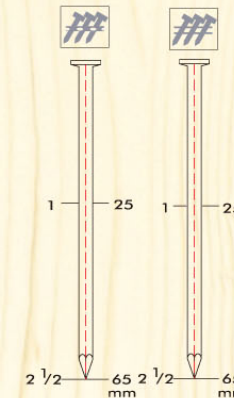

PRO-COIL NAILER PR-557C

- SHANK
.083"~.092" (2.1~2.3mm)
- HEAD DIA.
.189"~.236" (4.8~6mm)
- COLLATION ANGLE
15° Wire Welded
- WEIGHT
5.3lbs (2.4kg)
- LOAD CAPACITY
250~400 Nails
- OPERATING PRESSURE
70~120psi (4.9-8.3kg/cm²)



NEW CONSTRUCTION COIL NAILER

APPLICATION

SIDING / FENCING / EXTERIOR TRIM / SHEATHING
SUBFLOORS / ROOF DECKING / EXTERIOR DECK
FURRING / STRAPPING



PCN-5655.1

- 1 BUILT-IN SOUND REDUCER**
Low noise and vibration
- 2 ADJUSTABLE AIR DEFLECTOR**
- 3 ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:**
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)
- 4 POWERFUL**
Driving power: 600 inch-lbs
- 5 FAST-CYCLE RATE TO 15 NAILS/SECOND (110Psi)**
- 6 ERGONOMIC DESIGN**
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size.

10 EXCLUSIVE NOZZLE TIP TO FIT SIDING DECKING OPERATION



- 7 ADJUSTABLE WORK CONTACTING ELEMENT**
Depth of drive adjustment by wheel. (U.S. PATENT 6866177)
- 8 DURABLE AND RELIABLE:**
Rugged design will stand up to the demands of the job in any kind of weather.



9 EASY DIAL NAIL SIZE ADJUSTMENT
(R.O.C. PATENT 220112)

CONSTRUCTION COIL NAILER



**PRO-COIL NAILER
PCN-5655.1**

- SHANK
.092"-.113" (2.3-2.87mm)
- HEAD DIA.
.197"-.236" (5.0-6.0mm)
- COLLATION ANGLE
15° wire welded and sheet collated
- WEIGHT
5.5lbs (2.5kg)
- LOAD CAPACITY
250-400 Nails
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)





**PRO-ROOFING COIL
NAILER
PR-945P**

- SHANK
.120" (3.05mm)
- HEAD DIA.
.413" (10.5mm)
- COLLATION ANGLE
15°
- WEIGHT
5.55lbs (2.52kg)
- LOAD CAPACITY
120 Nails
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)



**PRO-COIL NAILER
PCN-32**

- SHANK
.079"-.086" (2.0-2.2mm)
- HEAD DIA.
.169"-.189" (4.3-4.8mm)
- COLLATION ANGLE
0° Wire Welded
- WEIGHT
2.78lbs (1.26kg)
- LOAD CAPACITY
150-300 Nails
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)



INDUSTRIAL FLOORING NAILER & STAPLER

APPLICATION

HARDWOOD FLOORING



FS-50

- 1 HIGH-SPEED, MALLET-ACTUATED PNEUMATIC OPERATION INCREASES
- 2 STRONG, LIGHT WEIGHT, ONLY 8.8-9lbs
- 3 AVAILABLE WITH LONG OR SHORT HANDLE
- 4 COMFORTABLE GRIP DESIGN
- 5 PRODUCTIVITY OVER MANUALLY-OPERATED TOOLS
- 6 ANGLED FITTING PREVENT HOSE FROM INTERFERING MAGAZINE OR OPERATOR.
- 7 PRECISELY DRIVES STAPLES OR FLOORING CLEATS AT PROPER ANGLE AND DEPTH
- 8 SPECIAL MAGAZINE DESIGN. FOR EASY LOADING AND OPERATION



12 ACCESSORY



11 MALLET AND SERVICE PARTS BAG INCLUDED

- 9 EXTRA-WIDE COMPOSITE BASE PLATE FOR ADDED STABILITY.


- 10 PATENTED INSIDE PARTS DESIGN FOR DURABLE AND SAFE OPERATION
(U.S. PATENT: 7213735)
(AU. 2007214318)

INDUSTRIAL FLOORING NAILER & STAPLER

PRO-FLOORING STAPLER

FS-50


- TYPE OF FASTENER
CROWN: 1/2" (13mm)
GA.: 15-15 1/2 GA.
LENGTH: 1 1/4"-2" (32-50mm)
- WEIGHT
9lbs (4.1 kg)
- TOOL HEIGHT
18.8" (478mm)
- OPERATING PRESSURE
70-90psi (4.9-6.3kg/cm²)
- CAPACITY
90 Staples



PRO-FLOORING NAILER


LFN-50

- TYPE OF FASTENER
CROWN / GA.: L' Shape Cleat Nails
LENGTH: 1 1/4"-2" (32-50mm)
- WEIGHT
8.8lbs (4.0kg)
- TOOL HEIGHT
18.8" (478mm)
- OPERATING PRESSURE
70-90psi (4.9-6.3kg/cm²)
- CAPACITY
110 Nails



PRO-FLOORING NAILER FOR L CLEAT & T NAIL 2 IN 1

LFN-50B

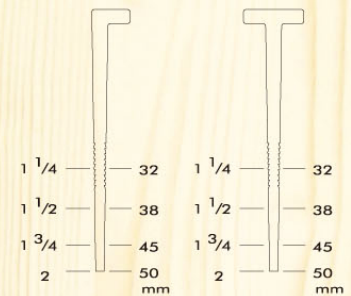

CONSTRUCTION FRAMING NAILER

APPLICATION

FRAMING / WALL SHEATHING
ROOF SHEATHING / FLOOR DECKING
/ BLOCKING SUBASSEMBLIES



PR-0034P

- 1 POWERFUL AND EASY CAP RELEASE**
(U.S.PATENT 6651863)
- 2 LIGHTEST**
- 3 DURABLE AND RELIABLE:**
Rugged design will stand up to the demands of the job in any kind of weather.
- 4 ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:**
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)
- 5 ERGONOMIC DESIGN**
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size
- 6 ADJUSTABLE WORK CONTACTING ELEMENT**
Depth of drive adjustment element on the tool.
- 7 FAST-CYCLE RATE TO 10 NAILS/SECOND (110Psi)**



9 PUSHER & FOLLOWER PROTECTOR DESIGN



- 8 SAFETY LOCK-OUT MECHANISM**
Tool will not fire unless more than three nails are in the magazine

CONSTRUCTION FRAMING NAILER




**PRO-FRAMING NAILER
(TOP Loading)
PR-0034P**

- TYPE OF NAIL
CLIPPED HEAD PAPER COLLATED
- MAGAZINE ANGLE
31°
- WEIGHT
7.74lbs (3.52kg)
- TOOL HEIGHT
14" (356mm)
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)
- SHANK DIA.
.113"~.148" (2.87~3.8mm)
- FASTENERS LENGTH
50-100mm (2"~4")
- CAPACITY
90 Nails



**PRO-FRAMING NAILER
(TOP Loading)
PR-9017P**

- TYPE OF NAIL
FULL ROUND HEAD PLASTIC COLLATED
- MAGAZINE ANGLE
17°
- WEIGHT
7.96bs (3.62kg)
- TOOL HEIGHT
14" (356mm)
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)
- SHANK DIA.
.113"~.133" (2.87~3.4mm)
- FASTENERS LENGTH
50-90mm (2 3/8"~3 1/2")
- CAPACITY
55 Nails




**CONSTRUCTION
FRAMING NAILER**



**PRO-FRAMING NAILER
(TOP Loading)
PR-0021P**

- **TYPE OF NAIL**
FULL ROUND HEAD PLASTIC COLLATED
- **MAGAZINE ANGLE**
20°
- **WEIGHT**
8lbs (3.65kg)
- **TOOL HEIGHT**
14.3" (363mm)
- **OPERATING PRESSURE**
80-120psi (5.5-8.3kg/cm²)
- **SHANK DIA.**
.113"~.161" (2.87~4.1mm)
- **FASTENERS LENGTH**
60-100mm (2 3/8"~4")
- **CAPACITY**
66 Nails



**PRO-FRAMING NAILER
(TOP Loading)
PR-9021P**

- **TYPE OF NAIL**
FULL ROUND HEAD PLASTIC COLLATED
- **MAGAZINE ANGLE**
20°
- **WEIGHT**
7.96lbs (3.62kg)
- **TOOL HEIGHT**
14" (356mm)
- **OPERATING PRESSURE**
80-120psi (5.5-8.3kg/cm²)
- **SHANK DIA.**
.113"~.161" (2.87~4.1mm)
- **FASTENERS LENGTH**
50-90mm (2"~3 1/2")
- **CAPACITY**
66 Nails



**CONSTRUCTION
FRAMING NAILER**




**PRO-FRAMING NAILER
(TOP Loading)
PR-16021**

- **TYPE OF NAIL**
FULL ROUND HEAD PLASTIC COLLATED
- **MAGAZINE ANGLE**
20°
- **WEIGHT**
14.99lbs (6.8kg)
- **OPERATING PRESSURE**
80-120psi (5.5-8.3kg/cm²)
- **SHANK DIA.**
.148"~.197" (3.8~5.0mm)
- **FASTENERS LENGTH**
100-160mm (4"~6 1/4")
- **CAPACITY**
55-60 Nails
- **MAGAZINE LOADING**
TOP



**PRO-FRAMING NAILER
(TOP Loading)
PR-13021**

- **TYPE OF NAIL**
FULL ROUND HEAD PLASTIC COLLATED
- **MAGAZINE ANGLE**
20°
- **WEIGHT**
13.42lbs (6.1kg)
- **OPERATING PRESSURE**
80-120psi (5.5-8.3kg/cm²)
- **SHANK DIA.**
.131"~.161" (2.87~4.1mm)
- **FASTENERS LENGTH**
90-130mm (3 1/4"~5 1/8")
- **CAPACITY**
55 Nails
- **MAGAZINE LOADING**
TOP

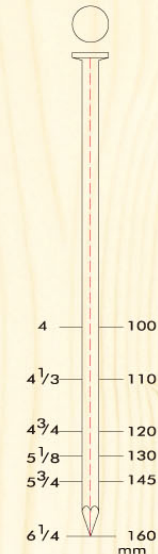

CONSTRUCTION FRAMING NAILER

APPLICATION

FRAMING / WALL SHEATHING
ROOF SHEATHING / FLOOR DECKING
/ BLOCKING SUBASSEMBLIES



PF-0021P

- 1 POWERFUL AND LIGHTEST**
Driving power : 1100 inch-lbs
- 2 DURABLE AND RELIABLE:**
Rugged design will stand up to the demands of the job in any kind of weather.
- 3 ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:**
No adjustment needed to switch from one to the other.(U.S. PATENT 6419140)
- 4 ERGONOMIC DESIGN**
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size
- 5 ADJUSTABLE WORK CONTACTING ELEMENT**
- 6 FAST & EASY LOADING**
By pass pusher for fast, easy one-step loading.
- 7 FAST-CYCLE RATE TO 10 NAILS / SECOND (110Psi)**

- 9 REAR LOADING AND PUSHER PROTECTOR DESIGN.**



- 8 SAFETY LOCK-OUT MECHANISM**
Tool will not fire unless more than three nails are in the magazine

CONSTRUCTION FRAMING NAILER



PRO-FRAMING NAILER
(Real Loading)

PF-0034


- TYPE OF NAIL
CLIPPED HEAD PAPER COLLATED
- MAGAZINE ANGLE
31°
- WEIGHT
7.6lbs (3.47kg)
- TOOL HEIGHT
14.3" (363mm)
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)
- SHANK DIA.
.113"-.148" (2.87~3.8mm)
- FASTENERS LENGTH
50-100mm (2"-4")
- CAPACITY
90 Nails



PRO-FRAMING NAILER
(Real Loading)


PF-0021

- TYPE OF NAIL
FULL ROUND HEAD PLASTIC COLLATED
- MAGAZINE ANGLE
20°
- WEIGHT
7.9lbs (3.59kg)
- TOOL HEIGHT
14.3" (363mm)
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)
- SHANK DIA.
.113"-.161" (2.87~4.1mm)
- FASTENERS LENGTH
50-100mm (2"-4")
- CAPACITY
66 Nails

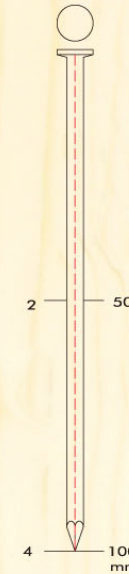

PF-9021

- TYPE OF NAIL
FULL ROUND HEAD PLASTIC COLLATED
- MAGAZINE ANGLE
20°
- WEIGHT
7.70lbs (3.50kg)
- TOOL HEIGHT
14" (356mm)
- OPERATING PRESSURE
80-120psi (5.5-8.3kg/cm²)
- SHANK DIA.
.113"-.131" (2.87~3.3mm)
- FASTENERS LENGTH
50-90mm (2"-3 1/2")
- CAPACITY
66 Nails



CONSTRUCTION & PACKING STAPLER

APPLICATION

SHEATHING / SUBFLOORING / ROOF DECKING
FURNITURE FRAMES / PALLETS / VINYL SIDING
CRATE AND BOX ASSEMBLY



PR-16951P

- 1 ADJUSTABLE AIR DEFLECTOR**
- 2 ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:**
No adjustment needed to switch from one to the other.
(U.S. PATENT 6419140)
- 3 LOW NOISE AND LOW VIBRATION**
- 4 POWERFUL AND PATENTED DRIVER DESIGN FOR DURABLE USE**
- 5 FAST-CYCLE RATE TO 15 NAILS/SECOND (110Psi)**
- 6 ERGONOMIC DESIGN**
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size
- 7 ADJUSTABLE WORK CONTACTING ELEMENT**
Depth of drive adjustment element on the tool.
- 8 ONE STEP JAM CLEARANCE (PATENT PENDING)**

11 EASY LOADING AND PUSHER PROTECTOR DESIGN (PATENT PENDING)



FOR FLOORING TIP



SLIM SAFETY LEVER FOR SELECT



- 9 DURABLE AND RELIABLE:**
Rugged design will stand up to the demands of the job in any kind of weather.
- 10 LIGHTEST**
ONLY 4.8lbs(2.18kg)

CONSTRUCTION & PACKING STAPLER



PRO-MEDIUM CROWN STAPLER PR-16851P

- GAUGE SIZE
16GA
- CROWN SIZE
7/16" (10.6~11.2mm)
- WIDTH X THICKNESS
.063"x.055" (1.6x1.4mm)
- WEIGHT
4.8lbs (2.18kg)
- LOAD CAPACITY
147 Staples
- OPERATING PRESSURE
80~120psi (5.5-8.3kg/cm²)



PRO-MEDIUM CROWN STAPLER PR-16951P

- GAUGE SIZE
16GA
- CROWN SIZE
1/2" (12.2~12.7mm)
- WIDTH X THICKNESS
.063"x.055" (1.6x1.4mm)
- WEIGHT
4.8lbs (2.18kg)
- LOAD CAPACITY
147 Staples
- OPERATING PRESSURE
80~120psi (5.5-8.3kg/cm²)



PR-16851K-1 SLIM SAFETY LEVER FOR SELECT



**CONSTRUCTION &
PACKING STAPLER**




PRO-MEDIUM CROWN STAPLER
PS-16951C

- GAUGE SIZE
16GA
- CROWN SIZE
1/2" (12.2~12.7mm)
- WIDTH X THICKNESS
.063"x.055" (1.6x1.4mm)
- WEIGHT
4.73lbs (2.15kg)
- LOAD CAPACITY
147 Staples
- OPERATING PRESSURE
80~120psi (5.5-8.3kg/cm²)



PRO-MEDIUM CROWN STAPLER
PS-16851C

- GAUGE SIZE
16GA
- CROWN SIZE
7/16" (10.6~11.2mm)
- WIDTH X THICKNESS
.063"x.055" (1.6x1.4mm)
- WEIGHT
4.73lbs (2.15kg)
- LOAD CAPACITY
147 Staples
- OPERATING PRESSURE
80~120psi (5.5-8.3kg/cm²)



**CONSTRUCTION &
HEAVY-DUTY STAPLER**



PRO-MEDIUM CROWN STAPLER
PR-15864Q
(TWO IN ONE)

- GAUGE SIZE
16GA,N
- CROWN SIZE
7/16" (10.6~11.2mm)
- WIDTH X THICKNESS
.063"x.055" (1.6x1.4mm)
- WEIGHT
6.2lbs (2.8kg)
- LOAD CAPACITY
147 Staples




- GAUGE SIZE
15GA-Q
- CROWN SIZE
7/16" (11.2mm)
- WIDTH X THICKNESS
.075"x.067" (1.9x1.7mm)
- LOAD CAPACITY
130 Staples
- OPERATING PRESSURE
80~120psi (5.5-8.3kg/cm²)



FOR FLOORING TIP

NARROW CROWN STAPLER



NARROW CROWN STAPLER
PR-9040P

- GAUGE SIZE
18GA

- CROWN SIZE
1/4" (5.8mm)

- WIDTH X THICKNESS
.050"x.039" (1.25x1.0mm)

- WEIGHT
2.9lbs (1.3kg)

- LOAD CAPACITY
100 Staples


- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)

NARROW CROWN STAPLER




M325 (18 GAUGE)

- NAIL LENGTH:** min 5/16" - 1-1/4" (8-32mm)
- CROWN SIZE:** 3/8" (10mm)
- WIDTH:** 1.26mm
- THICKNESS:** 1.04mm
- WEIGHT:** 1kg
- CAPACITY:** 100 STAPLES
- OPERATING PRESSURE:** 70-90 PSI



M405 (18 GAUGE)

- NAIL LENGTH:** min 5/8" - 1-5/8" (16-40mm)
- CROWN SIZE:** 3/8" (10mm)
- WIDTH:** 1.26mm
- THICKNESS:** 1.04mm
- WEIGHT:** 1.2kg
- CAPACITY:** 100 STAPLE
- OPERATING PRESSURE:** 70-90 PSI



CONCRETE/ FINISH/PIN NAILER

APPLICATION

DOOR AND WINDOW CASING
 PANEL ASSEMBLY
 FURNITURE FRAMES TRIM
 INTERIOR AND EXTERIOR TRIM
 BUTT JOINTS CABINETS



PR-1850F

- 1 BUILT-IN SOUND REDUCER**
Low noise and vibration
- 2 ADJUSTABLE AIR DEFLECTOR**
- 3 ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:**
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)
- 4 PATENTED DRIVER DESIGN FOR DURABLE USE**
- 5 QUICK AND EASY SIDE LOADING**
- 6 NO-MAR RUBBER TIP FOR PERFECT FINISH**
- 7 UNIQUE DRY-FIRE LOCK DESIGN**
(U.S. PATENT 7004368)



- 8 NAIL-DRIVING WITH SAFETY DEVICE:**
Slim nose easy aim (U.S. PATENT 6450387)



- 9 DUAL POSITION BELT HOOK**
(U.S. PATENT PENDING)

- 10 DEPTH-OF-DRIVE ADJUSTMENT**
(U.S. PATENT 6866177)




CONCRETE & FINISH NAILER




15GA. CONCRETE NAILER PR-1.8 50C (UP TO 50MM CONCRETE NAILER)

- FASTENER TYPE
15GA SMALL HEAD NAILS
- LENGTH
15-50mm (5/8"-2")
- SHANK DIA
1.8mm (.070")
- HEAD SIZE
3.0 x 1.8mm
- WEIGHT
3.1lbs (1.4kg)
- MAGAZINE CAPACITY
50
- MAGAZINE LOADING
Side
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)




16GA. FINISH NAILER PR-1650 (UP TO 50MM FINISH NAILER)

- FASTENER TYPE
16 GAUGE, FINISH NAILS
- LENGTH
15-50mm (5/8"-2")
- WIDTH x THICKNESS
1.6 x 1.4mm
- HEAD SIZE
3.0 x 1.6mm
- WEIGHT
3.1lbs (1.4kg)
- MAGAZINE CAPACITY
50
- MAGAZINE LOADING
Side
- OPERATING PRESSURE
70-120psi (4.9-8.3kg/cm²)



FINISH/BRAD NAILER




186A. FINISH NAILER
PR-1850F

- GAUGE SIZE:
18 GA.
- LENGTH:
5/8"–2" (15-50mm)
- WIDTH X THICKNESS:
.050"x.039" (1.25x1.0mm)
- WEIGHT
3.08lbs (1.4kg)
- LOAD CAPACITY
100 Nails
- OPERATING PRESSURE
70–120psi (4.9-8.3kg/cm²)




166A. FINISH NAILER
PR-1664T

- GAUGE SIZE:
16 GA.
- LENGTH:
3/4"–2 1/2" (20-65mm)
- WIDTH X THICKNESS:
.063"x.055" (1.6x1.4mm)
- WEIGHT
3.52lbs (1.6kg)
- LOAD CAPACITY
100 Nails
- OPERATING PRESSURE
70–120psi (4.9-8.3kg/cm²)

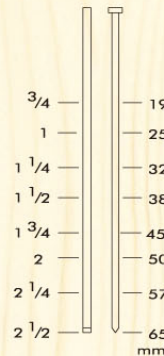

MINI TIP/PIN NAILER




21 GA. MINI TIP NAILER
PR-2145S

- GAUGE SIZE:
21 GA.
- LENGTH:
5/8"–1 3/4" (15-45mm)
- SHANK DIA
Ø 0.84mm (0.033")
- WEIGHT
2.53lbs (1.15kg)
- LOAD CAPACITY
100 Nails
- OPERATING PRESSURE
60–100psi (4.2-7.0kg/cm²)



23GA. PIN NAILER
PR-2345S

- GAUGE SIZE:
23 GA.
- LENGTH:
5/8"–1 3/4" (15-45mm)
- SHANK DIA
Ø 0.64mm (0.025")
- WEIGHT
2.53lbs (1.15kg)
- LOAD CAPACITY
200 Nails
- OPERATING PRESSURE
60–100psi (4.2-7.0kg/cm²)



FINE WIRE STAPLER



7116A (22 GAUGE)

- NAIL LENGTH:
1/4"~5/8"(6-16mm)

- CROWN SIZE:
9.1mm


- NAIL WIDTH:
0.75mm

- NAIL THICKNESS:
0.6mm

- TOOL WEIGHT:
2lbs (0.9kgs)

- CAPACITY
150 staples

- OPERATING PRESSURE
70~110psi (5-7bar)



7116ALM (22 GAUGE)

- NAIL LENGTH:
1/4"~5/8"(6-16mm)

- CROWN SIZE:
9.1mm


- NAIL WIDTH:
0.75mm

- NAIL THICKNESS:
0.6mm

- TOOL WEIGHT:
2lbs (0.9kgs)

- CAPACITY
400 staples

- OPERATING PRESSURE
70~110psi (5-7bar)



FINE WIRE STAPLER



8016A (21 GAUGE)

- NAIL LENGTH:
1/4"~5/8"(6-16mm)

- CROWN SIZE:
12.9mm


- NAIL WIDTH:
0.95mm

- NAIL THICKNESS:
0.65mm

- TOOL WEIGHT:
2lbs (0.9kgs)

- CAPACITY
100 staples

- OPERATING PRESSURE
70~110psi (5-7bar)



8016ALM (21 GAUGE)

- NAIL LENGTH:
1/4"~5/8"(6-16mm)

- CROWN SIZE:
12.9mm


- NAIL WIDTH:
0.95mm

- NAIL THICKNESS:
0.65mm

- TOOL WEIGHT:
2lbs (0.9kgs)

- CAPACITY
270 staples

- OPERATING PRESSURE
70~110psi (5-7bar)






C-RING

PCR-660

- GAUGE SIZE:
16 GA.
- CROWN:
16.8mmx9mm
- SHANK:
1.6mm
- CLOSURE SIZE
2.5–3.5mm
- WEIGHT
3.52lbs (1.7kg)
- LOAD CAPACITY
130 Nails
- OPERATING PRESSURE
70–120psi (4.9-8.3kg/cm²)



**▼ REMOTE FIRE VALVE
FOR COIL NAILER**



REMOTE FIRE VALVE



TWO SET NOSE FOR PALLET
COIL NAILER (PCN-70)



REMOTE FIRE VALVE SET

**▼ TOOL BAG
ENVIRONMENTAL AND CONVENIENCE
POLYESTER CARRYING TOOL BAG**



**IT IS USE FOR
COIL NAILER**

- PCN-565P
- PR-8100P
- PR-945P
- PCN-790S
- PR-557P
- PCN-670S
- PR-565P
- PCN-557S
- PR-670P
- PR-790P
- PR-15864Q



**FULL ROUND HEAD PLASTIC
COLLATED FRAMING NAILER
FOR LONG MAGAZINE (4 STRIPS)**

**Max / Hitachi / Bostitch Piston Driver
Assembly Parts For The Replacement**



BRAND NAME	MODEL	PARTS #	BRAND NAME	MODEL	PARTS #
MAX	CN55	MA31866	HITACHI	NV45AB2	HI-878156
MAX	CN70	MA31657	HITACHI	NR65AK	HI-883471
MAX	CN80	MA34445	HITACHI	NR83A2	HI-877323
PASLODE	F350S	PA501042	HITACHI	NR90AD	HI-884957
PASLODE	F250S-PP	PA501468	HITACHI	NR90AE	HI-885519
PASLODE	5250-PP	PA401933	HITACHI	NV75AG	HI-883980
PASLODE	3150W16	PA404345	HITACHI	NR83AA2	HI-883510
BOSTITCH	RN45B	BO101961	HITACHI	NR83A	HI-877323-R
BOSTITCH	RN46	BO149826	HITACHI	NV83A	HI-878428
BOSTITCH	N70	BO102630	HITACHI	N5008AC	HI-883716
BOSTITCH	N80	BO80157	HITACHI	NV65AH	HI-882684
BOSTITCH	N100	BO100157			
BOSTITCH	N400	BO11204-1030001			
BOSTITCH	64084	11204-0780009			
BOSTITCH	64099	11204-1010001			