



Cordless

MAX[®]

SuperFramer[®]

CE

GS690CH

Easy set-up

Requires no hoses, no compressors

34° Clipped-head nails

Uses standard 34-degree paper collated clipped-head stick nails

Lightweight and well-balanced

Weighs only 3.5kg with solid aluminum Magazine

Powerful motor

Drives up to 90mm x 3.3mm nails



**High-Powered
fuel cell**



Cordless SuperFramer[®] GS690CH



STANDARD EQUIPMENT

- Rechargeable battery
- AC battery charger
- Plastic carry case



OPTION


12V Car adapter cord



TOOL SPECIFICATIONS

Product name	GS690CH
Dimensions	391(H) × 110(W) × 340(L)mm (15-3/8" × 4-3/8" × 13-3/8")
Weight	3.5 kg (7.8 lbs)
Load Capacity	40 nails/1 strip
Firing mode	Sequential trip
Battery type	Ni-MH 6V DC 1.5Ah
Recharge time	150 minutes at maximum
Battery life/charge	Approx. 4,500 nails
Fuel cell life	Approx. 1,100 nails (26°C)
NOISE	A-weighted single-event sound power level LWA, 1s, d 105.4dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 98.8dB These values are determined and documented in accordance to EN12549:1999.
VIBRATION	Vibration characteristic value = 4.46m/s ² These values are determined and documented in accordance to ISO 8662-11

APPLICABLE FASTENERS

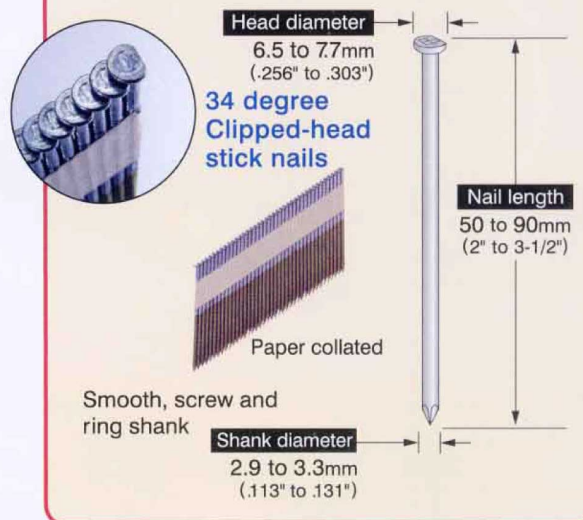

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.