


# EVERWIN

2023 CATALOG

TOUGHER

FASTER

SMARTER

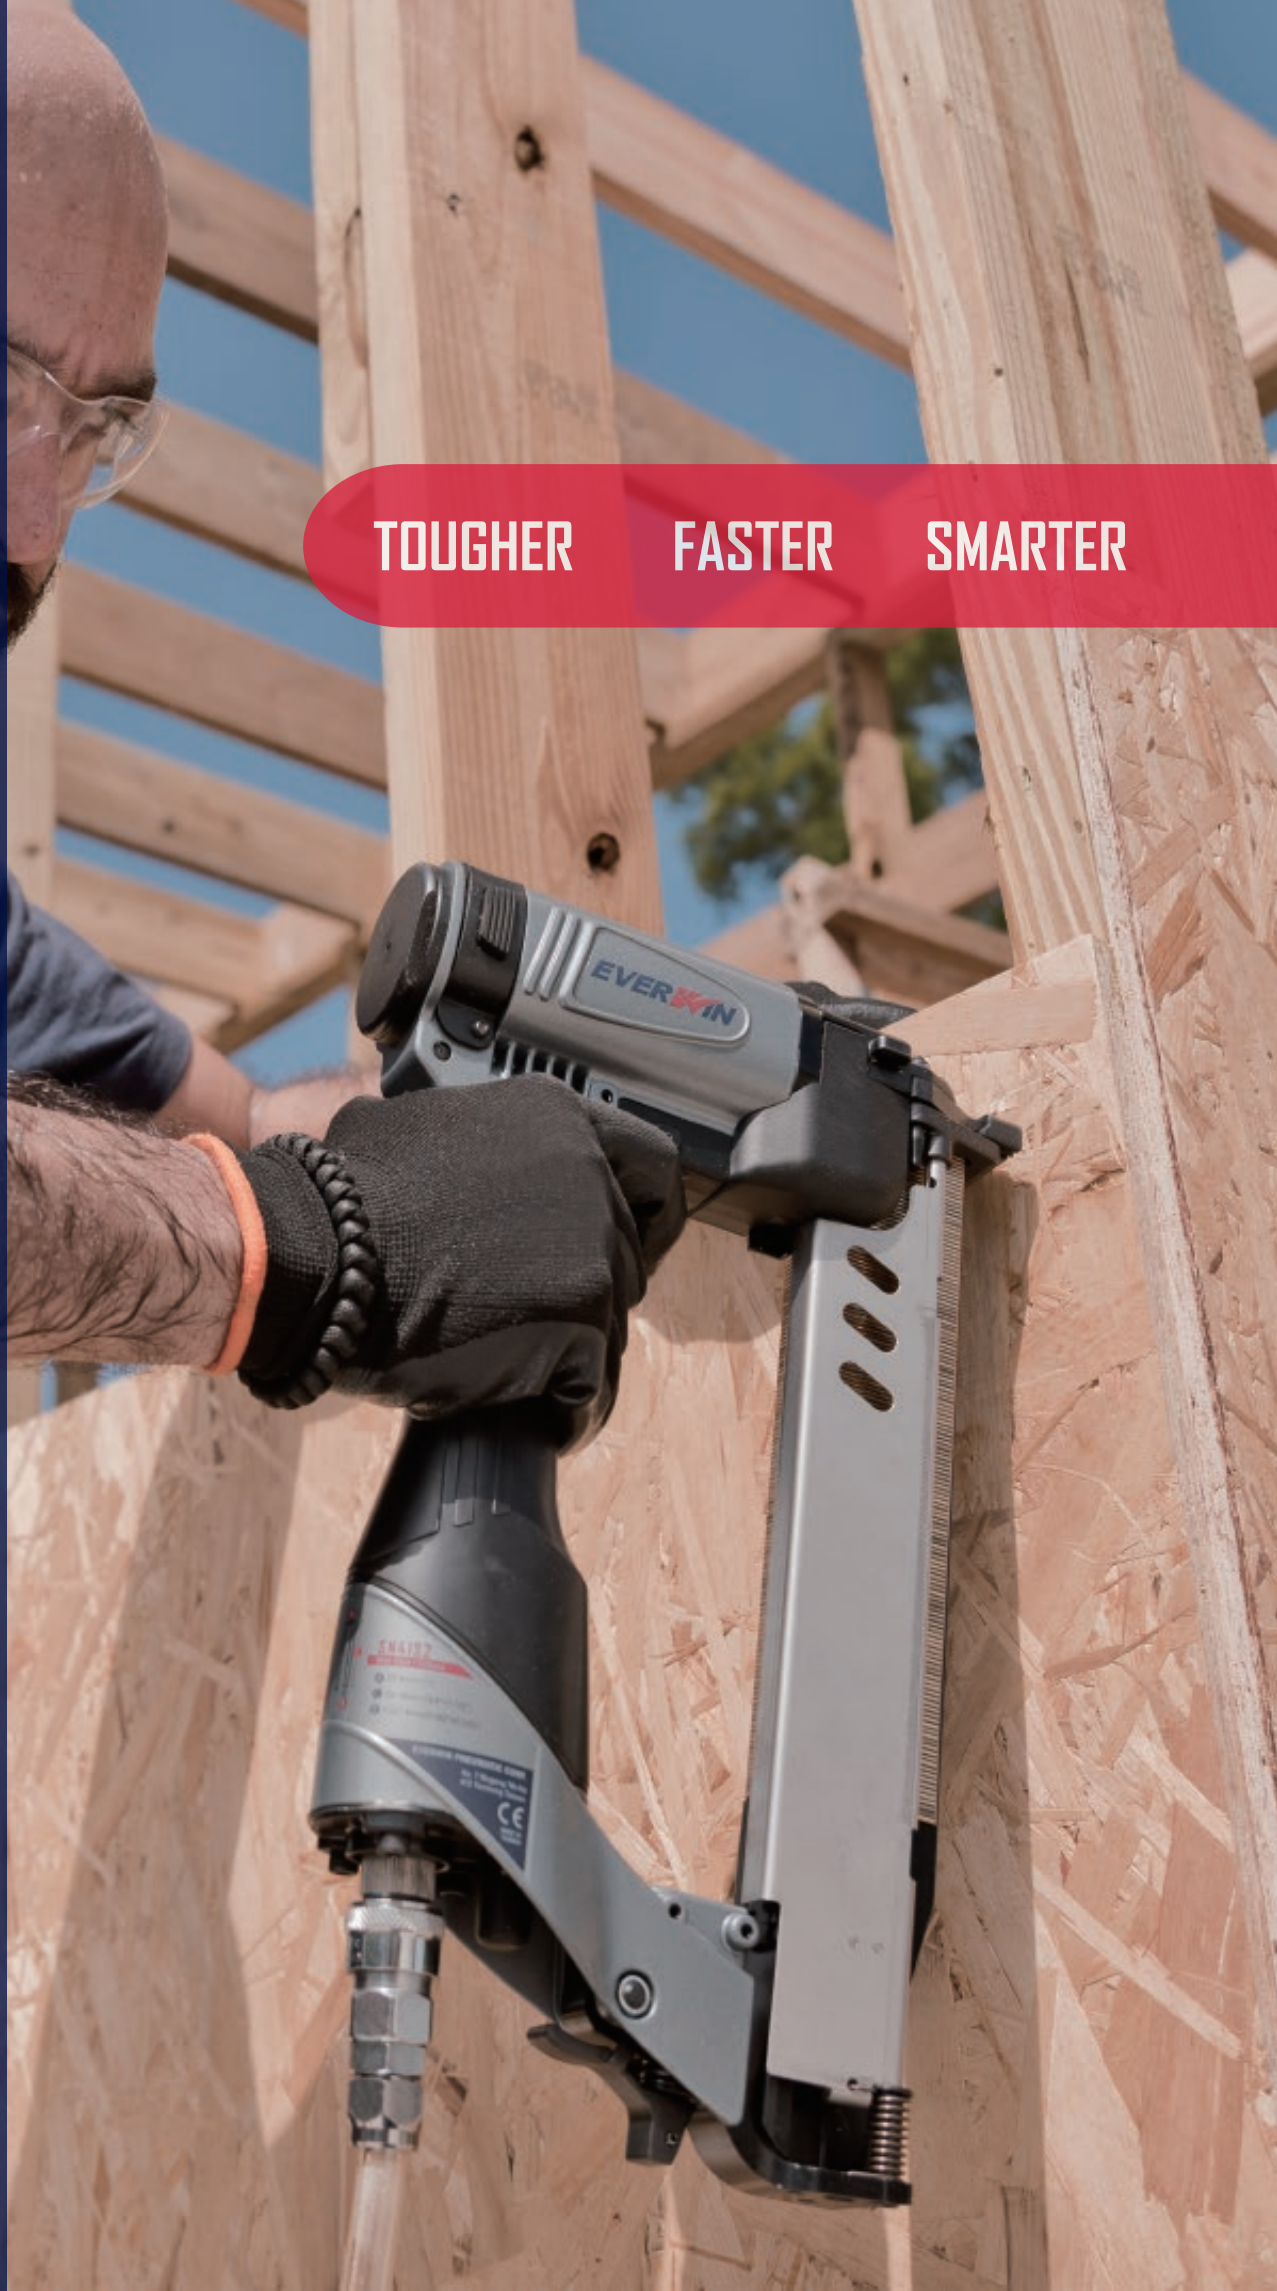





**TOUGHER. FASTER. SMARTER.**

Founded in 2012, EVERWIN® carries the knowledge, facilities and expertise to push the limits of the fastening industry. Innovative tool design and manufacturing precision drive EVERWIN® to be a leader in industrial fastening solutions.

EVERWIN® was founded by a group of American and Taiwanese pneumatic tool experts, each boasting around 40 years of experience and success in the world of pneumatic fastening. They founded the company with one shared goal in mind-to "build a brand the fastening industry can rely on for consistency and efficiency.






Within two years of being founded, EVERWIN® launched a series of industrial coil nailers that filled a longstanding need in the pallet-making industry for extremely durable nailers. This solidified its reputation as one of the toughest tool manufacturers in the business.

EVERWIN® continues to produce industrial nailers and staplers that exceed standards from a series of heavy wire staplers to plier staplers and jumbo strip nailers. Having built and refined its reputation in the industrial fastening sector, it entered the construction fastening sector and in 2016 introduced the SCN65 siding nailer, which revolutionized the construction industry with its PRECISION NAILING TECH and in 2017 introduced the FCN90L, the lightest and most versatile 90mm coil nailer ever produced.

Today EVERWIN® provides a comprehensive array of high-quality pneumatic tools to serve the Pallet and Crate, Furniture, Automotive, Construction and Packaging industries. In 2017, EVERWIN® moved into its new headquarters with upgraded, state-of-the-art manufacturing facilities. This, as well as its distribution and service sites across the globe, helps EVERWIN® provide customers with even better groundbreaking products and unparalleled services.

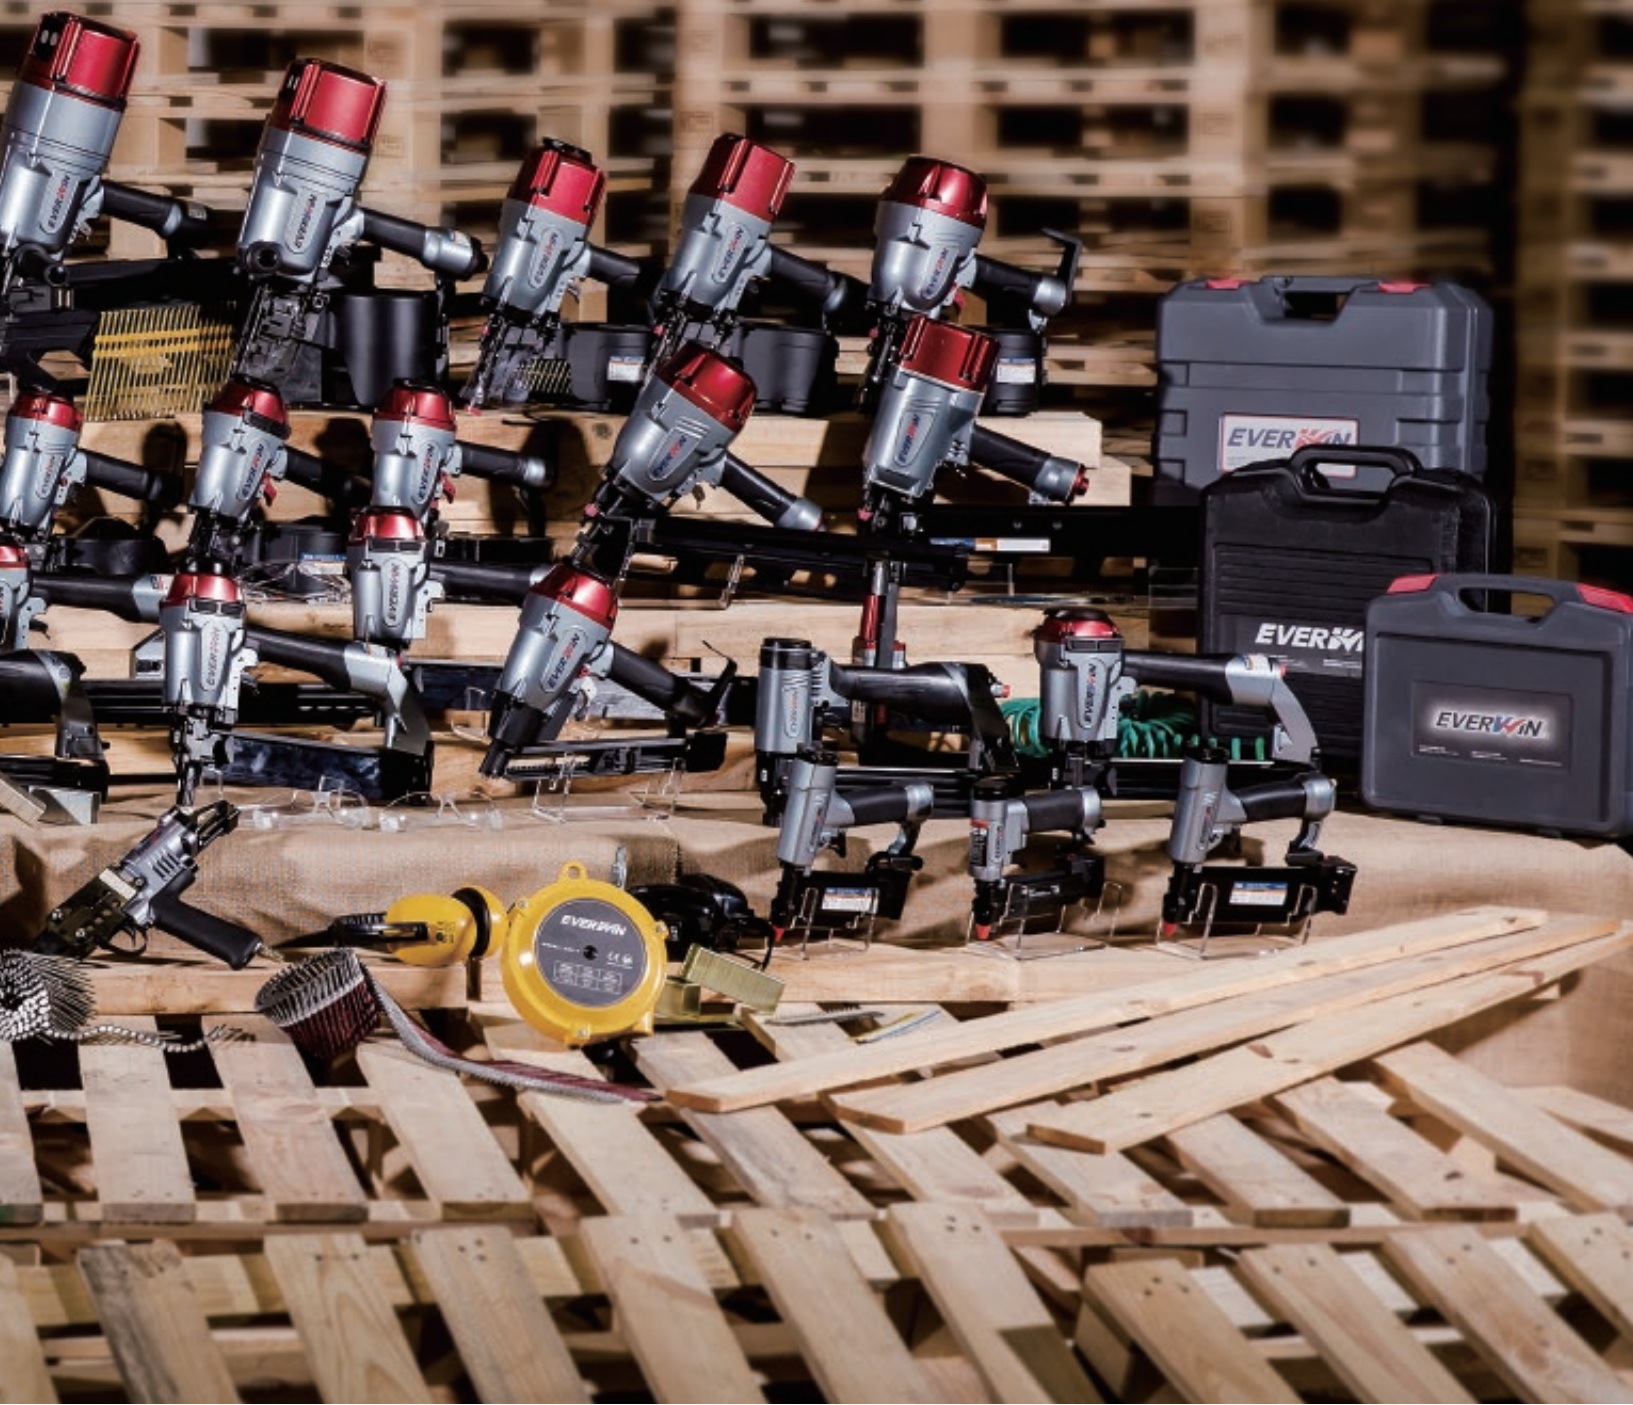



# Tool Recommendation by Flow of Construction

## 1 | Steel to Concrete



CP3040A

## 2 | Framing



FSN3490



FSN2283



FCN90B



FCN90LB



SCN90L

## 4 | Vapor Barrier



FS9240BC

## 5 | Roofing



SN40-R Series



SN41-R Series

## 6 | Lathing



SN412S2



SN402S2

## 7 | Decking



PN65M-D



FCN90B



FCN90LB



SCN90L



PN70-D



FSN2283AD

## 8 | Cabinets



FS9040



### 3 | Sheathing (Floor / Roof)



FSN3490



FSN2283



PN65M-D




SN41 Series



SN50 Series



SN65Q

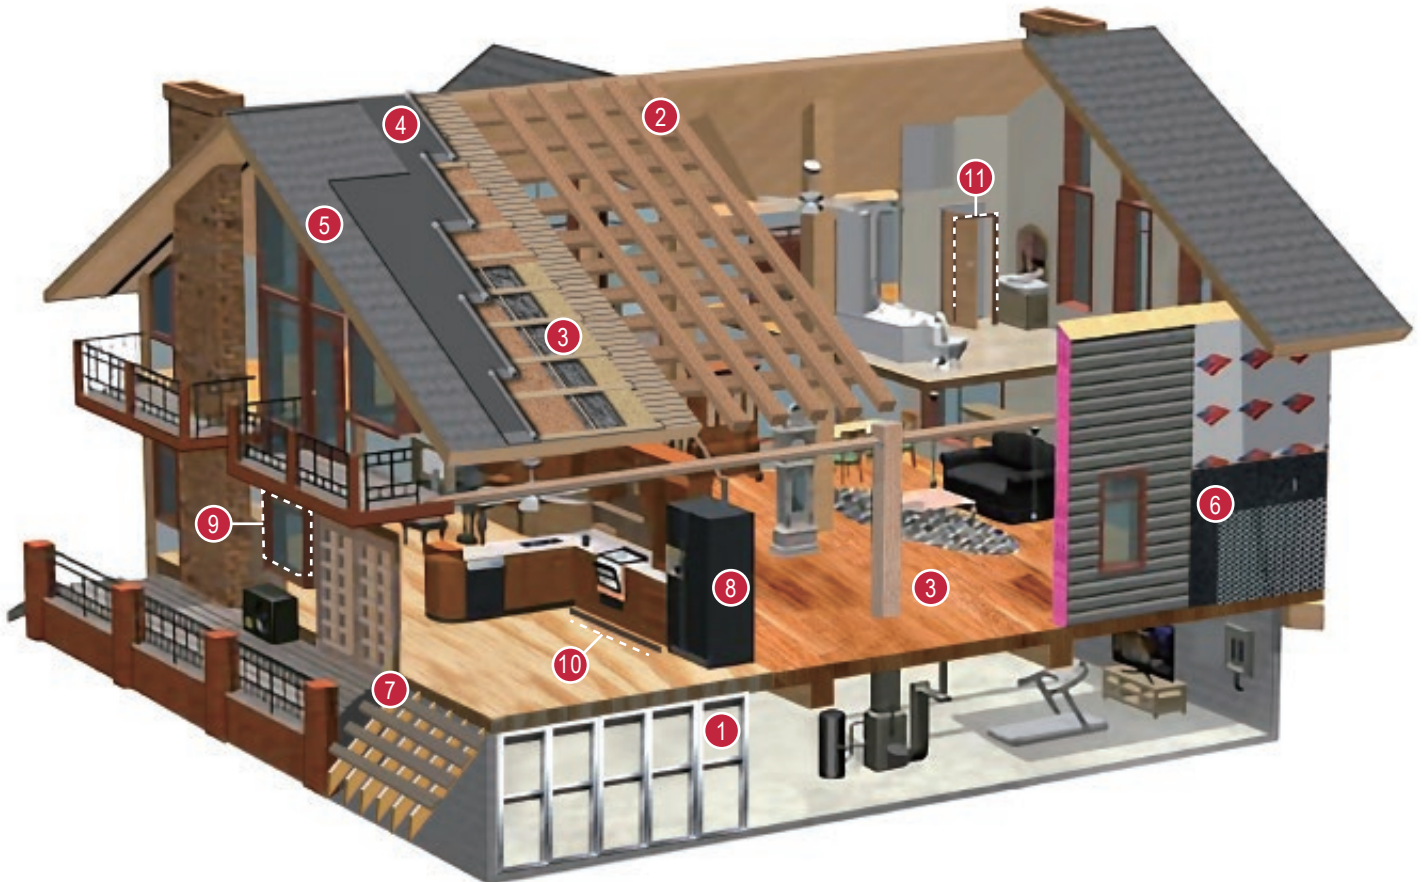

### 9 | Window / Doors & 10 | Base Molding



FN1850

### 11 | Crown Moulding



FS9240



FS9040



# Tool Recommendation by Flow of Construction

## 12 | Truss Plate



SN40GSW-14

## 13 | Joist Hanger



MCN40B

## 14 | Framing



FSN3490



FSN2283

## 16 | House Warp



FS9240BC

## 17 | Siding



SN50VS



SCN65C



SCN66B

## 18 | OSB / Plywood Floor Sheathing & 19 | Re-Flooting



PN65M-D



PN70-D



PN80-D



FSN3490



SN65Q



FSN2283

## 20 | Hardwood / Laminated Flooring



FS9240





FCN90B



FCN90LB



SCN90L




15 | OSB Board



PN57-D



PN58-D

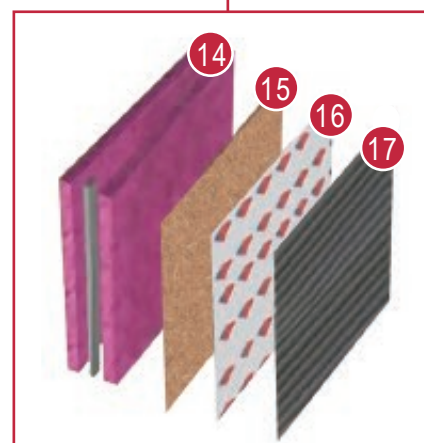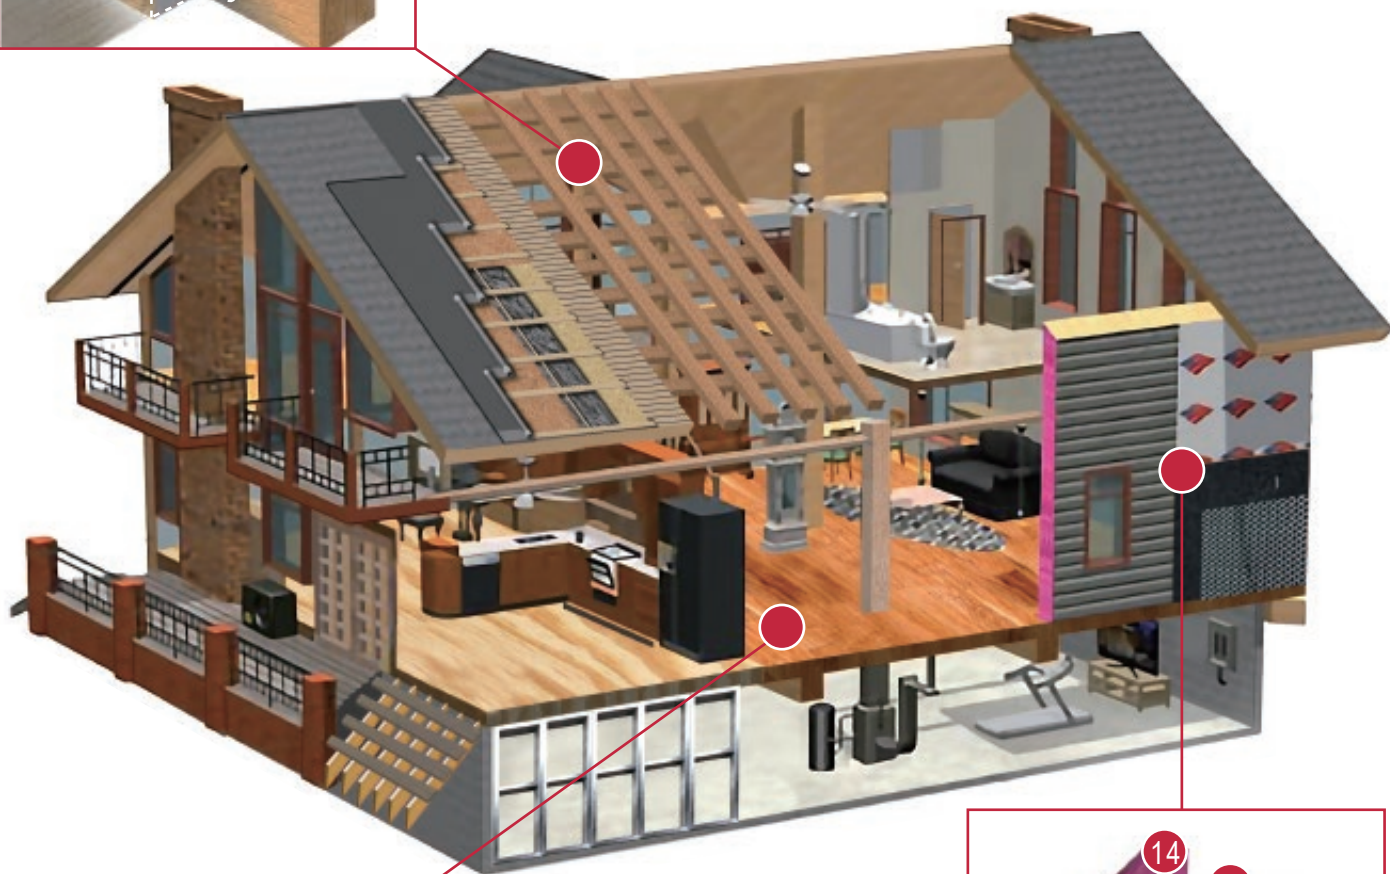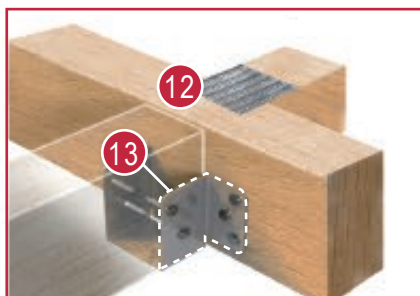



# Tool Recommendation: Manufactured Housing / Prefab

## 1 | Frame Sub-assembly



PN70PAL-JM



PN80PAL-JM



FSN34100-LM

## 2 | OSB or Plywood to Wood Frame & 4 | Sheathing / Plasterboard



PN70PAL-JM



PN80PAL-JM




FSN34100-LM



FSN2283-LM



SN50S53MAG

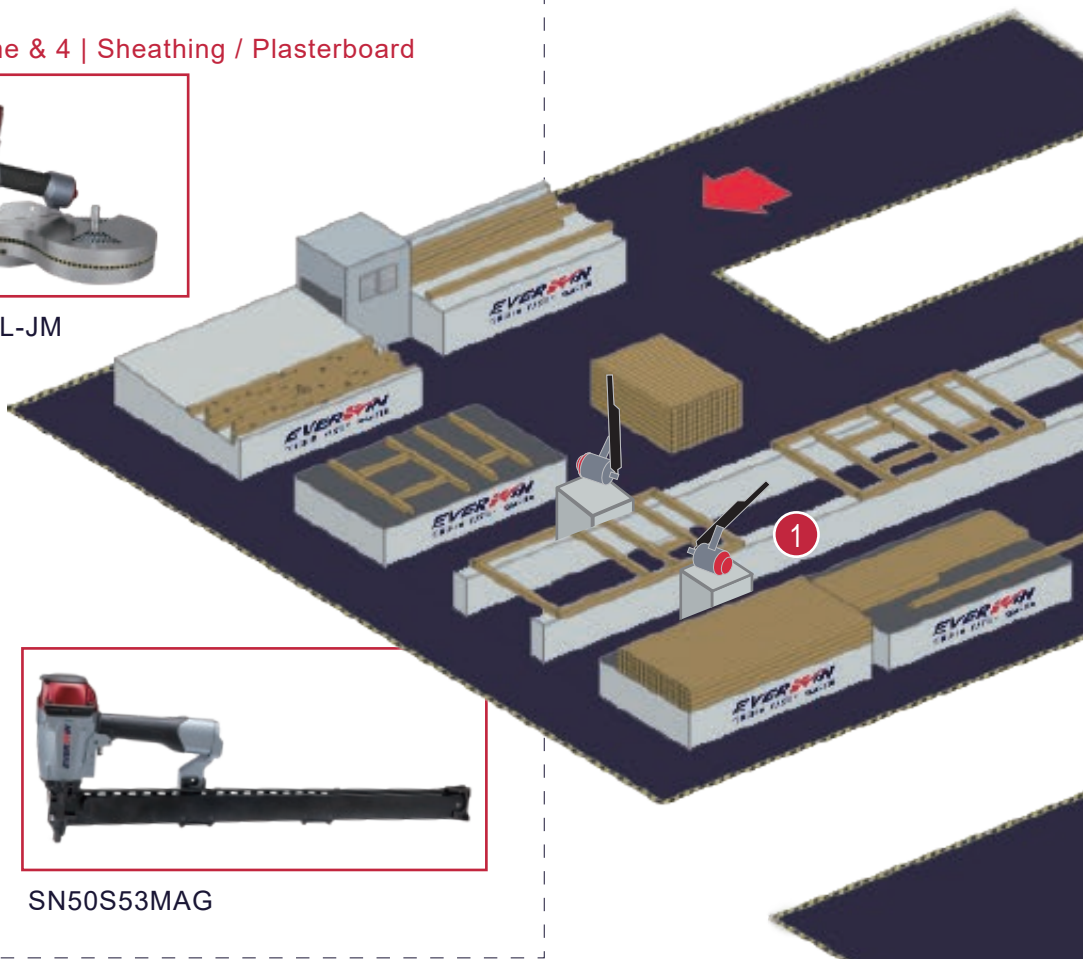

## 3 | Insulation



FS9240BC

## 5 | Window Press



FN1850PAL

1



Automation: FSN130-LM on frame sub-assembly





FSN2283-LM



FSN130-LM



Automation: PN80PAL-JM at a sheathing station



Automation: FSN2283 on a wallpanel bridge



FS9240BC securing insulation layers



# Tool Recommendation: Pallet Making / Repair

## 1 | Stringer Board to Block



PN65M



PN70



PN80



PN90

## 2 | Top Deck Board to Stringer Board & 3 | Bottom Deck to Block



PN90



PN100B

## 4 | Bottom Deck Board to Stringer & 5 | Top Deck Board to Stringer



PN57 / PN58 / PN59



PN65M



PN70



PN80



PN90

## 6 | Disassembly



DN20-60

## 7 | Deck Board to Stringer Board Reattachment (Clinching)



PN70CL

## 8 | Deck Board to Block Reattachment



PN90



PN100B

## 9 | Deck Board to Stringer Reattachment



PN57 / PN58 / PN59



PN65M



PN70



PN80



PN90



SN50 Series

## 10 | Split Stringer Repair



CFN-15S



SN40 Series

## Jumbo Magazine Assemblies Are Available For Selected Tool Models



PN70PAL-JM



PN80PAL-JM



PN70PAL

1



Automation: PN70PAL nailing decks to blocks

3



PN90 nailing bottom decks to pallet blocks


4




Automation: PN80PAL nailing decks to stringers







## Block Pallet

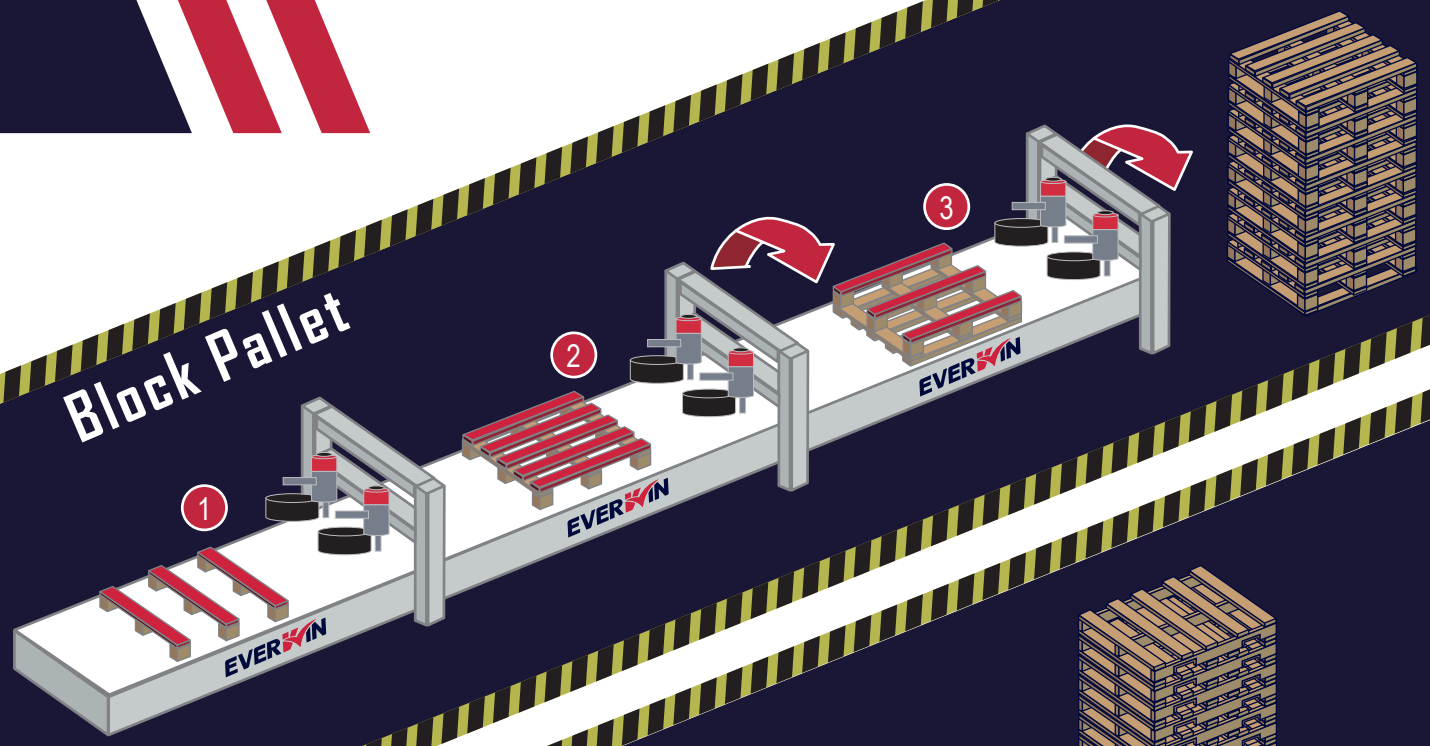

## String Pallet

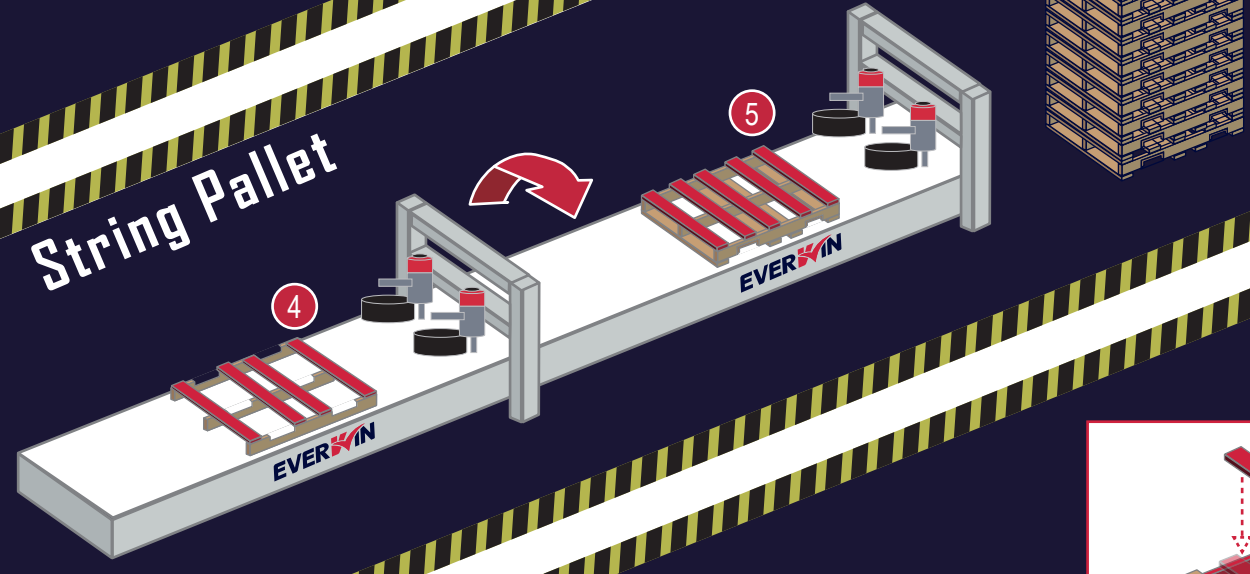

## Pallet Repair

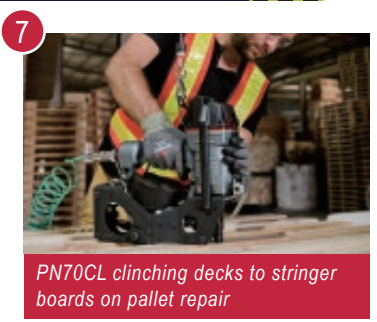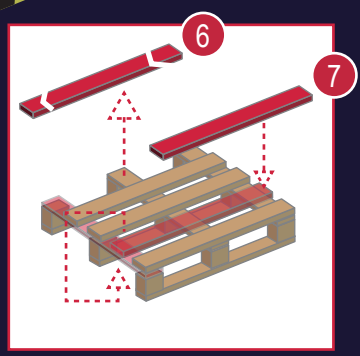

# Tool Recommendation: Crating

## 1 | Small Crating



FS9040



SN41 Series



CFN-15S

## 2 | Medium Crating



PN51



PN57 / PN58

## 4 | Corrugated Carton to Pallet



SN32-590W



FS9240BC

## 5 | Export Crating : Bottom – (Pallet Jacks) Stringers and Deck Boards



PN130B



FSN130



FSN160

## 6 | Export Crating : Side Walls & 7 | Export Crating : Top Plate or Board



PN51



PN57 / PN58 / PN59



PN65M



PN70



PN80



PN90

1



SN41S5 stapling a small wine crate

4



SN32-590W stapling carton to pallet on hard-to-reach spots

5



FSN160 securing deck boards to pallet jacks on a machinery crate





SN50

### 3 | Large Crating





PN65



PN80



PN90

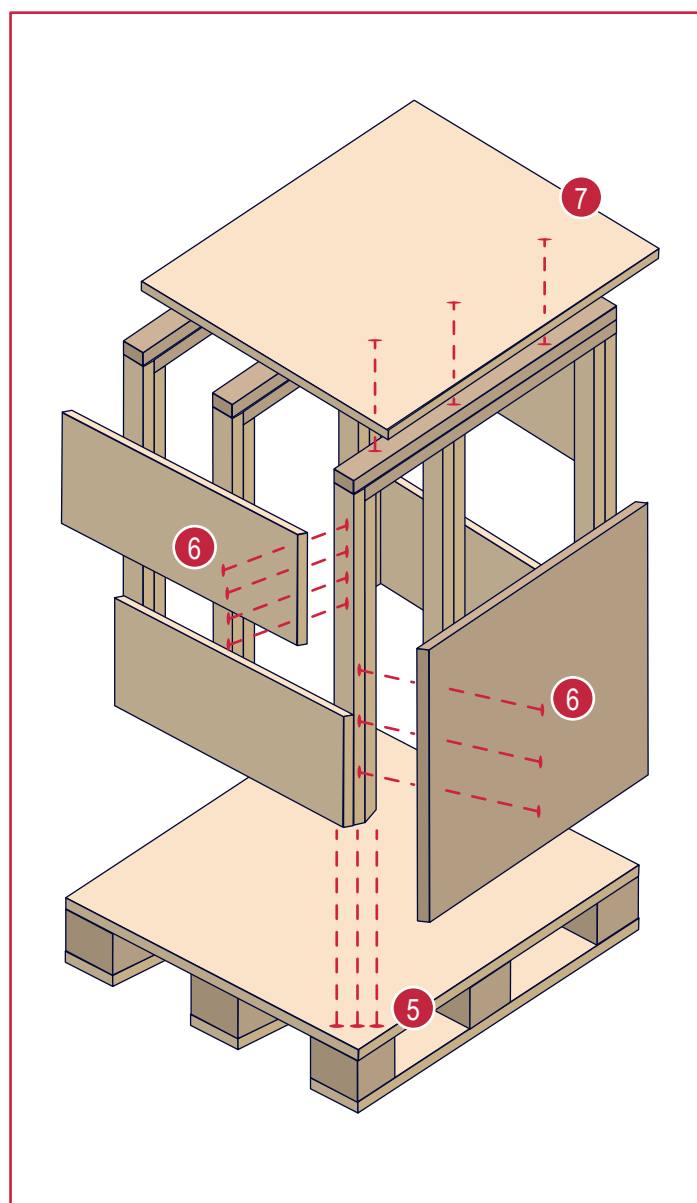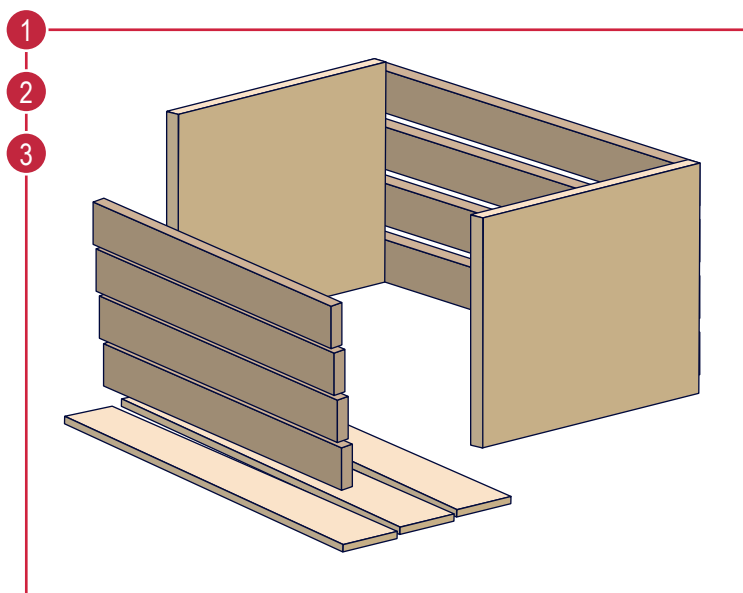

# Tool Recommendation: Furniture Manufacturing

## 1 | Knock-up / Furniture Frame Assembly



SN41 Series



SN50 series

## 2 | Brad to Door Casing



FN1850

## 3 | Drawer



FN1850



FS9040



US9716

## 4 | Caseback / Cabinet Face



FN1850



FS9040

## 5 | Fine trim



P635B



P650



P850



FN1850

## 6 | Upholstery



US series

## 7 | Angled Butt Joint



CFN-15S

## 8 | Box Frame Assembly



PN57 / PN58 / PN59



SN41 Series

## 9 | Spring to Base



ECAR Series

## 10 | Flange to Spring / Pocketed Coil Securing



HR Series



DR Series

1



SN50S5 assembling a chair frame

5



P650 applying fine trim to a cabinet

9







ECAR Stapling foundation spring to flat members

10




DR-SR15 clinching pocketed coils to the outer flange




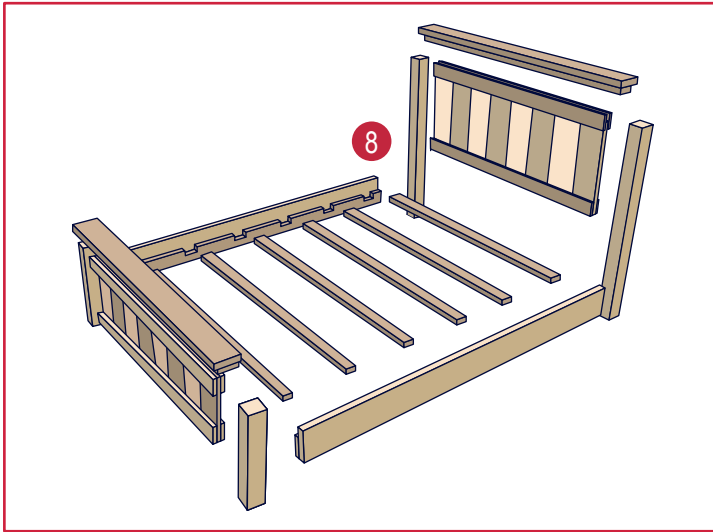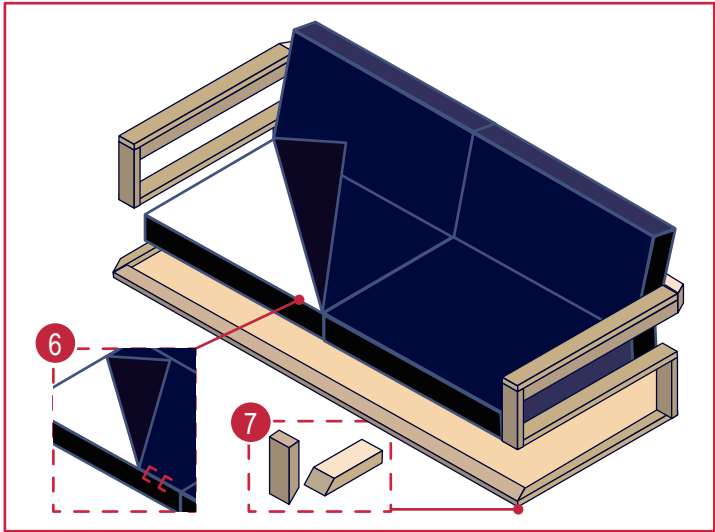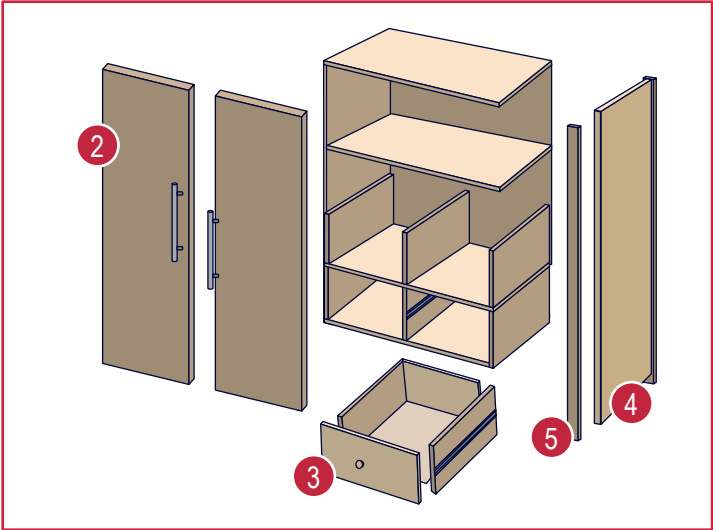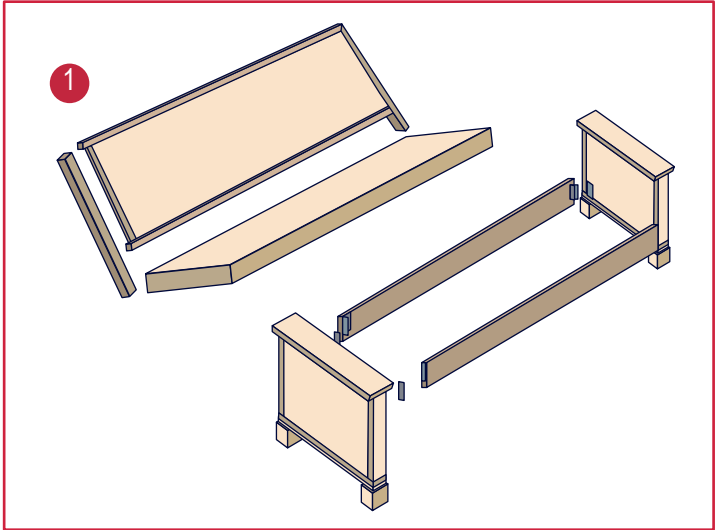

US7116 upholstering a sofa

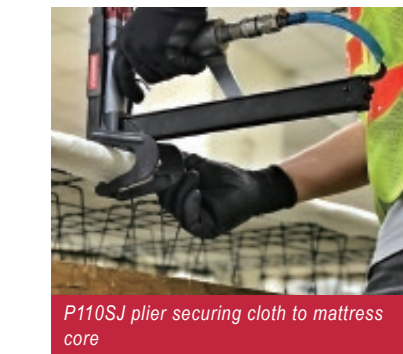

P110SJ plier securing cloth to mattress core

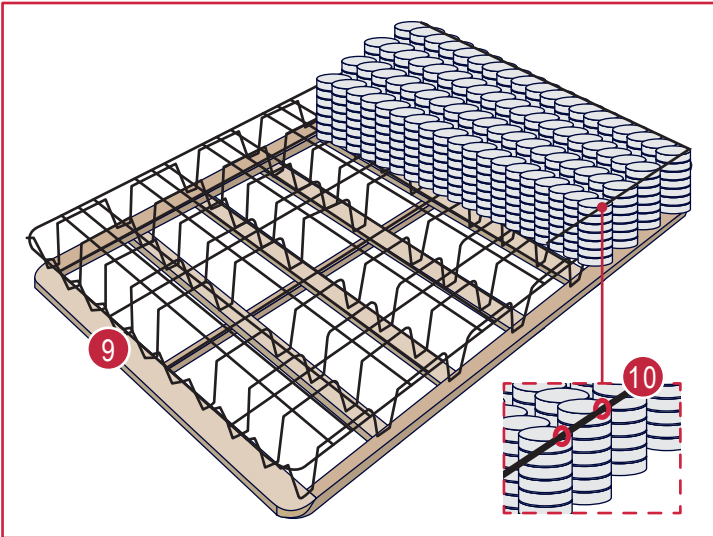

# 17

COIL NAILER



# 37

STRIP NAILER

# 44

FINISH NAILER



# 50

STAPLER

# 73

CARTON STAPLER



# 81

SPECIALTY TOOLS



# COIL NAILER

## FEATURE TABLE



**SEQUENTIAL TRIGGER**  
FULFILLS EUROPEAN  
SAFETY REGULATIONS



**ALUMINUM FRAME**



**AUXILIARY SIDE HANDLE**



**REMOTE CONTROL VALVE**  
SIGNAL-FED ACTUATION



**MAGNESIUM FRAME**



**360° ADJUSTABLE  
EXHAUST COVER**



**RAPID FIRE TRIGGER**  
UP TO 15 SHOTS/ SECOND



**RUBBER BODY PAD**  
PROTECTS WORK  
PIECE SURFACE



**ROBUST MAGAZINE**  
PROVEN IN TOUGHEST  
WORK ENVIRONMENTS



**DEPTH ADJUSTMENT**  
SETS FASTENERS  
AT DESIRED DEPTH



**METAL FRAME GUARD**  
PROTECTS TOOL  
BODY ON IMPACT



**NOSE SHROUD**  
PROVEN IN TOUGHEST  
WORK ENVIRONMENTS



- 1

420 IN-LBS OF DRIVING POWER
- 2

AVAILABLE WITH SEQUENTIAL TRIGGER
- 3

SPECIAL-TREATED DRIVER AND SAFETY
- GEARED FOR PALLET AND CRATE PRODUCTION
- INDUSTRY'S HIGHEST PITCH AND COLLATION TYPE COMPATIBILITY
- HIGH SPEED OPERATION, 15 SHOTS/SECOND




6.0mm & 6.8 mm  
PITCH NAILS

CONICAL & FLAT  
WELDED NAILS

PLASTIC & WIRE  
COLLATED NAILS



FASTENER SPECIFICATION	
Type	15° Wire & Plastic Collated Nails
Loading Capacity	200-400
A	25~50mm (1"~2")
B	4.2~5.3mm (0.165"~0.209")
C	2.1~2.3mm (0.083"~0.090")



TOOL SPECIFICATION	
Weight	2.0 kgs (4.4 lbs)
Height	271mm (10.6")
Width	126mm (4.9")
Length	246mm (9.6")
Operating Pressure	5~8 bar (70~120 psi)
Firing Mode	Rapid trigger or Sequential Trigger
Driving Power in-lbs @100 psi	420 In-lbs
Air Consumption L/cycle @90 psi	1.02 (2.16 cfm)
Applications	Wooden Pallet, Drum and Crate Construction



# PN57(B)

57mm Industrial Coil Nailer




- 1 AVAILABLE WITH SEQUENTIAL TRIGGER
- 2 SPECIAL-TREATED DRIVER AND SAFETY
- 3 DRIVER GUIDE MINIMIZES MAINTENANCE COST
- 4 HIGH SPEED OPERATION, 15 CYCLES/SECOND
- 5 POWERFUL FOR HEAVY DUTY APPLICATIONS



## FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	200~400
A	25~57mm (1"~2-1/4")
B	5.0~5.7mm (0.197"~0.224")
C	2.1~2.3mm (0.083"~0.090")

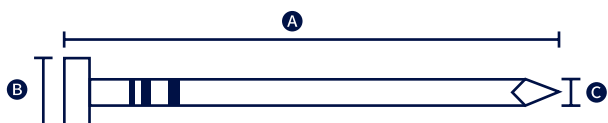

## TOOL SPECIFICATION

Weight	2.6 kgs (5.7 lbs)
Height	283mm (11.1")
Width	131mm (5.2")
Length	270mm (10.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	439 In-lbs
Air Consumption L/cycle @90 psi	1.13 (2.39 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

# PN58

57mm Industrial Coil Nailer

[ 13% EXTRA ENERGY ]




- 1 AVAILABLE WITH SEQUENTIAL TRIGGER
- 2 SPECIAL-TREATED DRIVER AND SAFETY
- 3 DRIVER GUIDE MINIMIZES MAINTENANCE COST
- 4 BOOSTED BUMPER EXTENDS TOOL LIFE SPAN
- 5 13% MORE POWERFUL THAN PN57
- 6 POWERFUL FOR HEAVY DUTY APPLICATIONS
- 7 ALSO AVAILABLE WITH THE FOLLOWING OPTIONS:

Variant Model#	Description
PN58-D	Version with industrial bolted depth adjustment. (10+ depth settings)



## FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	300~350
A	25~57mm (1"~2-1/4")
B	5.0~5.7mm (0.197"~0.224")
C	2.1~2.3mm (0.083"~0.090")



## TOOL SPECIFICATION

Weight	2.7 kgs (5.9 lbs)
Height	294mm (11.6")
Width	131mm (5.2")
Length	270mm (10.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	499 In-lbs
Air Consumption L/cycle @90 psi	1.3 (2.8 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

# PN59

57mm Industrial Coil Nailer




**[ 20% EXTRA ENERGY ]**

- 1 AVAILABLE WITH SEQUENTIAL TRIGGER
- 2 OPTIONAL, HEAVY DUTY DEPTH ADJUSTMENT
- 3 SPECIAL-TREATED DRIVER AND SAFETY
- 4 BOOSTED BUMPER EXTENDS TOOL LIFE SPAN
- 5 DRIVER GUIDE MINIMIZES MAINTENANCE COST
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- 20% MORE POWERFUL THAN PN57
- HIGH SPEED OPERATION, 15 CYCLES/SECOND



## FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	225~300
A	32~57mm (1-1/4"~2-1/4")
B	5.7~7.2mm (0.224"~0.283")
C	2.5~2.9mm (0.099"~0.113")

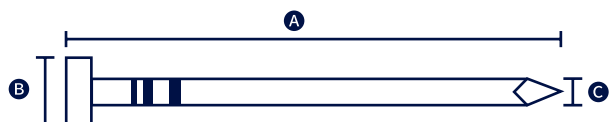

## TOOL SPECIFICATION

Weight	2.7 kgs (5.9 lbs)
Height	294mm (11.6")
Width	131mm (5.2")
Length	270mm (10.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	541 In-lbs
Air Consumption L/cycle @90 psi	1.3 (2.8 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

# PN65M

65mm Industrial Coil Nailer



**[ CLASS-LEADING POWER-WEIGHT RATIO ]**


- 1 AVAILABLE WITH SEQUENTIAL TRIGGER
- 2 OPTIONAL, HEAVY DUTY DEPTH ADJUSTMENT
- 3 SPECIAL-TREATED DRIVER AND SAFETY
- SUPERME POWER-WEIGHT RATIO
- HIGH SPEED OPERATION, 15 CYCLES/SECOND
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- ALSO AVAILABLE WITH THE FOLLOWING OPTIONS:

Variant Model#	Description
PN65M-D	Version with industrial bolted depth adjustment. (10+ depth settings)



## FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	225~300
A	38~65mm (1-1/2"~2-1/2")
B	5.7~7.2mm (0.224"~0.283")
C	2.3~2.9mm (0.092"~0.113")

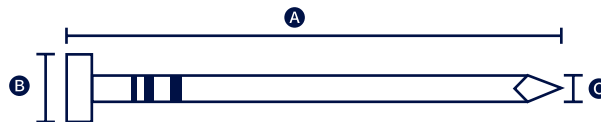

## TOOL SPECIFICATION

Weight	2.8 kgs (6.2 lbs)
Height	311mm (12.2")
Width	128mm (5")
Length	300mm (11.8")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	680 In-lbs
Air Consumption L/cycle @90 psi	1.7 (3.6 cfm)
Applications	Wooden Pallet, Drum and Crate Construction



# PN70

70mm Industrial Coil Nailer




- 1 AVAILABLE WITH SEQUENTIAL TRIGGER
- 2 SPECIAL-TREATED DRIVER AND SAFETY
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- HIGH SPEED OPERATION, 15 CYCLES/SECOND
- ALSO AVAILABLE WITH THE FOLLOWING OPTIONS:

Variant Model#	Description
PN70-D	Version with industrial bolted depth adjustment. (10+ depth settings)



## FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	225~300
A	45~70mm (1-3/4"~2-3/4")
B	5.7~7.2mm (0.224"~0.283")
C	2.3~2.9mm (0.092"~0.113")

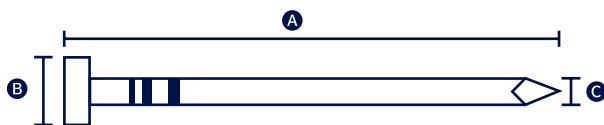

## TOOL SPECIFICATION

Weight	3.6 kgs (7.9 lbs)
Height	315mm (12.5")
Width	128mm (5")
Length	306mm (12")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	712 In-lbs
Air Consumption L/cycle @90 psi	1.7 (3.6 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

# PN70PAL

70mm Machine-Mounted Nailer




- 1 REMOTE CONTROL VALVE ASSEMBLY
- 2 GEARED WITH HIGH FLOW DRIVER GUIDE
- MACHINE MOUNTED
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- HIGH SPEED OPERATION, 15 CYCLES/SECOND



## FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	2000~3000
A	45~70mm (1-3/4"~2-3/4")
B	5.7~7.2mm (0.224"~0.283")
C	2.3~2.9mm (0.092"~0.113")

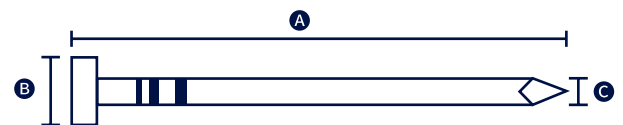

## TOOL SPECIFICATION

Weight	2.9 kgs (6.4 lbs)
Height	315mm (12.5")
Width	112mm (4.4")
Length	306mm (12")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	712 In-lbs
Air Consumption L/cycle @90 psi	1.7 (3.6 cfm)
Applications	Machine-mounted Automatic Operation

[ DREAM TOOL FOR  
PALLET REPAIR ]




Model#	Clinch Opening
PN70CL	44mm (1.7")
PN70CLB	59mm (2.3")

- 1 EQUIPPED WITH BACKUP ANVIL
- 2 CAP SHIELD COVERS ALL AIRLINES TO MINIMIZE MAINTENANCE
- 3 SECONDARD SAFETY HANDLE
- 4 HANGER BRACKET TO MINIMIZE FATIGUE
- 5 METAL BRACKET KEEPS ALL AIRLINES SHIELDED AND PROTECTED
- 6 STEEL FORGED, CYLINDER-ACTUATED CLINCH ARM
- 7 HIGH-SPEED STEEL ANVIL
- 8 DUST COVER BLOCKS NAILS OR WIRE CHIPS
- 9 INDUSTRY-LEADING CLINCH-YIELD RATE
- 10 PATENTED CLINCH SEQUENCE DESIGN
- 11 LIGHTEST & TOUGHEST TOOL IN CLASS
- 12 IDEAL FOR TOTAL BOARD THICKNESS: PN70CL 38mm (1.5")  
PN70CLB 46mm (1.8")



FASTENER SPECIFICATION	
Type	15° Wire Collated Nails
Loading Capacity	225~300
A	PN70CL 45mm (1-3/4") PN70CLB 58mm (2-1/4")
B	PN70CL 5.0~6.9mm (0.197"~0.270") PN70CLB 5.7~7.2mm (0.224"~0.283")
C	PN70CL 2.1~2.8mm (0.083"~0.110") PN70CLB 2.9mm (0.113")

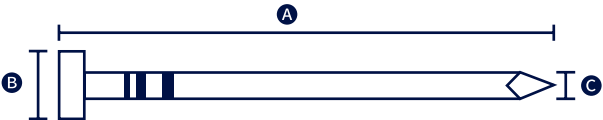

TOOL SPECIFICATION	
Weight	7.6 kgs (16.6 lbs)
Height	PN70CL: 405mm (15.9") PN70CLB: 420mm (16.5")
Width	139mm (5.5")
Length	370mm (14.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	712 In-lbs
Air Consumption L/cycle @90 psi	1.7 (3.6 cfm)
Applications	Pallet Repair Clinch Nailing



# PN80

83mm Industrial Coil Nailer




- 1 AVAILABLE WITH SEQUENTIAL TRIGGER
- 2 SPECIAL-TREATED DRIVER AND SAFETY
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- HIGH SPEED OPERATION, 15 CYCLES/SECOND



### FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	225~300
A	50~83mm (2"~3-1/4")
B	5.7~7.2mm (0.224"~0.283")
C	2.5~3.3mm (0.099"~0.131")

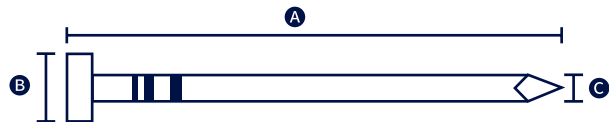

### TOOL SPECIFICATION

Weight	3.96 kgs (8.7 lbs)
Height	362mm (14.2")
Width	128mm (5")
Length	307mm (12.1")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	837 In-lbs
Air Consumption L/cycle @90 psi	1.8 (3.8 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

# PN80PAL

83mm Machine-Mounted Nailer




- 1 REMOTE CONTROL VALVE ASSEMBLY
- 2 GEARED WITH HIGH FLOW DRIVER GUIDE
- MACHINE MOUNTED
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- HIGH SPEED OPERATION, 15 CYCLES/SECOND



### FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	2000~3000
A	50~83mm (2"~3-1/4")
B	5.7~7.2mm (0.224"~0.283")
C	2.5~3.3mm (0.099"~0.131")

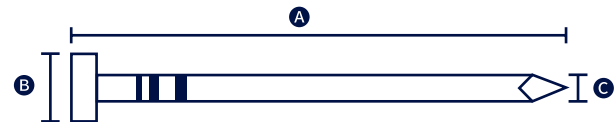

### TOOL SPECIFICATION

Weight	3.3 kgs (7.2 lbs)
Height	362mm (14.2")
Width	112mm (4.4")
Length	307mm (12.1")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	837 In-lbs
Air Consumption L/cycle @90 psi	1.8 (3.8 cfm)
Applications	Machine-mounted Automatic Operation

# PN90

90mm Industrial Coil Nailer




[INDUSTRY'S  
TOUGHEST]

- 1 AVAILABLE WITH SEQUENTIAL TRIGGER
- 2 SPECIAL-TREATED DRIVER AND SAFETY
- SUPERME POWER-WEIGHT RATIO
- HIGH SPEED OPERATION, 15 CYCLES/SECOND
- GEARED FOR PALLET AND CRATE PRODUCTION



### FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	150~300
A	50~90mm (2"~3-1/2")
B	6.5~7.7mm (0.256"~0.303")
C	2.5~3.8mm (0.099"~0.148")



### TOOL SPECIFICATION

Weight	3.7 kgs (8.2 lbs)
Height	350mm (13.8")
Width	131mm (5.2")
Length	302mm (11.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1050 In-lbs
Air Consumption L/cycle @90 psi	2.1 (4.4 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

# PN90PAL

90mm Machine-Mounted Nailer




[MACHINE  
MOUNTED]

- 1 REMOTE CONTROL VALVE ASSEMBLY
- 2 GEARED WITH HIGH FLOW DRIVER GUIDE
- MACHINE MOUNTED
- HIGH SPEED OPERATION, 10 SHOTS/SECOND
- FITTED WITH 3/8" NPT FOR 3/8" AIR PLUG



### FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	User Dependent
A	50~90mm (2"~3-1/2")
B	6.5~7.7mm (0.256"~0.303")
C	2.5~3.8mm (0.099"~0.148")



### TOOL SPECIFICATION

Weight	2.97 kgs (6.5 lbs)
Height	350mm (13.8")
Width	120mm (4.7")
Length	302mm (11.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1050 In-lbs
Air Consumption L/cycle @90 psi	2.1 (4.4 cfm)
Applications	Machine-Mounting Wooden Pallet/ Panel/ Crate



PN100(B)

100mm Industrial Coil Nailer




- 1 OPTIONAL SHOCK-ABSORBENT SIDE HANDLE
- 2 AVAILABLE WITH SEQUENTIAL RIGGER
- 3 POWERFUL FOR HEAVY DUTY APPLICATIONS
- 4 FAST CYCLE TIME BOOSTS EFFICIENCY
- 5 ROBUST DESIGN FOR PROVEN DURABILITY



FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	200~300
A	65~100mm (2-1/2"~4")
B	6.5~7.5mm (0.256"~0.295")
C	2.5~3.3mm (0.099"~0.131")

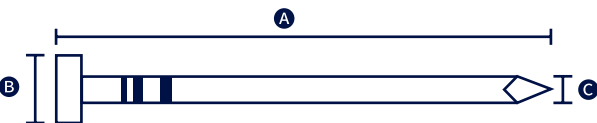

TOOL SPECIFICATION

Weight	5.5 kgs (12.1 lbs)
Height	417mm (16.4")
Width	156mm (6.1")
Length	338mm (13.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1470 In-lbs
Air Consumption L/cycle @90 psi	3.2 (6.8 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

PN100CP

100mm Industrial Coil Nailer




SAFE & ERGONOMIC

- 1 TOOL HANGER SET INCLUSIVE
- 2 TOOL HANGER & 3MM NOSE SHROUD AVAILABLE
- 3 SECONDARY SAFETY HANDLE
- 4 APPROVED BY CHEP CORPORATE
- 5 FAST CYCLE TIME BOOSTS EFFICIENCY
- 6 ROBUST DESIGN FOR PROVEN DURABILITY



FASTENER SPECIFICATION

Type	15° Wire Collated Nails
Loading Capacity	225
A	65~100mm (2-1/2"~4")
B	7.2mm (0.283")
C	3.4mm (0.135")

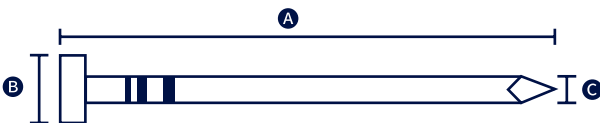

TOOL SPECIFICATION

Weight	5.9 kgs (13 lbs)
Height	417mm (16.4")
Width	156mm (6.1")
Length	338mm (13.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1470 In-lbs
Air Consumption L/cycle @90 psi	3.2 (6.8 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

PN100EPAL


100mm EPAL Coil Nailer



- 1 OPTIONAL SHOCK-ABSORBENT SIDE HANDLE
- 2 AVAILABLE WITH SEQUENTIAL RIGGER
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- FAST CYCLE TIME BOOSTS EFFICIENCY
- ROBUST DESIGN FOR PROVEN DURABILITY
- TOOL HANGER & 3MM NOSE SHROUD AVAILABLE



FASTENER SPECIFICATION	
Type	15° Wire Collated Nails
Loading Capacity	215
A	70~90mm(2-3/4"~3-1/2")
B	8.6mm(0.339")
C	3.5mm(0.138")

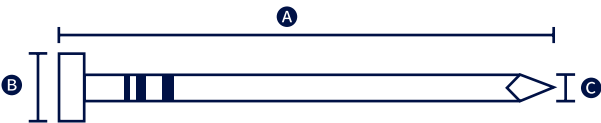

TOOL SPECIFICATION	
Weight	5.5 kgs (12.1 lbs)
Height	417mm (16.4")
Width	156mm (6.1")
Length	338mm (13.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1470 In-lbs
Air Consumption L/cycle @90 psi	3.2 (6.8 cfm)
Applications	Wooden Pallet, Drum and Crate Construction

PN130B

130mm Industrial Coil Nailer


[ MORE CONSISTENT FEEDING  
REINFORCED STRUCTURE ]



- 1 SHOCK-ABSORBENT AUXILIARY SIDE HANDLE
- 2 AVAILABLE WITH CONTACT FIRE TRIGGER
- POWERFUL FOR HEAVY DUTY APPLICATIONS
- FAST CYCLE TIME BOOSTS EFFICIENCY



FASTENER SPECIFICATION	
Type	15° Wire Collated Nails
Loading Capacity	120-225
A	90~130mm (3-1/2"~5-1/8")
B	7.5~8.6mm (0.295"~0.338")
C	3.3~3.8mm (0.131"~0.150")



TOOL SPECIFICATION	
Weight	6.0 kgs (13.2 lbs)
Height	467mm (18.4")
Width	156mm (6.1")
Length	338mm (13.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1811 In-lbs
Air Consumption L/cycle @90 psi	3.3 (7.0 cfm)
Applications	Wooden Pallet, Drum and Crate Construction



# ACCESSORIES AND ATTACHMENTS

**BOTH HANDS REQUIRED FOR ACTUATION  
HELPS MINIMIZE WORKPLACE ACCIDENTS**



Available for PN57 series, PN70, PN80, PN100

**SECONDARY HANDLE**



**HANGER BRACKET SET**

**INVESTMENT-CASTED  
FOR ULTIMATE DURABILITY**

**RCVA1** (#103946)  
Straight Fitting Type



**RCVA2** (#103440)  
Elbow Fitting Type





**REMOTE CONTROL VALVE**



Available for PN57 series, PN65, PN70, PN80

**HEAVY DUTY DEPTH ADJUSTMENT**

**CONTACT ARM ENGAGEMENT REQUIRED FOR  
ACTUATION, BOOSTS WORK AREA SAFETY**

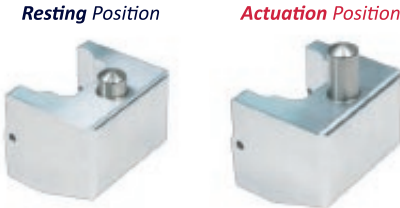

**TRIGGER BLOCK ASSEMBLY**

- 1 TOOL-FREE DEPTH ADJUSTMENT KNOB
  - 2 EQUIPPED WITH TRIGGER MODE SWITCH
  - ROTATABLE BELT HOOK
- 420 IN-LBS OF DRIVING POWER
  - INDUSTRY'S HIGHEST PITCH AND COLLATION TYPE COMPATIBILITY
  - HIGH SPEED OPERATION, 15 SHOTS/SECOND




6.0mm & 6.8 mm  
PITCH NAILS

CONICAL & FLAT  
WELDED NAILS

PLASTIC & WIRE  
COLLATED NAILS



FASTENER SPECIFICATION	
Type	15° Wire & Plastic Collated Nails
Loading Capacity	200-400
A	Wire: 32-50mm (1-1/4"~2") Plastic: 25~50mm(1"~2")
B	4.2~5.3mm (0.165"~0.209")
C	2.1~2.3mm (0.083"~0.090")

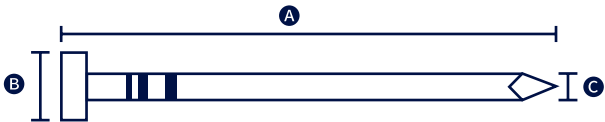

TOOL SPECIFICATION	
Weight	2.0 kgs (4.4 lbs)
Height	271mm (10.6")
Width	126mm (4.9")
Length	246mm (9.6")
Operating Pressure	5~8 bar (70~120 psi)
Firing Mode	Switchable Trigger
Driving Power in-lbs @100 psi	420 In-lbs
Air Consumption L/cycle @90 psi	1.07 (2.26 cfm)

Applications      Siding, Fencing, Sheathing and Light Crating



# SCN66B

65mm 0° Plastic Collated Smart Coil Nailer

- 1

360° ADJUSTABLE EXHAUST COVER
- 2

METAL BELT HOOK
- 3

NO-MAR PAD INCLUSIVE
- 4

TOOL-FREE DEPTH ADJUSTMENT
- 5

ROBUST ENGINEERED NYLON MAGAZINE

6

TRIGGER LOCK

7

ONE-STEP OPENING MAGAZINE LATCH

●

PATENTED PRECISION NAILING TECHNOLOGY


●

TWO TRIGGER OPTIONS AVAILABLE:  
SCN66B-ST (Sequential) / SCN66B-CT (Contact)

MAXIMAL EFFICIENCY  
with  
MINIMAL ERROR



FASTENER SPECIFICATION	
Type	0° Plastic Collated Nails
Loading Capacity	300
A	32~65mm (1-1/4"~2-1/2")
B	5.5~6.0mm (0.216"~0.236")
C	2.0~2.8mm (0.080"~0.110")



TOOL SPECIFICATION	
Weight	2.3 kgs (5.0 lbs)
Height	290mm (11.4")
Width	146mm (5.7")
Length	290mm (11.4")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	530 In-lbs
Air Consumption L/cycle @90 psi	1.1 (2.3 cfm)
Applications	Decking, Furring, Siding Wooden Fencing, Subfloors Sheathing and Framing



# Siding Has Never Been So Easy

---

**PRECISION NAILING** Tech  
Class-Leading **POWER**





- 1

360° ADJUSTABLE EXHAUST COVER
- 2

METAL BELT HOOK
- 3

NO-MAR PAD INCLUSIVE
- 4

TOOL-FREE DEPTH ADJUSTMENT
- 5

ROBUST ENGINEERED NYLON MAGAZINE
- 6


TRIGGER LOCK
- PATENTED PRECISION NAILING TECHNOLOGY
- TWO TRIGGER OPTIONS AVAILABLE:  
SCN65C-ST (Sequential) / SCN65C-CT (Contact)



MAXIMAL EFFICIENCY  
with  
MINIMAL ERROR



FASTENER SPECIFICATION		
Type	15° Wire Plastic Collated Nails	
Loading Capacity	200~400	
A	Wire: 38~65mm (1-1/2"~2-1/2") Plastic: 32~65mm (1-1/4"~2-1/2")	
B	4.5~7.0mm (0.179"~0.275")	
C	2.1~2.5mm (0.083"~0.099")	



TOOL SPECIFICATION	
Weight	2.3 kgs (5.0 lbs)
Height	297mm (11.7")
Width	127mm (5")
Length	272mm (10.7")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	530 In-lbs
Air Consumption L/cycle @90 psi	1.1 (2.3 cfm)
Applications	Sliding, Fencing, Sheathing and Framing

# SCN65B-CM

Construction 65mm 15° Dual Collated Conical Coil Nailer

- 1

PATENTED PRECISION NAILING TECHNOLOGY
- 2

TOOL-FREE DEPTH ADJUSTMENT
- 3

NO-MAR PAD INCLUSIVE
- 4

METAL BELT HOOK
- 5

CUSHIONED RUBBER GRIP & ERGONOMIC FRAME
- 6

TRIGGER LOCK
- 7


360 DEGREE ADJUSTABLE EXHAUST COVER
- 8

ONE-STEP OPENING MAGAZINE LATCH
- 9

ROBUST ENGINEERED CONICAL NYLON MAGAZINE
- 530 IN-LB. OF DRIVING FORCE
- TWO TRIGGER OPTIONS AVAILABLE:  
SCN65B-CM-ST (Sequential) / SCN65B-CM-CT (Contact)



FASTENER SPECIFICATION	
Type	15° Wire & Plastic Collated Nails
Loading Capacity	200~400
A	Wire: 38~65 (1-1/2"~2-1/2")
	Plastic: 32~65 (1-1/4"~2-1/2")
B	4.5~7mm (0.179"~0.275")
C	2.1~2.5mm (0.083"~0.099")



TOOL SPECIFICATION	
Weight	2.45kgs (5.4 lbs)
Height	297mm (11.7")
Width	127mm (5")
Length	272mm (10.7")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	530 In-lbs
Air Consumption L/cycle @90 psi	1.1 (2.3 cfm)
Applications	Siding, Fencing, Sheathing and Framing

- 1

METAL EXHAUST COVER
- 2

46mm WIDE ROTATABLE RAFTER HOOK
- 3

NO-MAR PAD INCLUSIVE
- 4

TOOL-FREE DEPTH ADJUSTMENT
- 5

ROBUST ENGINEERED NYLON MAGAZINE
- 6

CUSHIONED RUBBER GRIP & ERGONOMIC FRAME
- SERRATED CONTACT TIP, DURABLE NOSE & NOSE SHROUD
- TWO TRIGGER OPTIONS AVAILABLE:  
FCN90B-ST (Sequential) / FCN90B-CT (Contact)

335mm

13.2"


COMPACT HEIGHT

FITS BETWEEN

STANDARD C-C STUDS



FASTENER SPECIFICATION	
Type	15° Wire Collated Nails
Loading Capacity	150~300
A	50~90mm (2"~3-1/2")
B	6.5~7.7mm (0.256"~0.303")
C	2.5~3.8mm (0.099"~0.148")



TOOL SPECIFICATION	
Weight	3.5 kgs (7.7 lbs)
Height	335mm (13.2")
Width	131mm (5.2")
Length	302mm (11.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1000 In-lbs
Air Consumption L/cycle @90 psi	2.0 (4.2 cfm)
Applications	Framing, Sheathing , General Construction



- 1

46mm WIDE ROTATABLE RAFTER HOOK
- 2


SERRATED SAFETY TIP FOR TOE-NAILING
- 3

METAL EXHAUST COVER
- 4

NO-MAR PAD INCLUSIVE
- INDUSTRY LEADING POWER-WEIGHT RATIO
- RAPID CYCLING VALVE, 10 CYCLES/SECOND



FASTENER SPECIFICATION	
Type	15° Wire & Plastic Collated Nails
Loading Capacity	150~300
A	50~90mm (2"~3-1/2")
B	6.5~7.7mm (0.256"~0.303")
C	Wire: 2.5~3.8mm (0.099"~0.148") Plastic: 2.5~2.9mm (0.099"~0.113")



TOOL SPECIFICATION	
Weight	3.0 kgs (6.6 lbs)
Height	364mm (14.3")
Width	130mm (5.1")
Length	311mm (12.2")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	890 In-lbs
Air Consumption L/cycle @90 psi	1.6 (3.4 cfm)
Applications	Framing, Sheathing Decking, Subfloors General Construction



# FCN90L

**3.0 KGS** In Weight  
**Side, Deck, Frame, ALL IN ONE.**  
**INDUSTRY'S LIGHTEST 90mm Coil Nailer**



**PTIA 2017**

TOOL INNOVATION AWARDS WINNER



- 1

PATENTED PRECISION NAILING TECHNOLOGY
- 2

NO-MAR PAD INCLUSIVE
- 3

46mm WIDE ROTATABLE RAFTER HOOK
- 4

SERRATED SAFETY TIP FOR TOE-NAILING
- 5

PLASTIC COLLATED NAILS COMPATIBLE
- 6


WORLD'S LIGHTEST 90mm COIL NAILER
- RAPID CYCLING VALVE, 10 CYCLES/SECOND
- TWO TRIGGER OPTIONS AVAILABLE:  
FCN90LB-ST (Sequential) / FCN90LB-CT (Contact)



MAXIMAL EFFICIENCY  
with  
MINIMAL ERROR



FASTENER SPECIFICATION	
Type	15° Wire & Plastic Collated Nails
Loading Capacity	150~300
A	50~90mm (2"~3-1/2")
B	6.5~7.7mm (0.256"~0.303")
C	Wire: 2.5~3.8mm (0.099"~0.148") Plastic: 2.5~3.3mm(0.099"~0.131")

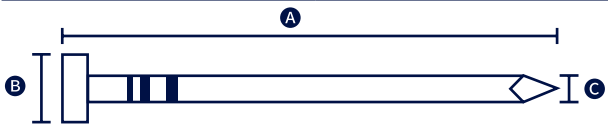

TOOL SPECIFICATION	
Weight	3.0 kgs (6.6 lbs)
Height	364mm (14.3")
Width	130mm (5.1")
Length	311mm (12.2")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	850 In-lbs
Air Consumption L/cycle @90 psi	1.6 (3.4 cfm)
Applications	Framing, Sheathing, General Construction



# STRIP NAILER

## FEATURE TABLE



**SEQUENTIAL TRIGGER**  
FULFILLS EUROPEAN  
SAFETY REGULATIONS



**ALUMINUM FRAME**



**AUXILIARY SIDE HANDLE**



**REMOTE CONTROL VALVE**  
SIGNAL -FED ACTUATION



**MAGNESIUM FRAME**



**360° ADJUSTABLE  
EXHAUST COVER**



**RAPID FIRE TRIGGER**  
UP TO 15 SHOTS / SECOND



**RUBBER BODY PAD**  
PROTECTS WORK  
PIECE SURFACE



**ROBUST MAGAZINE**  
PROVEN IN TOUGHEST  
WORK ENVIRONMENTS



**DEPTH ADJUSTMENT**  
SETS FASTENERS  
AT DESIRED DEPTH



**METAL FRAME GUARD**  
PROTECTS TOOL  
BODY ON IMPACT



# FSN3490

90mm 34° Paper Collated Compact Strip Nailer

- 1

METAL EXHAUST COVER
- 2

46mm WIDE ROTATABLE RAFTER HOOK
- 3

NO-MAR PAD INCLUSIVE
- 4

TOOL-FREE DEPTH ADJUSTMENT
- 5

INVESTMENT CASTED PUSHER
- 6

CUSHIONED RUBBER GRIP & ERGONOMIC FRAME
- 7

TOP-LOADING ALL-METAL MAGAZINE
- SERRATED CONTACT TIP
- ULTRA-SLIM NOSE
- TWO TRIGGER OPTIONS AVAILABLE:  
FSN3490-ST (Sequential) / FSN3490-CT (Contact)


NEW IN  
2022

335mm  
13.2"  
COMPACT HEIGHT

FITS BETWEEN  
STANDARD C-C STUDS



FASTENER SPECIFICATION	
Type	34° Paper Collated Nails
Loading Capacity	90
A	50~90mm (2"~3-1/2")
B	6.5~7.7mm (0.256"~0.303")
C	2.9~3.3mm (0.113"~0.131")

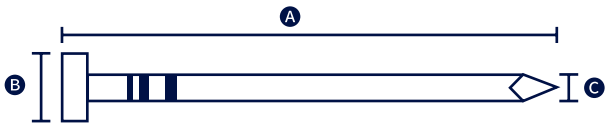

TOOL SPECIFICATION	
Weight	3.6 kgs (7.9 lbs)
Height	335mm (13.2")
Width	158mm (6.2")
Length	467mm (18.4")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1000 In-lbs
Air Consumption L/cycle @90 psi	2.5 (5.3 cfm)
Applications	Framing, Sheathing, Decking, Subfloors, General Construction

# FSN2283A

90mm 21° Strip Nailer




## FRAMING WORKHORSE

- 1 DUCTILE ALUMINUM EXTRUSION MAGAZINE
- 2 SINGLE-PIECE CASTED CAP ASSEMBLY
- 3 HARDENED AGGRESSIVE TOE-NAIL SAFETY
- 4 SEQUENTIAL FIRE TRIGGER AVAILABLE
- 5 FAST CYCLE TIME BOOSTS EFFICIENCY
- 6 POWERFUL FOR HEAVY DUTY APPLICATIONS



FASTENER SPECIFICATION	
Type	21° Plastic Collated Nails
Loading Capacity	70
A	50~90mm(2"~3-1/2")
B	6.8~8.0mm(0.268"~0.315")
C	2.9~3.8mm (0.113"~0.148")

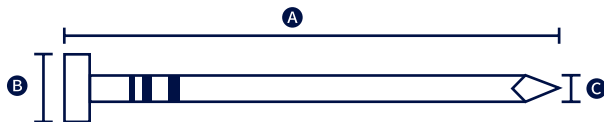

TOOL SPECIFICATION	
Weight	3.7 kgs (8.2 lbs)
Height	340mm (13.4")
Width	120mm (4.7")
Length	523mm (20.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	823 In-lbs
Air Consumption L/cycle @90 psi	2.1 (4.4 cfm)
Applications	Sheathing, Framing, General Construction

# FSN2283AD


90mm 21° Strip Nailer



- 1 DUCTILE ALUMINUM EXTRUSION MAGAZINE
- 2 SINGLE-PIECE CASTED CAP ASSEMBLY
- 3 TOOL-FREE DEPTH ADJUSTMENT
- 4 HARDENED AGGRESSIVE TOE-NAIL SAFETY
- 5 SEQUENTIAL FIRE TRIGGER AVAILABLE
- 6 FAST CYCLE TIME BOOSTS EFFICIENCY
- 7 POWERFUL FOR HEAVY DUTY APPLICATIONS



FASTENER SPECIFICATION	
Type	21° Plastic Collated Nails
Loading Capacity	70
A	50~90mm(2"~3-1/2")
B	6.8~8.0mm(0.268"~0.315")
C	2.9~3.8mm (0.113"~0.148")

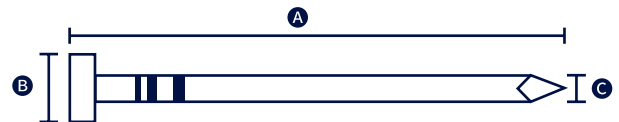

TOOL SPECIFICATION	
Weight	3.7 kgs (8.2 lbs)
Height	340mm (13.4")
Width	120mm (4.7")
Length	523mm (20.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	823 In-lbs
Air Consumption L/cycle @90 psi	2.1 (4.4 cfm)
Applications	Sheathing, Framing, General Construction



# Class-Leading Power At The Palm Of Your Hands

---

**HEAVY DUTY CRATING INDUSTRY** Geared  
Post Frame LVL **DREAM TOOL**



# FSN130C

130mm 21° Industrial Strip Nailer

# FSN160

160mm 21° Industrial Strip Nailer

**JUMBO  
NAILER**



- 1 DUCTILE ALUMINUM EXTRUSION MAGAZINE
- 2 SHOCK-ABSORBENT AUXILIARY SIDE HANDLE
- 3 AVAILABLE WITH CONTACT FIRE TRIGGER
- PATENTED SHOCK-PROOF MAGAZINE PAD
- FAST CYCLE TIME BOOSTS EFFICIENCY
- POWERFUL FOR HEAVY DUTY APPLICATIONS




- 1 DUCTILE ALUMINUM EXTRUSION MAGAZINE
- 2 SHOCK-ABSORBENT AUXILIARY SIDE HANDLE
- 3 AVAILABLE WITH CONTACT FIRE TRIGGER
- PATENTED SHOCK-PROOF MAGAZINE PAD
- FAST CYCLE TIME BOOSTS EFFICIENCY
- POWERFUL FOR HEAVY DUTY APPLICATIONS



## FASTENER SPECIFICATION

Type	21° Plastic Collated Nails
Loading Capacity	60
A	90~130mm (3-1/2"~5-1/8")
B	FSN130C: 7.2~8.5mm (0.283"~0.334") FSN130B: 8.2~8.5mm (0.323"~0.334")
C	FSN130C: 3.3~3.8mm (0.131"~0.148") FSN130B: 3.8~4.2mm (0.148"~0.165")

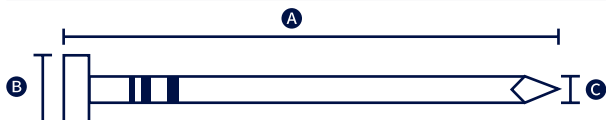


## TOOL SPECIFICATION

Weight	6.1 kgs (13.5 lbs)
Height	478mm (18.8")
Width	145mm (5.7")
Length	523mm (20.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	1811 In-lbs
Air Consumption L/cycle @90 psi	3.5 (7.4 cfm)
Applications	Export Packing, Ctrate Construction



## FASTENER SPECIFICATION

Type	21° Plastic Collated Nails
Loading Capacity	56
A	100~160mm (4"~6-1/4")
B	8.2~9.3mm (0.323"~0.366")
C	3.8~4.6mm (0.148"~0.181")

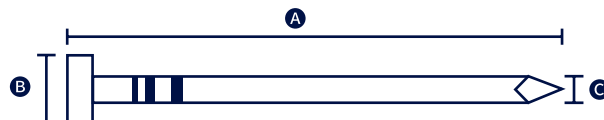

## TOOL SPECIFICATION

Weight	6.9 kgs (15.2 lbs)
Height	538mm (21.2")
Width	145mm (5.7")
Length	568mm (22.4")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	2198 In-lbs
Air Consumption L/cycle @90 psi	4.2 (8.9 cfm)
Applications	Export Packing, Ctrate Construction





# Joist Hanger Installation Made Safe And Easy

---

**ANTI-NAIL BACKUP** Mechanism  
Low Nail **LOCKOUT**  
**POWERFUL** Engine

# MCN40B


40mm 34° Paper Collated Joist Hanger Nailer

- 1 LOW NAIL LOCKOUT PREVENTS DRY FIRES
- 2 ANTI NAIL BACK UP PAWL BOOSTS OPERATION STABILITY
- 3 ROTATABLE BELT HOOK

- COMPACT DESIGN FITS BETWEEN 12" O.C. JOISTS
- POWERFUL ENGINE SINKS NAILS WITH CONSISTENCY
- FULL MECHANICAL DESIGN BOOSTS EASE OF MAINTENANCE



FASTENER SPECIFICATION	
Type	34° Paper Collated Nails
Loading Capacity	33
A	38~40mm (1-1/2")
B	7.01~7.36mm (0.276"~0.290")
C	3.3mm & 3.8mm (0.131" & 0.148")

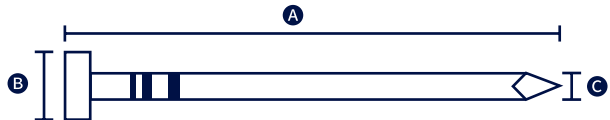

TOOL SPECIFICATION	
Weight	2.0 kgs (4.4 lbs)
Height	275mm (10.8")
Width	92mm (3.6")
Length	298mm (11.7")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	486 in-lbs
Air Consumption L/cycle @90 psi	1.8 (3.8 cfm)
Applications	Strapping, Joist Hangers Hurricane Ties, Rafter Ties, Post Bases, Caps Anchors



# FINISH / TRIM NAILER

## FEATURE TABLE



**ALUMINUM FRAME**



**360° ADJUSTABLE  
EXHAUST COVER**



**DEPTH ADJUSTMENT**

SETS FASTENERS  
AT DESIRED DEPTH



**ROBUST MAGAZINE**

PROVEN IN TOUGHEST  
WORK ENVIRONMENTS




**METAL FRAME GUARD**

PROTECTS TOOL  
BODY ON IMPACT



**REAR EXHAUST**

DIRECTS EXHAUST  
AWAY FROM USER / WORK PIECE

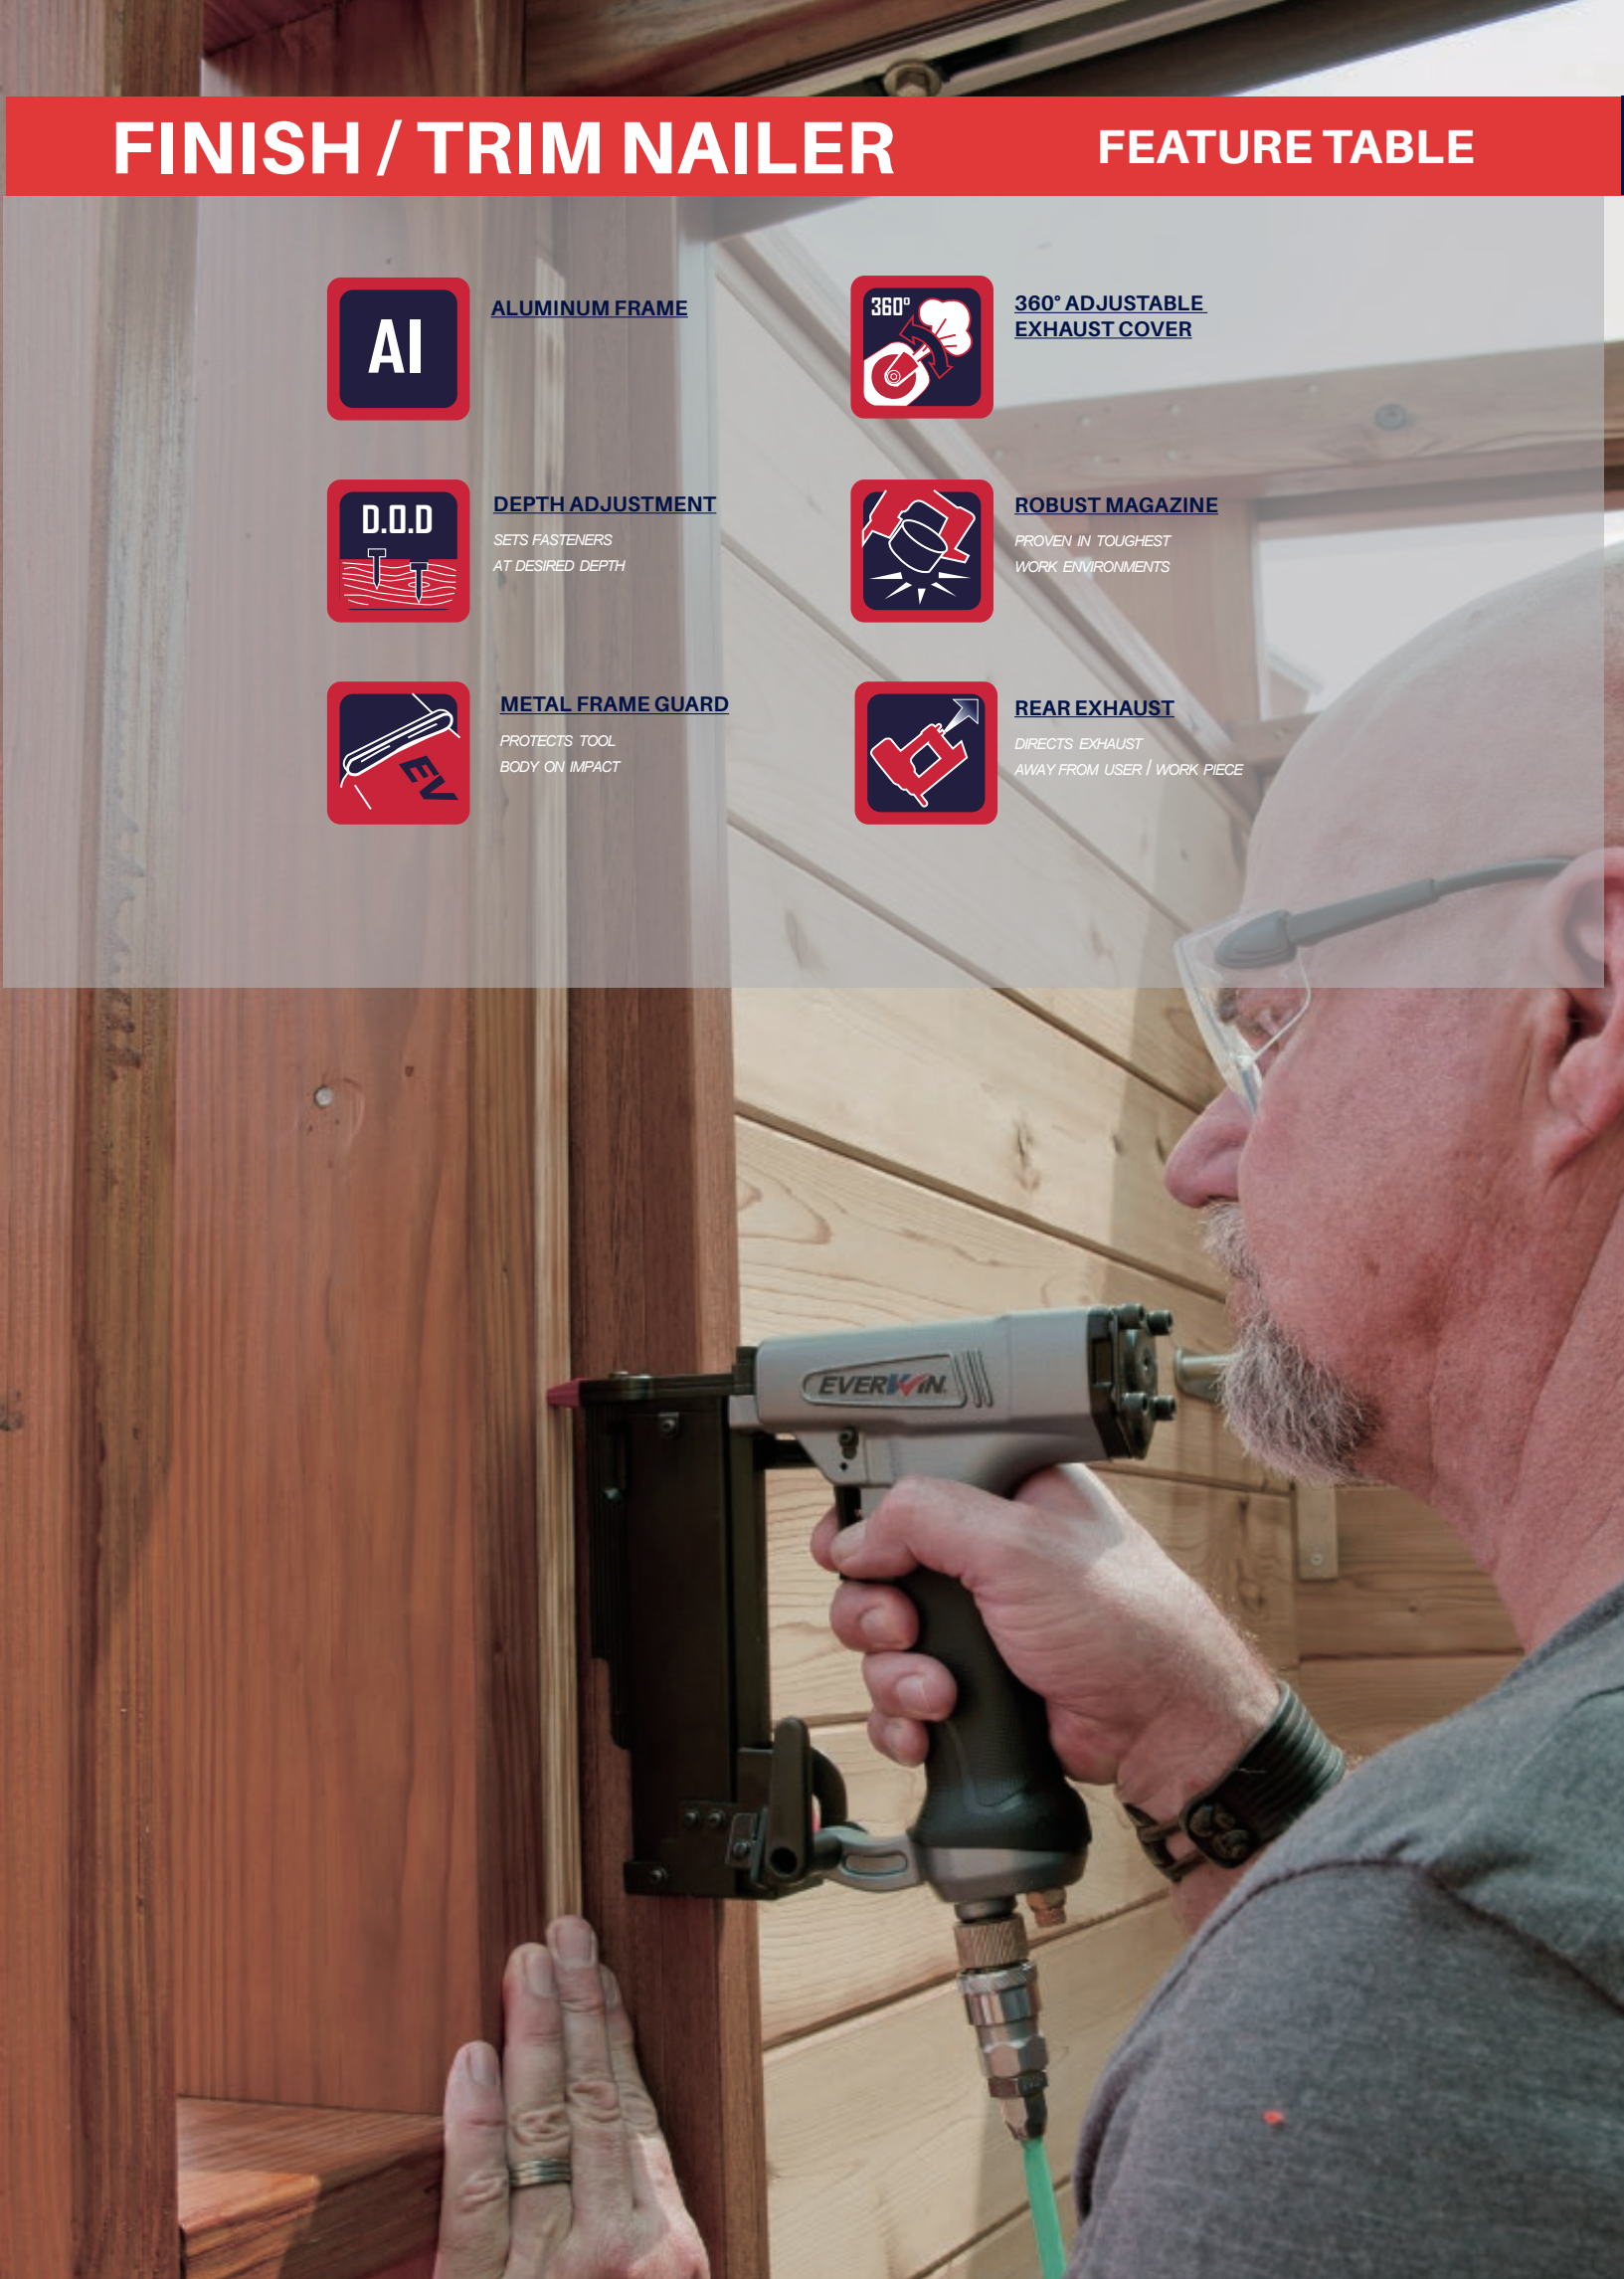


# FN1850

50mm 18 GA. Brad Nailer


- 1 TOOL FREE JAM CLEARANCE
- 2 NAIL INDICATOR AS REMINDER FOR RELOADING
- 3 REAR EXHAUST DESIGN
- 4 PINCH-FREE ERGONOMIC TRIGGER
- 5 NO-MAR PAD INCLUDED

- HYBRID SAFETY ALLOWS PRECISE NAIL PLACEMENT
- ROBUST CONSTRUCTION WITHSTANDS INDUSTRIAL ENVIRONMENT
- TWO TRIGGER OPTIONS AVAILABLE:  
FN1850-ST (Sequential) / FN1850-CT (Contact)
- ALSO AVAILABLE WITH THE FOLLOWING OPTIONS:

Variant Model#	Description
FN1850	Standard tool, no depth of driver adjustment.
FN1850D	Includes all metal, tool free depth adjustment.
FN1850PAL	Machine mount with high speed remote control valve.

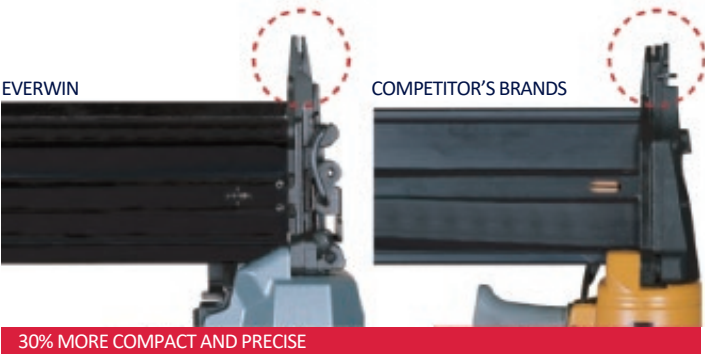

FASTENER SPECIFICATION	
Type	18 Gauge 50mm (2") Brad Nailer
Loading Capacity	100
A	16 ~ 50mm (5/8" ~ 2")
B	1.90 x 1.30mm (0.075" x 0.051")
C	1.25 x 1.00mm (0.049" x 0.039")



TOOL SPECIFICATION	
Weight	1.4 kgs (3.1 lbs)
Height	241mm (9.5")
Width	60mm (2.4")
Length	240mm (9.4")
Operating Pressure	5~7 bar (70~100 psi)
Driving Power in-lbs @100 psi	187 in-lbs
Air Consumption L/cycle @90 psi	0.8 (1.69 cfm)
Applications	Trim Work, Furniture Building, Other Finish Applications




# AFN1565

INDUSTRIAL 65mm 15 GA. 34° Angle Finish Nailer

- 1 360° EXHAUST DEFLECTOR
- 2 TOOL-FREE DEPTH-ADJUSTMENT KNOB
- 3 PATENTED STREAMLINED JAM-CLEARING MECHANISM
- 4 NO-MAR PAD
- 5 360° ROTATABLE BELT HOOK
- 6 IN-LINE 2-STEP LOADING MAGAZINE
- 7 ANGLED NOSE BOLTS BOOST TOOL LONGEVITY
- TWO TRIGGER OPTIONS AVAILABLE:  
AFN1565-ST (Sequential) / AFN1565-CT (Contact)



FASTENER SPECIFICATION	
Type	15 Gauge 65mm(2-1/2") Brad Nails
Loading Capacity	100
A	32~65mm (1-1/4"~2-1/2")
B	3.1mm (0.124")
C	1.80mm (0.070") 1.90 x 1.60mm (0.075" x 0.063")



TOOL SPECIFICATION	
Weight	1.88 kgs (4.1 lbs)
Height	306mm (12.1")
Width	81mm (3.2")
Length	326mm (12.8")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	428 in-lbs
Air Consumption L/cycle @90 psi	1.36 (2.97 cfm)
Applications	Trim Work, Furniture Building, Other Finish Applications

P635


35mm 23 GA. Micro Pinner



- 1 RELOAD INDICATOR
- 2 NO-MAR PAD AND NARROW NOSE
- 3 DOUBLE SAFETY TRIGGER AVAILABLE
- 4 OPTIONAL CONTACT TRIP



FASTENER SPECIFICATION	
Type	23 GA. Headless & Micro-head Pins
Loading Capacity	120
A	13~35mm (1/2"~1-3/8")
B	0.64~0.9mm (0.025"~0.035")
C	0.64mm (0.025")



TOOL SPECIFICATION	
Weight	0.8 kgs (1.8 lbs)
Height	176mm (6.9")
Width	35mm (1.4")
Length	196mm (7.7")
Operating Pressure	5~7.6 bar (70~110 psi)
Driving Power in-lbs @100 psi	95 In-lbs
Air Consumption L/cycle @90 psi	0.3 (0.6 cfm)
Applications	Cabinets, Mirrors, Picture Frames, Finish and Trim

P635B


35mm 23 GA. Micro Pinner



- 1 ERGONOMICALLY ANGLED HANDLE
- 2 REVERSIBLE BELT HOOK HANDLE
- 3 RELOAD INDICATOR
- 4 NO-MAR PAD AND NARROW NOSE
- 5 EASY ACCESS BOLTS & WRENCH FOR JAM CLEARING AND DEPTH ADJUSTMENT
- 6 DOUBLE SAFETY TRIGGER



FASTENER SPECIFICATION	
Type	23 GA. Headless & Micro-head Pins
Loading Capacity	100
A	13~35mm (1/2"~1-3/8")
B	0.64~0.9mm (0.025"~0.035")
C	0.64mm (0.025")



TOOL SPECIFICATION	
Weight	1.0 kgs (2.3 lbs)
Height	196mm (7.7")
Width	46mm (1.8")
Length	201mm (7.9")
Operating Pressure	5~7.6 bar (70~110 psi)
Driving Power in-lbs @100 psi	96 In-lbs
Air Consumption L/cycle @90 psi	0.43 (0.9 cfm)
Applications	Cabinets, Mirrors, Picture Frames, Finish and Trim



## "Made In Taiwan"

For EVERWIN, this is not only a label,  
but also a guarantee of reliability.

We go above and beyond to exceed your expectations  
of quality and of service.

---

## The EVERWIN Promise

Just like how our customers inspire us,  
we want to inspire them back with the EVERWIN promise.  
This promise entails that we help our customers in every way possible.  
In the end, our goal is to let the customers focus on their businesses,  
while we focus on offering top quality tools.



**EVERWIN**

# P650

50mm 23 GA. Micro Pinner




- 1 LAST NAIL LOCK-OUT WITH OVERRIDE SYSTEM
- 2 ERGONOMICALLY ANGLED HANDLE
- 3 REVERSIBLE BELT HOOK
- 4 RELOAD INDICATOR
- 5 NO-MAR PAD AND NARROW NOSE
- 6 EASY ACCESS BOLTS & WRENCH FOR JAM CLEARING AND DEPTH ADJUSTMENT
- 7 DOUBLE SAFETY TRIGGER



## FASTENER SPECIFICATION

Type	23 GA. Headless & Micro-head Pins
Loading Capacity	100
A	13~50mm (1/2"~2")
B	0.64~0.9mm (0.025"~0.035")
C	0.64mm (0.025")




## TOOL SPECIFICATION

Weight	1.2 kgs (2.7 lbs)
Height	226mm (8.9")
Width	47mm (1.8")
Length	200mm (7.9")
Operating Pressure	5~7.6 bar (70~110 psi)
Driving Power in-lbs @100 psi	135 In-lbs
Air Consumption L/cycle @90 psi	0.5 (1.1 cfm)
Applications	Cabinets, Mirrors, Picture Frames, Finish and Trim

# P850

50mm 21 GA. Micro Pinner

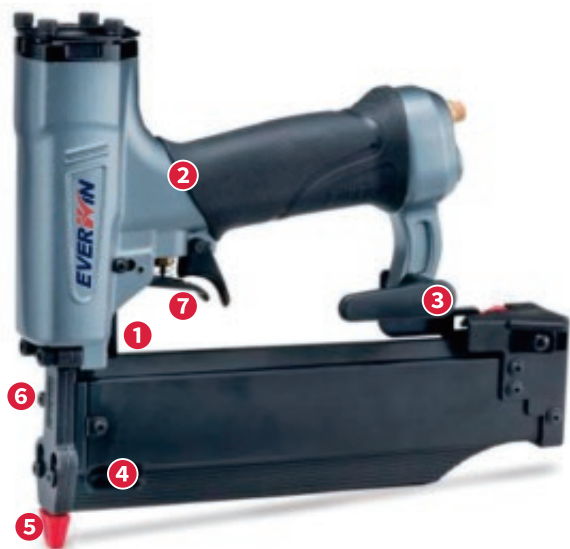


- 1 LAST NAIL LOCK-OUT WITH OVERRIDE SYSTEM
- 2 ERGONOMICALLY ANGLED HANDLE
- 3 REVERSIBLE BELT HOOK
- 4 RELOAD INDICATOR
- 5 NO-MAR PAD AND NARROW NOSE
- 6 EASY ACCESS BOLTS & WRENCH FOR JAM CLEARING AND DEPTH ADJUSTMENT
- 7 DOUBLE SAFETY TRIGGER



## FASTENER SPECIFICATION

Type	21 GA. Headless & Micro-head Pins
Loading Capacity	100
A	16~50mm (5/8"~2")
B	0.84~1.4mm (0.033"~0.055")
C	0.84mm (0.033")



## TOOL SPECIFICATION

Weight	1.4 kgs (3.1 lbs)
Height	226mm (8.9")
Width	47mm (1.8")
Length	260mm (10.2")
Operating Pressure	5~7.6 bar (70~110 psi)
Driving Power in-lbs @100 psi	135 In-lbs
Air Consumption L/cycle @90 psi	0.5 (1.1 cfm)
Applications	Cabinets, Mirrors, Picture Frames, Finish and Trim



# STAPLER

## FEATURE TABLE



### AUTOMATIC TRIGGER

IDEAL FOR HIGH  
VOLUME APPLICATION



### ALUMINUM FRAME



### JAM-PROOF TECHNOLOGY

MINIMIZES DOWNTIME



### REMOTE CONTROL VALVE

SIGNAL-FED ACTUATION



### MAGNESIUM FRAME



### 360° ADJUSTABLE EXHAUST COVER



### RAPID FIRE TRIGGER

UP TO 15 SHOTS / SECOND



### RUBBER BODY PAD

PROTECTS WORK  
PIECE SURFACE



### REAR EXHAUST

DIRECTS EXHAUST AWAY  
FROM USER / WORK PIECE



### DEPTH ADJUSTMENT

SETS FASTENERS  
AT DESIRED DEPTH



### METAL FRAME GUARD

PROTECTS TOOL  
BODY ON IMPACT



# FS9040

40mm 18 GA. 90 Series Stapler

# FS9240

40mm 18 GA. 92 Series Stapler




- 1 TOOL FREE JAM CLEARANCE
- 2 REAR EXHAUST DESIGN
- 3 PINCH-FREE ERGONOMIC TRIGGER
- 4 WRAPAROUND SAFETY BOOSTS VERSATILITY
- 5 ROBUST CONSTRUCTION WITHSTANDS INDUSTRIAL
- ALUMINUM EXTRUDED BOTTOM LOAD MAGAZINE FOR
- EASE OF JAM CLEARANCE WITH SHOCK-ABSORBENT BACK COVER
- TWO TRIGGER OPTIONS AVAILABLE:  
FS9040-ST (Sequential) / FS9040-CT (Contact)



## FASTENER SPECIFICATION

Type	18 Gauge 90 Series / Bostitch SX Staples
	100
	16~40mm (5/8"~1-9/16")
	5.8mm (1/4")
	1.25 x 1.00mm (0.049" x 0.039")



## TOOL SPECIFICATION

Weight	1.6 kgs (3.5 lbs)
Height	235mm (9.3")
Width	60mm (2.4")
Length	240mm (9.4")
Operating Pressure	5~7 bar (70~100 psi)
Driving Power in-lbs @100 psi	188 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.69 cfm)
Applications	Trim Work, Furniture Building, Other Finish Applications




- 1 TOOL FREE JAM CLEARANCE
- 2 REAR EXHAUST DESIGN
- 3 PINCH-FREE ERGONOMIC TRIGGER
- 4 ONE-PIECE CONTACT TRIP AND NARROW STAPLE GUIDE DESIGN
- 5 FOR TIGHT PLACEMENT
- ROBUST CONSTRUCTION WITHSTANDS INDUSTRIAL
- ALUMINUM EXTRUDED BOTTOM LOAD MAGAZINE FOR
- EASE OF JAM CLEARANCE WITH SHOCK-ABSORBENT BACK COVER
- TWO TRIGGER OPTIONS AVAILABLE:  
FS9240-ST (Sequential) / FS9240-CT (Contact)



## FASTENER SPECIFICATION

Type	18 Gauge 92 Series Narrow Crown Staples
	100
	16~40mm (5/8"~1-9/16")
	8.6mm (5/16")
	1.25 x 1.00mm (0.049" x 0.039")

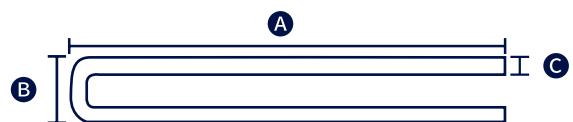

## TOOL SPECIFICATION


Weight	1.4 kgs (3.1 lbs)
Height	235mm (9.3")
Width	60mm (2.4")
Length	259mm (10.2")
Operating Pressure	5~7 bar (70~100 psi)
Driving Power in-lbs @100 psi	188 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.69 cfm)
Applications	Trim Work, Furniture Building, Other Finish Applications




# SN65Q

65mm 15 GA. Q Series Stapler

- 1 360° ADJUSTABLE EXHAUST COVER
  - 2 HEAVY DUTY GRAVITY ALUMINUM CASTED ENGINE WITH RUBBER HANDLE GRIP
  - 3 TOOL FREE JAM CLEARANCE
  - 4 INDUSTRIAL GRADE BOLTED DEPTH ADJUSTMENT
  - 5 ANGLED NOSE BOLTS
- 567 IN-LBS OF INDUSTRY LEADING POWER
  - HIGH SPEED OPERATION, 10 CYCLES/SECOND
  - TWO TRIGGER OPTIONS AVAILABLE:  
SN65Q-ST (Sequential) / SN65Q-CT (Contact)



FASTENER SPECIFICATION	
Type	15 Ga. Senco Q Staples
Loading Capacity	130
A	32~65mm (1-1/4"~2-1/2")
B	11.3mm (0.44")
C	1.90 x 1.70mm (0.075" x 0.064")



TOOL SPECIFICATION	
Weight	2.9 kgs (6.4 lbs)
Height	305mm (12.0")
Width	92mm (3.6")
Length	365mm (14.4")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	567 In-lbs
Air Consumption L/cycle @90 psi	3.08 (6.5 cfm)

Applications

Pallet, Drums and Boxes,  
Furniture Frames,  
General Construction, Framing,  
Sheathing

# SN50S5

50mm 16/17 GA. Medium Crown Stapler

# SN50S4

50mm 16 GA. Medium Crown Stapler


INDUSTRY'S  
TOUGHEST



- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- 4 AVAILABLE WITH SEQUENTIAL & TRIGGER FIRE
- 397 IN-LBS OF INDUSTRY LEADING POWER
- FULL AUTOMATIC VERSION AVAILABLE (SN50S5A)



FASTENER SPECIFICATION	
Type	16 & 17 GA. Bostitch BCS5 / SENCO N / BeA 155
Loading Capacity	160~180
A	25~50mm (1"~2")
B	11.1mm (7/16")
C	1.6 x1.4mm (0.062"x0.055") 1.45 x1.3mm (0.057"x0.051")




TOOL SPECIFICATION	
Weight	2.3 kgs (5.1 lbs)
Height	272mm (10.7")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	397 In-lbs
Air Consumption L/cycle @90 psi	0.9 (1.9 cfm)
Applications	Furniture Frames, General Construction



- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- 4 AVAILABLE WITH SEQUENTIAL & TRIGGER FIRE
- 397 IN-LBS OF INDUSTRY LEADING POWER
- FULL AUTOMATIC VERSION AVAILABLE (SN50S4A)



FASTENER SPECIFICATION	
Type	16 GA. Bostitch BCS4 / Atro 16 NC
Loading Capacity	160
A	25~50mm (1"~2")
B	12.5mm (1/2")
C	1.6x1.4mm (0.062"x0.055")



TOOL SPECIFICATION	
Weight	2.3 kgs (5.1 lbs)
Height	272mm (10.7")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	397 In-lbs
Air Consumption L/cycle @90 psi	0.9 (1.9 cfm)
Applications	Furniture Frames, General Construction



# SN50GSI

50mm 16 GA. Medium Crown Stapler

[INDUSTRY'S  
TOUGHEST]




- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- 4 AVAILABLE WITH SEQUENTIAL & TRIGGER FIRE
- 397 IN-LBS OF INDUSTRY LEADING POWER
- FULL AUTOMATIC VERSION AVAILABLE (SN50GSIA)



### FASTENER SPECIFICATION

Type	16 GA. Paslode GSI / Haubold KG 700
Loading Capacity	160
A	25~50mm (1"~2")
B	11.2mm (7/16")
C	1.6x1.4mm (0.062"x0.055")



### TOOL SPECIFICATION

Weight	2.3 kgs (5.1 lbs)
Height	272mm (10.7")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	397 In-lbs
Air Consumption L/cycle @90 psi	0.9 (1.9 cfm)
Applications	Furniture Frames, General Construction





# Why EVERWIN?

With increasing pressure for faster and more precise production across all industries, the need for efficient tooling is greater than ever.

---

Backed by vast experience in tool development and quality control, EVERWIN is one of the world's leading industrial nailer and stapler manufacturers.





# SN50GS-16

50mm 16 GA. Medium Crown Stapler




- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- 4 AVAILABLE WITH SEQUENTIAL & TRIGGER FIRE
- 397 IN-LBS OF INDUSTRY LEADING POWER
- FULL AUTOMATIC VERSION AVAILABLE (SN50S5A)



## FASTENER SPECIFICATION

Type	16 GA. Paslode GS-16
Loading Capacity	160
A	25~50mm (1"~2")
B	12.8mm (1/2")
C	1.60x1.40mm (0.062"x0.055")



## TOOL SPECIFICATION

Weight	2.3 kgs (5.1 lbs)
Height	272mm (10.7")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	397 In-lbs
Air Consumption L/cycle @90 psi	0.9 (1.9 cfm)
Applications	Pallet, Drums and Boxes, Furniture Frames, General Construction, Vinyl Siding, Framing, Sheathing

# SN50GS-14

50mm 14 GA. Medium Crown Stapler




- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- 4 AVAILABLE WITH SEQUENTIAL & TRIGGER FIRE
- 397 IN-LBS OF INDUSTRY LEADING POWER
- FULL AUTOMATIC VERSION AVAILABLE (SN50S5A)



## FASTENER SPECIFICATION

Type	14 GA. Paslode GS-14
Loading Capacity	120
A	25~50mm (1"~2")
B	13.7mm (1/2")
C	2.1x1.8mm (0.083"x0.071")



## TOOL SPECIFICATION

Weight	2.3 kgs (5.1 lbs)
Height	272mm (10.7")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	397 In-lbs
Air Consumption L/cycle @90 psi	0.9 (1.9 cfm)
Applications	Furniture Frames, General Construction

# SN40S2

40mm 16 GA. Wide Crown Stapler

# SN40P

40mm 16 GA. Wide Crown Stapler

[ INDUSTRY'S  
TOUGHEST ]




- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- ALL METAL HOUSING AND STRUCTURE
- WORLD'S TOUGHEST HEAVY-WIRE STAPLER
- FULL AUTOMATIC VERSION AVAILABLE (SN40S2A)



## FASTENER SPECIFICATION

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	25.4mm (1")
C	1.6x1.4mm (0.062"x0.055")



## TOOL SPECIFICATION

Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Furniture Frames, General Construction




- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- ALL METAL HOUSING AND STRUCTURE
- WORLD'S TOUGHEST HEAVY-WIRE STAPLER
- FULL AUTOMATIC VERSION AVAILABLE (SN40SPA)



## FASTENER SPECIFICATION

Type	16 GA. Senco P / Prebena WS
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	26.4mm (1-1/16")
C	1.6x1.4mm (0.062"x0.055")



## TOOL SPECIFICATION

Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Furniture Frames, General Construction



SN40GSW

40mm 16 GA. Wide Crown Stapler

SN40P-R

40mm 16 GA. Roofing Stapler


INDUSTRY'S  
TOUGHEST



- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- ALL METAL HOUSING AND STRUCTURE
- WORLD'S TOUGHEST HEAVY-WIRE STAPLER
- FULL AUTOMATIC VERSION AVAILABLE (SN40GSWA)



FASTENER SPECIFICATION	
Type	16 GA. Paslode GSW / Prebena WT
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	23.8mm (15/16")
C	1.6x1.4mm (0.062"x0.055")




TOOL SPECIFICATION	
Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Furniture Frames, General Construction



- 1 BUILT-IN "SHINGLE GUIDE", ROOFING NOSE
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- ALL METAL HOUSING AND STRUCTURE
- ACCELERATED DROP-TEST PROVEN



FASTENER SPECIFICATION	
Type	16 GA. Senco P / Prebena WS
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	26.4mm (1-1/16")
C	1.6x1.4mm (0.062"x0.055")

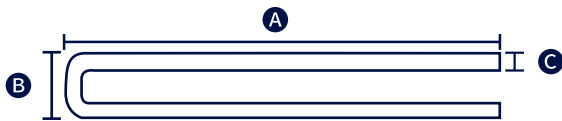

TOOL SPECIFICATION	
Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Shingle Roofing, House wrap/ vapor barrier, Sheathing

SN40S2-R

40mm 16 GA. Roofing Stapler

SN40GSW-R

40mm 16 GA. Roofing Stapler


INDUSTRY'S  
TOUGHEST



- 1 BUILT-IN "SHINGLE GUIDE", ROOFING NOSE
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- ALL METAL HOUSING AND STRUCTURE
- ACCELERATED DROP-TEST PROVEN



FASTENER SPECIFICATION	
Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	25.4mm (1")
C	1.6x1.4mm (0.062"x0.055")




TOOL SPECIFICATION	
Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Shingle Roofing, House wrap/ vapor barrier, Sheathing



- 1 BUILT-IN "SHINGLE GUIDE", ROOFING NOSE
- 2 JAM-PROOF TECHNOLOGY
- 3 INVESTMENT-CASTED EXHAUST COVER AND END CAP
- ALL METAL HOUSING AND STRUCTURE
- ACCELERATED DROP-TEST PROVEN



FASTENER SPECIFICATION	
Type	16 GA. Paslode GSW / Prebena WT
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	23.8mm (15/16")
C	1.6x1.4mm (0.062"x0.055")



TOOL SPECIFICATION	
Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Shingle Roofing, House wrap/ vapor barrier, Sheathing



- 1 DEPTH ADJUST DEVICE FRONT PROTECTION PLATE
- 2 STEEL, ADJUSTABLE EXHAUST
- 3 MAGNESIUM ERGONOMIC FRAME OVER-MOLDED HANDLE GRIP
- 4 2X or 3X EXTENDED MAGAZINE BOOSTED CAPACITY OF 360+ STAPLES PER LOAD
- 5 REAR- JAM CLEARANCE INVESTMENT-CASTED PROTECTOR
- IDEAL FOR MACHINE-MOUNTING OR HANDHELD OPERATION
- HIGH SPEED OPERATION, 15 CYCLES/SECOND

**[ MORE LOADING  
CAPACITY,  
LESS DOWNTIME ]**



AVAILABLE VARIATIONS	
Machine-Mounted Version	Equipped with RCVA1 or RCVA2 remote control trigger valve
Long Magazine KIT	Furnished with magazine assembly only, model dependent
Hand-Held Version	Equipped with standard sequential or contact fire trigger
Full-Auto Version	Equipped with full-automatic cap assembly, shoots up to 20 staples/sec

FASTENER SPECIFICATION	
TOOL MODEL	COMPATIBLE STAPLES
SN50S5LM	16 & 17 GA. Bostitch BCS5 / SENCO N / BeA 155
SN50S4LM	16 GA. Bostitch BCS4 / Atro 16 NC
SN402PLM	16 GA. Senco P / Prebena WS
SN50S53MAG	16 & 17 GA. Bostitch BCS5 / SENCO N / BeA 155

TOOL SPECIFICATION	
Weight	LM: 2.7 kgs (5.9 lbs) 3MAG: 3.1 kgs (6.8 lbs)
Height	SN40: 251mm (9.9") SN50: 272mm (10.7")
Width	94mm (3.7")
Length	LM: 570mm (22.4") 3MAG: 777mm (30.6")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	SN50: 397in-lbs / SN40: 369in-lbs
Air Consumption L/cycle @90 psi	SN50: 0.9 (1.9 cfm) SN40: 0.8 (1.7 cfm)
Applications	Furniture Frames, Machine Automation

# SN50 / 40 AUTO CAP

Automatic Firing Cap for SN40 / SN50 series staplers

- 1

DEPTH ADJUST DEVICE, FRONT PROTECTION PLATE
- 2

STEEL, ADJUSTABLE EXHAUST HAMMER EXHAUST
- 3

MAGNESIUM ERGONOMIC FRAME OVER-MOLDED HANDLE GRIP
- 4

MAGNESIUM CASTED ONE-PIECE CONNECTOR
- 5

REAR- JAM CLEARANCE INVESTMENT-CASTED PROTECTOR
- PATENTED AUTO-CAP™ PROVIDES CONSISTENT AUTOMATIC CYCLE RATES
- CONVERT A REGULAR FIRE MODE TOOL TO AN AUTOMATIC TOOL SIMPLY BY SWITCHING THE CAP
- USE LARGE AIR PLUG WITH 5MM (0.2") PORT AND 3/8" HOSE



### MANUAL SPEED DIAL

Min Speed: 2 cycle / sec

Max Speed: 20 cycles / sec



GLIDING GUIDE  
Optional for Ease of Operation



CONVERSION KIT NUMBERS  
104465 for SN50 series  
104466 for SN40 series  
Exhaust cover not included

FIRING SPEED  
TAILORED TO  
YOUR NEEDS



FASTENER SPECIFICATION	
TOOL MODEL	COMPATIBLE STAPLES
SN50S5A	Senco N/ Bostitch BCS5/ BeA155
SN50S4A	Bostitch BCS4/ Atro 16NC/ Prebena S
SN50GSIA	Paslode GSI 16/ Haubold KG700
SN50GS-16A	Paslode GS 16
SN40S2A	Bostitch BCS2/ Atro 18NC/ Prebena WC
SN40PA	Senco P/ JK 784/ Prebena WS
SN40GSWA	Paslode GSW 16/ Prebena WT
SN40GSW-14A	Paslode GSW 14
SN50GS-14A	Paslode GSW 16

TOOL SPECIFICATION	
Weight:	SN50: 2.5 kgs (5.5 lbs) SN40: 2.3 kgs (5.1 lbs)
Height:	SN50: 272mm (10.7") SN40: 251mm (9.9")
Width:	94mm (3.7")
Length:	363mm (14.3")
Operating pressure:	70 to 120 PSI (5-8 bars)
Use 5mm (0.2") air plug port and 10mm (3/8") air hose ID	
Air Consumption	SN50 : 0.9L/sec (1.9 cfm)
L/cycle @90 psi	SN40 : 0.8L/sec (1.7 cfm)
Firing mode:	Contact Automatic Fire
Applications:	Manufactured Housing, Framing Furniture Frames, Sheathing


# SN40GSW-14

40mm 14 GA. Wide Crown Stapler




**14**  
GAUGE

- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 AVAILABLE WITH SEQUENTIAL & TRIGGER FIRE
- ALL METAL HOUSING AND STRUCTURE
- WORLD'S TOUGHEST HEAVY-WIRE STAPLER
- FULL AUTOMATIC VERSION AVAILABLE (SN40GSW-14A)



## FASTENER SPECIFICATION

Type	14 GA. Paslode GSW14
Loading Capacity	120
A	19~40mm (3/4"~1-9/16")
B	24.7mm (1")
C	2.1x1.8mm (0.083"x0.071")



## TOOL SPECIFICATION

Weight	2.5 kgs (5.5 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	397 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Shingle Roofing, House wrap/ vapor barrier, Sheating



# Destructive Testing

Prior to its launch, each new EVERWIN tool undergoes rigorous test programs, stimulating the harshest conditions a tool may be put under. In between these tests, a tool is beaten up and reinforced repeatedly until it achieves durability beyond market's expectations.

---

Every single EVERWIN tool is cycled through various fastener types prior to dispatch, ensuring consistent performance on any EVERWIN tool placed in a user's hands.



# SN402P

50mm 16 GA. Lathing Stapler

# SN402S2

50mm 16 GA. Lathing Stapler

## [ LATHING DREAM TOOL ]



- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 AVAILABLE IN BOTH SEQUENTIAL & TRIGGER FIRE MODES
- 385 IN-LBS OF INDUSTRY LEADING POWER
- WORLD'S TOUGHEST LATHING STAPLER
- FULL AUTOMATIC VERSION AVAILABLE (SN402PA)

- 1 EXCLUSIVE REAR JAM-CLEARANCE DESIGN
- 2 JAM-PROOF TECHNOLOGY
- 3 AVAILABLE IN BOTH SEQUENTIAL & TRIGGER FIRE MODES
- 385 IN-LBS OF INDUSTRY LEADING POWER
- WORLD'S TOUGHEST LATHING STAPLER
- FULL AUTOMATIC VERSION AVAILABLE (SN402S2A)





### FASTENER SPECIFICATION

Type	16 GA. Senco P / Prebena WS
Loading Capacity	160
A	25~50mm (1"~2")
B	26.4mm (1-1/16")
C	1.6x1.4mm (0.062"x0.055")

### FASTENER SPECIFICATION

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	25~50mm (1"~2")
B	25.4mm (1")
C	1.6x1.4mm (0.062"x0.055")

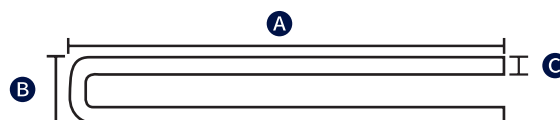

### TOOL SPECIFICATION

Weight	2.3 kgs (5.0 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Wire Lathing, Furniture Framing, Foam Insulation

### TOOL SPECIFICATION

Weight	2.3 kgs (5.0 lbs)
Height	251mm (9.9")
Width	94mm (3.7")
Length	363mm (14.3")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	369 In-lbs
Air Consumption L/cycle @90 psi	0.8 (1.7 cfm)
Applications	Wire Lathing, Furniture Framing, Foam Insulation




- 1 ONE-PIECE ALUMINUM CYLINDER DESIGN
- 2 COMPACT ENGINE BOOSTS MANEUVERABILITY
- 3 PNEUMATIC POWER ADJUSTMENT

- ALL METAL HOUSING AND STRUCTURE
- HIGH SPEED OPERATION, 15~20 CYCLES/SECOND
- FULL AUTOMATIC VERSION AVAILABLE (SN412S2A)

[ LATHING  
DREAM TOOL ]



FASTENER SPECIFICATION	
Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	25~50mm (3/4"~2")
B	25.4mm (1")
C	1.6x1.4mm (0.062"x0.055")



TOOL SPECIFICATION	
Weight	2.3 kgs (5.0 lbs)
Height	225mm (8.9")
Width	64mm (2.5")
Length	354mm (13.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	176-237 In-lbs
Air Consumption L/cycle @90 psi	0.6 (1.25cfm)
Applications	Wire Lathing, Furniture Framing, Foam Insulation



# SN41S4

40mm 16 GA. Medium Crown Stapler

# SN41S5

40mm 16/17 GA. Medium Crown Stapler

**DRIVING  
POWER  
ADJUSTABLE**



- 1 ONE-PIECE ALUMINUM CYLINDER DESIGN
- 2 COMPACT ENGINE BOOSTS MANEUVERABILITY
- 3 PNEUMATIC POWER ADJUSTMENT
- ALL METAL HOUSING AND STRUCTURE
- HIGH SPEED OPERATION, 15~20 CYCLES/SECOND
- FULL AUTOMATIC VERSION AVAILABLE (SN41S4A)




- 1 ONE-PIECE ALUMINUM CYLINDER DESIGN
- 2 COMPACT ENGINE BOOSTS MANEUVERABILITY
- 3 PNEUMATIC POWER ADJUSTMENT
- ALL METAL HOUSING AND STRUCTURE
- HIGH SPEED OPERATION, 15~20 CYCLES/SECOND
- FULL AUTOMATIC VERSION AVAILABLE (SN41S5A)



## FASTENER SPECIFICATION

Type	16 GA. Bostitch BCS4 / Atro 16 NC
Loading Capacity	160
A	19~40mm (3/4"~1-9/16")
B	12.5mm (1/2")
C	1.6x1.4mm (0.062"x0.055")




## TOOL SPECIFICATION

Weight	2.0 kgs (4.4 lbs)
Height	225mm (8.9")
Width	64mm (2.5")
Length	355mm (14.0")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	176-237 In-lbs
Air Consumption L/cycle @90 psi	0.6 (1.25cfm)
Applications	Pallet, Furniture Frame, Vinyl Siding, Framing, Sheathing



## FASTENER SPECIFICATION

Type	16&17 GA. Bostitch BCS5 / SENCO N / BeA 155
Loading Capacity	160~180
A	19~40mm (3/4"~1-1/2")
B	10.6~11.1mm (7/16")
C	1.60 x 1.4mm (0.062" x 0.055") 1.45 x 1.3mm (0.057" x 0.051")



## TOOL SPECIFICATION

Weight	2.0 kgs (4.4 lbs)
Height	225mm (8.9")
Width	64mm (2.5")
Length	355mm (14.0")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	176-237 In-lbs
Air Consumption L/cycle @90 psi	0.6 (1.25cfm)
Applications	Pallet, Furniture Frame, Vinyl Siding, Framing, Sheathing

# SN41S2-R

38mm 16 GA. Roofing Stapler

# SN41S2

38mm 16 GA. Wide Crown Stapler

**DRIVING  
POWER  
ADJUSTABLE**




- 1 BUILT-IN "SHINGLE GUIDE"
- 2 ONE-PIECE ALUMINUM CYLINDER DESIGN
- 3 COMPACT ENGINE BOOSTS MANEUVERABILITY
- 4 PNEUMATIC POWER ADJUSTMENT
- HIGH SPEED OPERATION, 15~20 CYCLES/SECOND
- ALL METAL HOUSING AND STRUCTURE



## FASTENER SPECIFICATION

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	19~38mm (3/4"~1-1/2")
B	25.4mm (1")
C	1.6x1.4mm (0.062"x0.055")



## TOOL SPECIFICATION

Weight	2.4 kgs (5.3 lbs)
Height	225mm (8.9")
Width	67mm (2.6")
Length	354mm (13.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	176-237 In-lbs
Air Consumption L/cycle @90 psi	0.6 (1.25cfm)
Applications	Shingle Roofing, House wrap/ vapor barrier, Sheathing




- 1 ONE-PIECE ALUMINUM CYLINDER DESIGN
- 2 COMPACT ENGINE BOOSTS MANEUVERABILITY
- 3 PNEUMATIC POWER ADJUSTMENT
- ALL METAL HOUSING AND STRUCTURE
- HIGH SPEED OPERATION, 15~20 CYCLES/SECOND
- FULL AUTOMATIC VERSION AVAILABLE (SN41S2A)



## FASTENER SPECIFICATION

Type	16 GA. Bostitch BCS2 / Prebena WC
Loading Capacity	160
A	19~38mm (3/4"~1-1/2")
B	25.4mm (1")
C	1.6x1.4mm (0.062"x0.055")



## TOOL SPECIFICATION

Weight	2.3 kgs (5.0 lbs)
Height	225mm (8.9")
Width	64mm (2.5")
Length	354mm (13.9")
Operating Pressure	5~8 bar (70~120 psi)
Driving Power in-lbs @100 psi	176-237 In-lbs
Air Consumption L/cycle @90 psi	0.6 (1.25cfm)
Applications	Furniture Framing, Wire Lathe, Foam Insulation Board





# Complete Mattress Fastening Solution

Pocket Springs  
Border Wire  
Wood Foundations

Boxspring Frame Assembly  
Spring Grid  
**YOU NEED IT, WE GOT IT.**



P88SJ


Industrial Plier Stapler



- 1 JAM-PROOF TECHNOLOGY
- 2 ROBUST GRAVITY CASTED FRAME
- 3 DETACHABLE MAGAZINE FOR QUICK JAM CLEARING
- 4 DOUBLE TRIGGER SAFETY SWITCH
- HIGH SPEED OPERATION
- LEADING CLINCH YIELD RATE



FASTENER SPECIFICATION	
Type	20 GA. Atro 88
Loading Capacity	200
A	12~25mm (1/2"~1")
B	13.1mm (1/2")
C	1.2x 0.5mm (0.047"x0.020")



TOOL SPECIFICATION	
Weight	2.1 kgs (4.6 lbs)
Height	300mm (11.8")
Width	70mm (2.7")
Length	350mm (13.8")
Operating Pressure	5-6 bar (70-85 psi)
Air Consumption L/cycle @90 psi	1.1 (2.3cfm)
Applications	Choir Mats, Car Seats, Mattress Assembly

P110SJ


Industrial Plier Stapler



- 1 JAM-PROOF TECHNOLOGY
- 2 ROBUST GRAVITY CASTED FRAME
- 3 DETACHABLE MAGAZINE FOR QUICK JAM CLEARING
- 4 DOUBLE TRIGGER SAFETY SWITCH
- HIGH SPEED OPERATION
- LEADING CLINCH YIELD RATE



FASTENER SPECIFICATION	
Type	18 GA. Atro 110
Loading Capacity	200
A	12~25mm (1/2"~1")
B	13.1mm (1/2")
C	1.6x0.6mm (0.062"x0.023")



TOOL SPECIFICATION	
Weight	2.1 kgs (4.6 lbs)
Height	300mm (11.8")
Width	70mm (2.7")
Length	350mm (13.8")
Operating Pressure	5-6 bar (70-85 psi)
Air Consumption L/cycle @90 psi	1.1 (2.3cfm)
Applications	Choir Mats, Car Seats, Mattress Assembly

# ECAR-D

Mattress Spring Stapler


- 1 REINFORCED OVERALL STRUCTURE:  
30+ TIMES MORE DURABLE THAN MARKET COMPETITION
- 2 ONE-PIECE GRAVITY-CASTED MAGAZINE
- 3 EXTENDED EASY-ACCESS TRIGGER
- 4 ERGONOMIC "SLIP-FREE" HANDLE GRIP
- ALL METAL CONSTRUCTION
- EQUIPPED TO SHOOT 19mm OR 25mm STAPLES

[ 2 STAPLES  
PER SHOT ]



## FASTENER SPECIFICATION

Type	16 GA. Vertex H40446 / Bostitch BCS31P
Loading Capacity	100
A	19 or 25mm (3/4" or 1")
B	9.5mm (3/8")
C	1.60 x 1.40mm (0.062" x 0.055")



## TOOL SPECIFICATION

Weight	3.2 kgs (7 lbs)
Height	895mm (35.24")
Width	55.4mm (2.18")
Length	463mm (18.23")
Operating Pressure	5~7 bar (70~100 psi)
Air Consumption L/cycle @90 psi	0.6 (1.27cfm)
Applications	Attaching springs to box frame, Stapling for Hard to reach spots

# ECAR-S

Mattress Spring Stapler


- 1 REINFORCED OVERALL STRUCTURE:  
30+ TIMES MORE DURABLE THAN MARKET COMPETITION
- 2 ONE-PIECE GRAVITY-CASTED MAGAZINE
- 3 EXTENDED EASY-ACCESS TRIGGER
- 4 ERGONOMIC "SLIP-FREE" HANDLE GRIP
- ALL METAL CONSTRUCTION
- EQUIPPED TO SHOOT 19mm OR 25mm STAPLES

[ 1 STAPLE  
PER SHOT ]



## FASTENER SPECIFICATION

Type	16 GA. Vertex H40446 / Bostitch BCS31P
Loading Capacity	100
A	19 or 25mm (3/4" or 1")
B	9.5mm (3/8")
C	1.60 x 1.40mm (0.062" x 0.055")



## TOOL SPECIFICATION

Weight	3.2 kgs (7 lbs)
Height	895mm (35.24")
Width	55.4mm (2.18")
Length	463mm (18.23")
Operating Pressure	5~7 bar (70~100 psi)
Air Consumption L/cycle @90 psi	0.6 (1.27cfm)
Applications	Attaching springs to box frame, Stapling for Hard to reach spots

- 1 REAR ADJUSTABLE DIRECTIONAL EXHAUST
- 2 DURABLE DRIVER/BUMPER PROVIDES RELIABILITY
- 3 2" (50mm) EXTRA LONG NOSE VERSION AVAILABLE
- 4 ONE-HAND MANUAL REAR LATCH

- 5 ROBUST METAL MAGAZINE
- 6 FAST, SENSITIVE TRIGGER
- OPTIONAL SAFETY DOUBLE TRIGGER
- RAPID CYCLING ENGINE



**LN SERIES**  
Single Fire, Long Nose



**US SERIES**  
Single Fire, Short Nose



#### FASTENER SPECIFICATION

Loading Capacity	100~180
Staple Length	5~16mm (3/16"~5/8")
Expect US1013F(LN) & US1013J(LN): 5~13mm(3/16"~1/2") US8025: 5~25mm(3/16"~1")	



#### TOOL SPECIFICATION

Weight	0.9 kgs (2.0 bls) US8025 : 1.2 kgs (2.6 bls)
Height	Short Nose: 140mm (5.5") Long Nose: 197mm (7.8") US8025 : 180mm (2.2")
Width	38mm (1.5") US8025 : 55mm (7.1")
Length	216mm (8.5") US8025 : 215mm (8.5")
Operating Pressure	5~6.9 bar (70~100 psi)
Driving Power in-lbs @100 psi	51
Air Consumption L/cycle @90 psi	0.3 (0.64 cfm)
Applications	Furniture Upholstery, Automotive Vinyl, Trim

Model Number	A	B	Capacity	Wire Gauge
USSJK16	4.1mm (5/32")	0.60 x 0.74mm (0.024" x 0.030")	150	22 GA. Atro SJK
US9716	4.5mm (3/16")	0.65 x 0.95mm (0.026" x 0.037")	100	21 GA. BeA 97 / Senco W
US5416 / US5416LN	4.7mm (3/16")	0.50 x 1.25 mm (0.020 x 0.049")	100	20 GA. Duo-Fast 54 / Senco E
USSNCW16 / USSNCW16LN	4.8mm (3/16")	0.69 x 0.90 mm (0.027" x 0.035")	100	21 GA. Senco W
USSNCA16 / USSNCA16LN	4.85mm (3/16")	0.60 x 0.74mm (0.024" x 0.030")	150	22 GA. Senco A / Prebena U
US416J / US416JLN	5.25mm (7/32")	0.56 x 1.16mm (0.022" x 0.045")	100	20 GA. Duo-Fast 63
US9916	5.4mm (7/32")	0.59 x 0.98mm (0.021" x 0.040")	100	21 GA. Atro 99 / Prebena ED
US7116 / US7116LN	9.1mm (3/8")	0.60 x 0.75mm (0.024" x 0.030")	180	22 GA. 71 Series / Senco C
USSNCG16 / USSNCG16LN	9.5mm (3/8")	0.60 x 1.30mm (0.024" x 0.051")	100	20 GA. Senco G
USA1116 / USA1116LN	10.8mm (7/16")	0.50 x 1.22mm (0.020" x 0.048")	100	20 GA. Fasco A11 / Arrow T50
US1013F / US1013FLN	11.2mm (7/16")	0.50 x 0.70mm (0.020" x 0.028")	150	23 GA. MAX 10F (1000F)
US1013J / US1013JLN	11.2mm (7/16")	0.60 x 1.20mm (0.024" x 0.047")	150	20 GA. MAX 10J (1000J)
US8416 / US8416LN	12.3mm (1/2")	0.55 x 1.00mm (0.022" x 0.039")	100	21 GA. Bostitch SBNK / Fasco 84
US6416 / US6416LN	12.45mm (1/2")	0.51 x 0.73mm (0.024" x 0.030")	150	22 GA. Atro 6 / BeA 64
US50(95)16 / US50(95)16LN	12.55mm (1/2")	0.50 x 1.25mm (0.020" x 0.049")	100	20 GA. Duo-Fast 50 / BeA 95
US8016 / US8016LN	12.8mm (1/2")	0.63 x 0.90mm (0.025" x 0.036")	150	21 GA. 80 Series / Senco AT
USSNCF16 / USSNCF16LN	12.8mm (1/2")	0.50 x 1.25mm (0.020" x 0.049")	100	20 GA. Senco F / Prebena P
US8025	12.8mm (1/2")	0.63 x 0.90mm (0.025" x 0.036")	150	21 GA. 80 Series / Senco AT





- ① REAR ADJUSTABLE DIRECTIONAL EXHAUST
- ② DURABLE DRIVER/BUMPER PROVIDES RELIABILITY
- ③ OPTIONAL SAFETY DOUBLE TRIGGER

- ④ ONE-HAND MANUAL REAR LATCH
- ⑤ ROBUST METAL MAGAZINE
- RAPID CYCLING ENGINE



**ALM SERIES**  
Auto Fire, Long Magazine



**AUTO SERIES**  
Auto Fire, Short Magazine



#### FASTENER SPECIFICATION

Loading Capacity	200~375
Staple Length	5~16mm (3/16"~5/8")

Expect US1013FA(LM) & US1013JA(LM): 5~13mm(3/16"~1/2")



#### TOOL SPECIFICATION

Weight	Short Mag: 0.9 kg (2.0 lbs) Long Mag: 1.2 kg (2.6 lbs)
Height	140mm (5.5")
Width	38mm (1.5")
Length	Short Mag: 216mm (8.5") Long Mag: 380mm (15")
Operating Pressure	5~6.9 bar (70~100 psi)
Driving Power in-lbs @100 psi	51
Air Consumption L/cycle @90 psi	0.3 (0.64 cfm)
Applications	Furniture Upholstery, Automotive Vinyl, Trim

Model Number	A	B	Capacity	Wire Gauge
USSJK16A / USSJK16ALM	4.1mm (5/32")	0.74 x 0.60mm (0.030" x 0.024")	300	22 GA. Atro SJK
US9716A / US9716ALM	4.5mm (3/16")	0.95 x 0.65mm (0.037" x 0.026")	200	21 GA. BeA 97 / Senco W
US5416A / US5416ALM	4.7mm (3/16")	1.25 x 0.50mm (0.049" x 0.020")	200	20 GA. Duo-Fast 54 / Senco E
USSNCW16A / USSNCW16ALM	4.8mm (3/16")	0.90 x 0.69mm (0.035" x 0.027")	200	21 GA. Senco W
USSNCA16A / USSNCA16ALM	4.85mm (3/16")	0.74 x 0.60mm (0.030" x 0.024")	300	22 GA. Senco A / Prebena U
US416JA / US416JALM	5.25mm (7/32")	1.16 x 0.56mm (0.045" x 0.022")	200	20 GA. Duo-Fast 63
US9916A / US9916ALM	5.4mm (7/32")	0.98 x 0.59mm (0.040" x 0.021")	200	21 GA. Atro 99 / Prebena ED
US7116A / US7116ALM	9.1mm (3/8")	0.75 x 0.60mm (0.030" x 0.024")	180	22 GA. 71 Series / Senco C
USSNCG16A / USSNCG16ALM	9.5mm (3/8")	1.30 x 0.60mm (0.051" x 0.024")	200	20 GA. Senco G
USA1116A / USA1116ALM	10.8mm (7/16")	1.22 x 0.50mm (0.048" x 0.020")	200	20 GA. Fasco A11 / Arrow T50
US1013FA / US1013FALM	11.2mm (7/16")	0.70 x 0.50mm (0.028" x 0.020")	300	23 GA. MAX 10F (1000F)
US1013JA / US1013JALM	11.2mm (7/16")	1.20 x 0.60mm (0.047" x 0.024")	200	20 GA. MAX 10J (1000J)
US8416A / US8416ALM	12.3mm (1/2")	1.00 x 0.55mm (0.039" x 0.022")	200	21 GA. Bostitch SBNK / Fasco 84
US6416A / US6416ALM	12.45mm (1/2")	0.73 x 0.51mm (0.030" x 0.024")	300	22 GA. Atro 6 / BeA 64
US50(95)16A / US50(95)16ALM	12.55mm (1/2")	1.25mm x 0.50 (0.050" x 0.020")	200	20 GA. Duo-Fast 50 / BeA 95
US8016A / US8016ALM	12.8mm (1/2")	0.90mm x 0.63 (0.036" x 0.025")	270	21 GA. 80 Series / Senco AT
USSNCF16A / USSNCF16ALM	12.8mm (1/2")	1.25mm x 0.50 (0.049" x 0.020")	200	20 GA. Senco F / Prebena P



CARTON STAPLER

FEATURE TABLE



**DEPTH ADJUSTMENT**  
SETS FASTENERS  
AT DESIRED DEPTH



**ALUMINUM FRAME**



**RAPID FIRE TRIGGER**



**REAR EXHAUST**  
DIRECTS EXHAUST  
AWAY FROM USER / WORK PIECE



**AUXILIARY HANDLE**





- 1 CURVED ANVILS AVAILABLE FOR VARIOUS APPLICATIONS

2 STANDARD EQUIPPED AIR-FLOW REGULATOR

3 POWERFUL SHUTTLE BLADE PROVIDES PRE-COMPRESSION

4 6"X1" HIGH THROAT PROVIDES FLEXIBILITY
- 5 RAPID CYCLING ENGINE

6 SPECIAL-TREATED CLINCH PLATE


7 ROBUST GRAVITY CASTED FRAME



CR/ CL/ DR/ DL/ B  
Type Anvils Available



FASTENER SPECIFICATION	
Loading Capacity	110~250



TOOL SPECIFICATION	
Weight	2.2 kgs (4.8 lbs)
Height	260mm (11.2")
Width	55mm (2.2")
Length	370mm (14.6")
Operating Pressure	2.5~3.9 bar (36~55 psi)
Air Consumption L/cycle @90 psi	0.4 (0.85 cfm)
Applications	Corrugated Containers, Pallet Boxes, container Inserts


Model Number	Staple Type	Loading Capacity	A	B	C
PS50-10B	Bostitch SB103020	100	10~16mm (3/8"~5/8")	12.95mm (1/2")	2.60 x 0.50mm (0.103" x 0.020")
PS50-5B	Bostitch SB5019	220	10~16mm (3/8"~5/8")	12.85mm (1/2")	1.27 x 0.55mm (0.050" x 0.022")
PS50-777	KIHLBERG JK777	140	10~16mm (3/8"~5/8")	12.3mm (1/2")	2.25 x 0.65mm (0.090" x 0.026")
PS50-779	KIHLBERG JK779	250	10~16mm (3/8"~5/8")	12.3mm (1/2")	2.60 x 0.50mm (0.103" x 0.020")
PS50-80	80 Series	250	10~16mm (3/8"~5/8")	12.8mm (1/2")	1.25 x 0.50mm (0.049" x 0.020")





# SN32-590W

Walking Stick Stapler

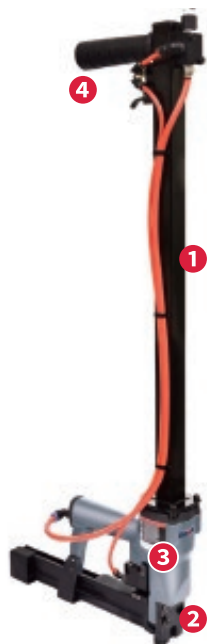


- 1 EXTENDED WALKING STICK FOR HARD-TO-REACH SPOTS
- 2 DRIVING DEPTH ADJUSTABLE TO PENETRATE PALLET WITHOUT DAMAGING CARTON
- 3 ALL METAL CONSTRUCTION
- 4 EXTENDED WALKING STICK ALSO AVAILABLE

FOR SN40 / SN50 STAPLERS (SEE PAGE 53~64)



FASTENER SPECIFICATION	
Type	KIHLBERG 590 / Omer 590
Loading Capacity	100
A	16~32mm (5/8"~1-1/4")
B	24mm (15/16")
C	1.9x0.9mm (0.075"x0.035")



TOOL SPECIFICATION	
Weight	4.11 kgs (9.0 lbs)
Height	841mm (33.1")
Width	60mm (2.37")
Length	352mm (13.8")
Operating Pressure	5~6.9 bar (70~100 psi)
Air Consumption	0.69 (1.46 cfm)
L/cycle @90 psi	
Applications	Carton to Wood Stapling on Hard-to Reach Spots

# PS32-590


Carton Plier Stapler



- 1 2.6" CLINCH THROAT DEPTH
- 2 FIXED ANVIL ALLOWS RAPID SIDEWAY MOVEMENT
- 3 ANVIL HEIGHT ADJUSTABLE WITH SPACER PLATES FOR DIFFERENT CORRUGATE THICKNESSES
- 4 ALL METAL CONSTRUCTION
- 5 HARDENED ANVIL MAXIMIZES TOOL LIFE



FASTENER SPECIFICATION	
Type	KIHLBERG 590 / Omer 590
Loading Capacity	100
A	16~32mm (5/8"~1-1/4")
B	24mm (15/16")
C	1.9x0.9mm (0.075"x0.035")



TOOL SPECIFICATION	
Weight	2.5 kgs (5.5 lbs)
Height	224mm (8.8")
Width	67mm (2.6")
Length	340mm (13.4")
Operating Pressure	5~6.9 bar (70~100 psi)
Air Consumption	0.69 (1.46 cfm)
L/cycle @90 psi	
Applications	Edge Protection Sealing End Caps Container Inserts Double or Tri-wall Corrugate

- 1


DEPTH OF CLINCH AND PENETRATION ADJUSTABLE
- 2

LOW NOISE ENGINE
- 3

ALL METAL CONSTRUCTION
- 200+ CARTONS PER HOUR
- LIGHT WEIGHT AND WELL BALANCED
- IDEAL FOR HIGH VOLUME PRODUCTION



FASTENER SPECIFICATION



TOOL SPECIFICATION


Weight	2.06 kgs (4.5 lbs)
Height	220mm (8.7")
Width	115mm (4.5")
Length	340mm (13.4")
Operating Pressure	5~6.9 bar (70~100 psi)
Air Consumption L/cycle @90 psi	0.5 (1.05 cfm)
Applications	Carton Box Sealing

Model Number	Staple Type	Loading Capacity	A	B	C
CCA-19-35	34.7mm (1-3/8") Crown Carton Staples	100	15 & 18mm (5/8" & 3/4")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
CCA-22-35	34.7mm (1-3/8") Crown Carton Staples	100	18 & 22mm (3/4" & 7/8")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
CCA-19-32	32mm (1-1/4") Crown Carton Staples	100	15 & 18mm (5/8" & 3/4")	32mm (1-1/4")	1.9 x 0.9mm (0.075" x 0.035")
CCA19-7437	Bostitch SW7437 Type Carton Staples	100	15 & 18mm (5/8" & 3/4")	34.5mm (1-11/32")	1.9 x 0.9mm (0.075" x 0.035")
CCA-19-9040	Bostitch SW9040 Type Carton Staples	100	15 & 18mm (5/8" & 3/4")	34.5mm (1-11/32")	2.3 x 0.9mm (0.090" x 0.035")
CCA-22-9040	Bostitch SW9040 Type Carton Staples	100	18 & 22mm (3/4" & 7/8")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")

- 1 DEPTH OF CLINCH AND PENETRATION ADJUSTABLE
  - 2 ALL METAL CONSTRUCTION
  - LIGHT WEIGHT AND WELL BALANCED
- AUXILIARY HANDLE AVAILABLE AS OPTION
  - FULL MANUAL, NO AIR SOURCE REQUIRED



FASTENER SPECIFICATION

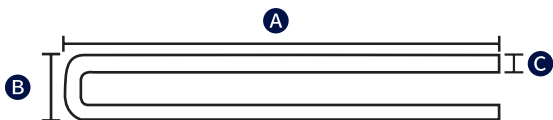

TOOL SPECIFICATION

Weight	1.9 kgs (4.2 lbs)
Height	295mm (11.6")
Width	115mm (4.5")
Length	390mm (15.4")
Applications	Carton Box Sealing

Model Number	Staple Type	Loading Capacity	A	B	C
MCS19-35	34.7mm (1-3/8") Crown Carton Staples	100	15 & 18mm (5/8" & 3/4")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
MCS22-35	34.7mm (1-3/8") Crown Carton Staples	100	18 & 22mm (3/4" & 7/8")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
MCS19-32	32mm (1-1/4") Crown Carton Staples	100	15 & 18mm (5/8" & 3/4")	32mm (1-1/4")	1.9 x 0.9mm (0.075" x 0.035")
MCS19-7437	Bostitch SW7437 Type Carton Staples	100	15 & 18mm (5/8" & 3/4")	34.5mm (1-11/32")	1.9 x 0.9mm (0.075" x 0.035")
MCS19-9040	Bostitch SW9040 Type Carton Staples	100	15 & 18mm (5/8" & 3/4")	34.5mm (1-11/32")	2.3 x 0.9mm (0.090" x 0.035")



- 1

DEPTH OF CLINCH AND PENETRATION ADJUSTABLE
- 2


ALL METAL CONSTRUCTION
- 3

TAKES 1000 STAPLES PER LOAD
- 4

LOW NOISE ENGINE
- LIGHT WEIGHT AND WELL BALANCED
- IDEAL FOR HIGH VOLUME PRODUCTION



FASTENER SPECIFICATION

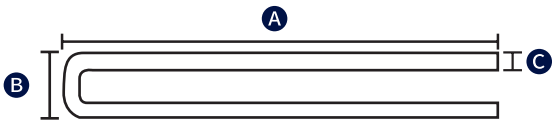

TOOL SPECIFICATION


Weight	2.4 kgs (5.2 lbs)
Height	230mm (9.1")
Width	115mm (4.5")
Length	233mm (9.2")
Operating Pressure	5~6.9 bar (70~100 psi)
Air Consumption L/cycle @90 psi	0.5 (1.05 cfm)
Applications	Carton Box Sealing

Model Number	Staple Type	Loading Capacity	A	B	C
RCC19-RR	Roll Stapler I-PR	1000	15 & 18mm (5/8" & 3/4")	32mm (1-1/4")	1.9 x 0.9mm (0.075" x 0.035")
RCC-19-GR	Roll Stapler I-GR	1000	15 & 18mm (5/8" & 3/4")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
RCC-22-GR	Roll Stapler I-PR	1000	18 & 22mm (3/4" & 7/8")	32mm (1-1/4")	2.3 x 0.9mm (0.090" x 0.035")
RCC-19-SWC	Roll Stapler SWC	1000	15 & 18mm (5/8" & 3/4")	34mm (1-3/8")	1.9 x 0.9mm (0.075" x 0.035")
RCC-19-555	Roll Stapler JK555	1000	15 & 18mm (5/8" & 3/4")	32mm (1-1/4")	2.3 x 1.4mm (0.090" x 0.055")

- ① DESIGNED FOR TRI-WALL CORRUGATED CARDBOARDS
- ② EASY-SQUEEZE ERGONOMIC TRIGGER
- ③ ALL METAL CONSTRUCTION
- ④ AUXILIARY HANDLE BOOST ERGONOMICS
- ⑤ LOW NOISE ENGINE



## FASTENER SPECIFICATION

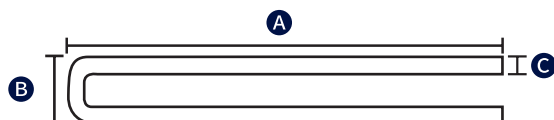

## TOOL SPECIFICATION

Weight	6.0 kgs (13.2 lbs)
Height	335mm (13.2")
Width	174mm (6.9")
Length	360mm (14.2")
Operating Pressure	5~6.9 bar (70~100 psi)
Air Consumption L/cycle @90 psi	6.8 (14.4 cfm)
Applications	Carton Box Sealing

Model Number	Staple Type	Loading Capacity	A	B	C
JCC-25	Bostitch SW9060 / ISM Giant Carton Staples	100	25&28mm (1"&1-1/8")	32mm (1-1/4")	2.3 x 1.4mm (0.090" x 0.055")
JCC-32	Bostitch SW9060 / ISM Giant Carton Staples	100	32&35mm (1-1/4"&1-3/8")	32mm (1-1/4")	2.3 x 1.4mm (0.090" x 0.055")
JCC-38	Bostitch SW9060 / ISM Giant Carton Staples	100	38mm (1-1/2")	32mm (1-1/4")	2.3 x 1.4mm (0.090" x 0.055")

- 1


DEPTH OF CLINCH AND PENETRATION ADJUSTABLE
- 2

EQUIPPED WITH A SAFETY FOOT PEDAL
- 3

LOW NOISE ENGINE
- IDEAL FOR HIGH VOLUME PRODUCTION
- 50 TO 100 CARTON BOTTOMS PER HOUR
- MANUAL AND PNEUMATIC VERSIONS AVAILABLE



FASTENER SPECIFICATION

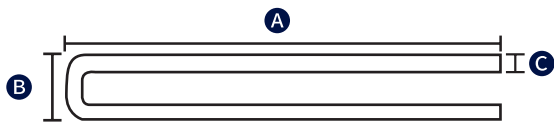

TOOL SPECIFICATION

Weight	MT Series: 26 kgs (57.3 lbs) AT Series: 29 kgs (63.9 lbs)
Height	1245mm (49")
Width	600mm (23.6")
Length	MT Series: 910mm (35.8") AT Series: 830mm (32.7")
Operating Pressure	5.5~6 bar (80~86 psi)
Air Consumption L/cycle @90 psi	2.0 (4.2 cfm)

Applications                      Carton Box Sealing

Model Number	Staple Type	Loading Capacity	A	B	C
MT-SB32-22	Mechanical Side Arm Stapler C	200	15, 18, 22mm (5/8", 3/4", 7/8")	32mm (1-1/4")	1.9 x 0.9mm (0.075" x 0.035")
MT-SB35-22	Mechanical Side Arm Stapler A	200	15, 18, 22mm (5/8", 3/4", 7/8")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
MT-PB32-22	Mechanical Bottom Post Stapler C	200	15, 18, 22mm (5/8", 3/4", 7/8")	32mm (1-1/4")	1.9 x 0.9mm (0.075" x 0.035")
MT-PB35-22	Mechanical Bottom Post Stapler A	200	15, 18, 22mm (5/8", 3/4", 7/8")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
AT-SB32-22	Pneumatic Side Arm Stapler C	200	15, 18, 22mm (5/8", 3/4", 7/8")	32mm (1-1/4")	1.9 x 0.9mm (0.075" x 0.035")
AT-SB35-22	Pneumatic Side Arm Stapler A	200	15, 18, 22mm (5/8", 3/4", 7/8")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")
AT-PB32-22	Pneumatic Bottom Post Stapler C	200	15, 18, 22mm (5/8", 3/4", 7/8")	32mm (1-1/4")	1.9 x 0.9mm (0.075" x 0.035")
AT-PB35-22	Pneumatic Bottom Post Stapler A	200	15, 18, 22mm (5/8", 3/4", 7/8")	34.7mm (1-3/8")	2.3 x 0.9mm (0.090" x 0.035")





# SPECIALTY TOOLS

# FEATURE TABLE



RAPID FIRE TRIGGER



ALUMINUM FRAME



AUXILIARY HANDLE



REAR EXHAUST

DIRECTS EXHAUST  
AWAY FROM USER / WORK PIECE





FS9240BC

40mm 18GA. 92 Series Cap Stapler

- 1 BYPASS "RAPID-LOADER" CAP MAGAZINE
  - 2 ALUMINUM EXTRUDED MAGAZINE WITH STEEL BACK COVER
  - 3 PINCH-FREE ERGONOMIC TRIGGER
  - 4 INDUSTRIAL TYPE TOOL FREE JAM CLEARANCE
  - 5 REAR EXHAUST DESIGN
  - 6 INDUSTRIAL T TOOL FREE JAM CLEARANCE
  - 7 METAL BELT HOOK
- IN-HOUSE CAP PRODUCTION
  - QUICKEST TOOL AVAILABLE  
fast cycle time sinks up to 6 staples/caps per second
  - COMPACT ERGONOMIC DESIGN  
30% more compact than bulky spool-type cap tools
  - TWO TRIGGER OPTIONS AVAILABLE:  
FS9240BC-ST (Sequential) / FS9240BC-CT (Contact)



SIMPLIFIED 3-STEP CAP LOADING

STEP 1: INSTALL CAPS




STEP 2: PULL PUSHER



STEP 3: REMOVE RING



FASTENER SPECIFICATION	
Type	18 GA. 92 Series Staples EVERWIN/BOSTITCH/DEWALT Caps
Loading Capacity	10
A	16~40mm (5/8"~1-9/16")
B	8.6mm (5/16")
C	1.25 x 1.00mm (0.049" x 0.039")



TOOL SPECIFICATION	
Weight	1.75kg (3.86lbs)
Height	255mm (10.04")
Width	167mm (6.57")
Length	259mm (10.2")
Operating Pressure	5~7 bar (70~100 psi)
Driving Power in-lbs @100 psi	188 In-lbs
Air Consumption L/cycle @90 psi	0.89 (1.89 cfm)

Applications	House Wrap, Roofing Felt, Timber Wrap, Foam Insulation, Corrugated Sheets to Pallets, Silt Fence
--------------	---

# PC Series


Stack Plastic Caps

- 1 BLISTER PACKAGING AVAILABLE
- 2 LOAD N' PULL EASY-LOADING COMPOSITE COLLATION STRIPS
- 3 EASY LOADING STRIPS MINIMIZE DOWNTIME
- 4 DIFFERENT PACKAGING VARIATIONS AVAILABLE
- 5 ELIMINATE PULL-THROUGH WHEN INSTALLING FELT, HOUSE WRAP AND FOAM BOARD INSULATION



## FASTENER SPECIFICATION

Type	EVERWIN : FS9240BC DeWALT : DWSL18CAP Bostitch : N66BC-1 / SB150SLBC
A	25mm (1")
B	2mm (0.09")
C	3mm (0.12")



## PACKAGING VARIATIONS

ITEM CODE	PACKAGING METHOD	PCS / UNIT	with STAPLES
PC-CS-10N	Clam Shell	1,000	NO
PC-CS-10Y	Clam Shell	1,000	YES
PC-B-25N	Carton	2,500	NO
PC-B-50Y	Carton	5,000	YES

# CFN-15S

25.4mm Crown Industrial Corrugated Nailer


- 1 DURABLE ALL METAL CONSTRUCTION
- 2 RELIABLE TOOL-FREE FASTENER LENGTH ADJUSTMENT
- 3 ULTRA-LIGHT MAGNESIUM ENGINE WITH RUBBER HANDLE GRIP
- 4 TWO TRIGGER OPTIONS AVAILABLE:  
CFN-15S-ST (Sequential) / CFN-15S-CT (Contact)



AI

## FASTENER SPECIFICATION

Type	Senco SC2
Loading Capacity	80
A	25.4mm (1")
B	9, 12, 15mm (3/8", 1/2", 5/8")
C	2.2mm (0.086")

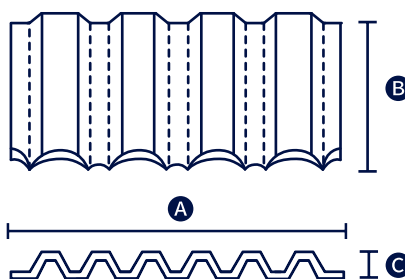

## TOOL SPECIFICATION

Weight	2.4kg (5.28lbs)
Height	270mm (10.6")
Width	92mm (3.6")
Length	320mm (12.6")
Operating Pressure	4.5~7.5 bar (65~110 psi)
Driving Power in-lbs @100 psi	420 In-lbs
Air Consumption L/cycle @90 psi	0.71 (1.50 cfm)

Applications  
Wood Joints Fastening, Window Frame, Corner & Butt Jointing, Furniture, Cabinet, Pallet & Crate, Truss & Roofing, RV's & Boat



# SN50W / 40W

Walking Stick Attachment for SN40 / SN50 Series Staplers

- 1 RUBBER HANDLE GRIP
- 2 STEEL WALKING STICK, CONCENTRIC TO STAPLE EXIT POINT
- 3 MAGNESIUM ERGONOMIC FRAME
- 4 MAGNESIUM CASTED ONE-PIECE CONNECTOR WITH INDUSTRY LEADING DURABILITY
- 5 DEPTH ADJUST DEVICE WITH FRONT PROTECTION PLATE
- EXTENDED WALKING STICK FOR HARD-TO-REACH SPOTS
- DRIVING DEPTH ADJUSTABLE TO PENETRATE WOOD WITHOUT DAMAGING CARTON



SN50W SERIES



SN40W SERIES



FASTENER SPECIFICATION	
TOOL MODEL	COMPATIBLE STAPLES
SN50S5W	Senco N/ Bostitch BCS5/ BeA155
SN50S4W	Bostitch BCS4/ Atro 16NC/ Prebena S
SN50GSIW	Paslode GSI 16/ Haubold KG700
SN50GS-16W	Paslode GS 16
SN40S2W	Bostitch BCS2/ Atro 18NC/ Prebena WC
SN40PW	Senco P/ JK 784/ Prebena WS
SN40GSWW	Paslode GSW 16/ Prebena WT
SN40GSW-14W	Paslode GSW 14
SN50GS-14W	Paslode GSW 16

TOOL SPECIFICATION	
Weight:	SN50: 5.6 kgs (12.3 lbs) SN40: 5.8 kgs (12.8 lbs)
Height:	SN50: 897mm (35.3") SN40: 888mm (35.0")
Width:	94mm (3.7")
Length:	367mm (14.4")
Operating pressure:	70 to 120 PSI (5-8 bars)
Use 5mm (0.2") air plug port and 10mm (3/8") air hose ID	
Air Consumption	SN50 : 0.9L/sec (1.9 cfm)
L/cycle @90 psi	SN40 : 0.8L/sec (1.7 cfm)
Firing mode:	Contact Automatic Fire
Applications:	Manufactured Housing, Framing Furniture Frames, Sheathing

- 1 FAIL-SAFE MECHANISM PREVENTS OBJECT FROM FALLING IN THE EVENT OF A FAILED SPRING
- 2 ALL METAL CONSTRUCTION
- 3 HEAT-TREATED HOOK
- MAXIMIZES TOOL LONGEVITY
- HOLDS TOOL AT DESIRED HEIGHT FOR GRAVITY-FREE OPERATION
- SPRING FORCE ADJUSTMENT DIAL OPTIMIZES OPERATION WITH DIFFERENT TOOL WEIGHT



MODEL NUMBER	WEIGHT CAPACITY	HANGER WEIGHT	CABLE LENGTH	CABLE DIA
CB3-5	3~5kg (6.6~11 lbs)	1.82kg (4 lbs)	130cm (52")	3.2mm (0.013")
CB5-7	5~7kg (11~15.5 lbs)	1.85kg (4.1 lbs)	130cm (52")	3.2mm (0.013")
CB5-9	5~9 kg (11~19.8 lbs)	3.59kg (7.9 lbs)	130cm (52")	4.0mm (0.16")
CB5-15	9~15 kg (19.8~33 lbs)	3.61 kg (8 lbs)	130cm (52")	4.0mm (0.16")

# HR7 Series

Hog Ring Plier



Model #	Nose Length
HR7	25mm (1")
HR7E	40mm (1.6")
HR77XE	70mm (2.8")

- 1 ALL METAL CONSTRUCTION
- 2 3 NOSE LENGTHS AVAILABLE
- 3 PNEUMATIC PISTON RETURN MINIMIZES CYCLE TIME
- 4 ADJUSTABLE FOR LEFT OR RIGHT HANDED OPERATION



FASTENER SPECIFICATION	
Type	15 GA. Bostitch RING15 Meihotech GDH
Wire Diameter	1.8mm (0.07")
Crown Width	23.9mm (15/16")
Ring Height	12mm (1/2")
Open Ring Size	19mm (3/4")
Closure Ring Size	7.9~10.7mm (5/16"~27/64")
Tip Finish	Sharp or Blunt
Load Capacity	100 Rings

TOOL SPECIFICATION	
Weight	HR7: 1.39 kgs (3.0 lbs) HR7E: 1.53 kgs (3.4 lbs) HR77EX: 1.72 kgs (3.8 lbs)
Height	189mm (7.4")
Width	89mm (3.5")
Length	HR7: 335mm (13.2") HR7E: 354mm (13.9") HR77XE: 381mm (15")
Operating Pressure:	5.9~7.9 bars (85 to 115 PSI)
Applications	Bag Closure, Bedding Automotive Seating Wire Cages, Fencing

# HR760 / 761

Hog Ring Plier



- 1 ALL METAL CONSTRUCTION
- 2 PNEUMATIC PISTON RETURN MINIMIZES CYCLE TIME
- 3 2 CLOSURE RING SIZES AVAILABLE
- 4 ADJUSTABLE FOR LEFT OR RIGHT HANDED OPERATION



FASTENER SPECIFICATION	
Type	16 GA. Meihotech 47ALD Bostitch RING516G100
Wire Diameter	1.6mm (0.063")
Crown Width	16.8mm (21/32")
Ring Height	9mm (3/8")
Open Ring Size	12.5mm (1/2")
Closure Ring Size	HR760: 3.2~5.6mm (1/8"~7/32") HR761: 4.8~5.6mm (3/16"~7/32")
Tip Finish	Sharp or Blunt
Load Capacity	100 Rings

TOOL SPECIFICATION	
Weight	1.39 kgs (3.0 lbs)
Height	189mm (7.4")
Width	89mm (3.5")
Length	335mm (13.2")
Operating Pressure:	5.9~7.9 bars (85 to 115 PSI)
Applications	Bag Closure, Bedding Automotive Seating Wire Cages, Fencing



- 1 ALL METAL CONSTRUCTION
- 2 PNEUMATIC PISTON RETURN MINIMIZES CYCLE TIME
- 3 2 CLOSURE RING SIZES AVAILABLE
- 4 ADJUSTABLE FOR LEFT OR RIGHT HANDED OPERATION



FASTENER SPECIFICATION

Type	16GA. Bostitch RING16G110
Wire Diameter	1.6mm (0.063")
Crown Width	23.5mm (29/32")
Ring Height	12mm (1/2")
Open Ring Size	19mm (3/4")
Closure Ring Size	4.8~8.7mm (3/16"~11/32")
Tip Finish	Sharp or Blunt
Load Capacity	140 Rings

TOOL SPECIFICATION

Weight	1.29 kgs (2.9 lbs)
Height	189mm (7.4")
Width	89mm (3.5")
Length	335mm (13.2")
Operating Pressure:	5.9~7.9 bars (85 to 115 PSI)
Applications	Bag Closure, Bedding Automotive Seating Wire Cages, Fencing



DR-SR15

D-Ring Plier



- 1 360 DEGREE ROTATABLE MAGAZINE
- 2 SIMPLE REAR LOADING MAGAZINE
- 3 ALL METAL CONSTRUCTION
- 4 PNEUMATIC PISTON RETURN MINIMIZES CYCLE TIME




FASTENER SPECIFICATION	
Type	15 GA. Encore Hartco RD1001 Stanley SR15 D-Rings
Height	12mm (15/32")
Crown Width	22mm (7/8")
Wire Diameter	1.8mm (0.070")
Open Ring Size	19mm (3/4")
Closure Ring Size	6.3mm (Min 1/4")
Load Capacity	50 Rings

TOOL SPECIFICATION	
Weight	1.48kg (3.3lbs.)
Height	255mm (10.0")
Width	55mm (2.16")
Length	245mm (9.6")
Operating Pressure:	5-7 bars (70 to 100 PSI)
Applications	Bag Closure, Bedding Automotive Seating Wire Cages, Fencing

DR-SR15-LM

Long Magazine D-Ring Plier

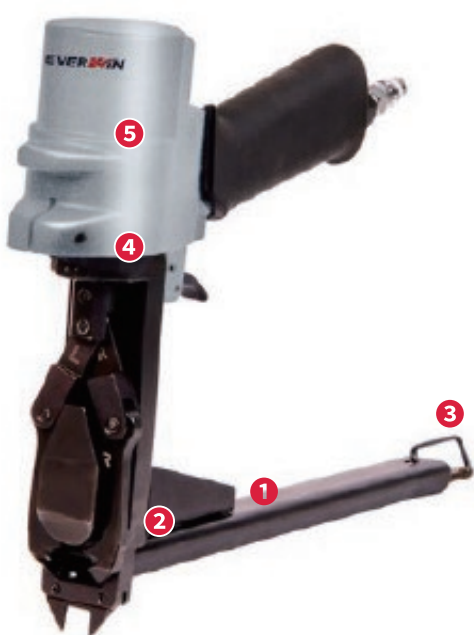

- 1 EXTENDED MAGAZINE MINIMIZES LOADING DOWNTIME
- 2 360 DEGREE ROTATABLE MAGAZINE
- 3 SIMPLE REAR LOADING MAGAZINE
- 4 ALL METAL CONSTRUCTION
- 5 PNEUMATIC PISTON RETURN MINIMIZES CYCLE TIME



FASTENER SPECIFICATION	
Type	15 GA. Encore Hartco RD1001 Stanley SR15 D-Rings
Height	12mm (15/32")
Crown Width	22mm (7/8")
Wire Diameter	1.8mm (0.070")
Open Ring Size	19mm (3/4")
Closure Ring Size	6.3mm (Min 1/4")
Load Capacity	100 Rings

TOOL SPECIFICATION	
Weight	1.57kg (3.5lbs.)
Height	255mm (10.0")
Width	55mm (2.16")
Length	363mm (14.3")
Operating Pressure:	5-7 bars (70 to 100 PSI)
Applications	Bag Closure, Bedding Automotive Seating Wire Cages, Fencing

NEW IN  
2022



- 1 DURABLE STEEL CAP AND EXHAUST COVER
- 2 ROBUST GRAVITY CASTED ENGINE
- 3 AUTO RETRACTABLE SAFETY SPRING LOADED PROTECTIVE NOSE
- 4 PATENTED AUTO RETRACTABLE SAFETY
- 5 DENAILS 4 TIMES FASTER THAN BY HAND
- 6 DRIVES NAILS FROM THE POINT FOR REMOVAL IN LUMBER, FLOORING, AND CONCRETE FORMING

AI

DEDICATED NOSE / DRIVER DIAMETER SET  
FOR PALLET LUMBER RECYCLING  
other driver and nose diameters available upon request

V6 Driver / Nose Set

Nose Diameter	6.48mm (1/4")
Driver Diameter	6.0mm (15/64")

TOOL SPECIFICATION

Weight	1.6kg (3.5lbs)
Height	198mm (7.8")
Width	87mm (3.5")
Length	217mm (8.5")
Operating Pressure	5~8 bar (70~120 psi)
Applications	Pallet Repair, Nail Removal



- 1 ALUMINUM HOUSING
- 2 METAL BELT CLIP
- 3 FOUR-POSITION SPEED ADJUSTMENT
- 4 ONE-HANDED REVERSE SWITCH
- 5 SOLID GRIP
- 6 360° ADJUSTABLE REAR EXHAUST
- PIN-LESS IMPACT MECHANISM
- SMOOTH RECOIL MECHANISM



DRIVE SPECIFICATION

Bolt Capacity	M5~M12
Free Speed	10,000rpm
Max Torque	95 Nm (840 In-lbs)
Working Torque	14~88 Nm (120~780 In-lbs)
Energy	0.4HP
Air Inlet	1/4" PT-19 or NPT-18
Avg. Air Consumption	708 (25cfm)

TOOL SPECIFICATION

Weight	1.0kg (2.2lbs)
Height	164mm (6.5")
Width	58mm (2.3")
Length	153mm (6.0")
Operating Pressure:	6.2 bars (90 PSI)
Applications	wood screws, wall boards assembly line work.



EWS-202

1/4" Impact Screwdriver

EWS-89-7500

1/4" Drive Screwdriver



- 1 CLUTCH MECHANISM
- 2 OPTIONAL PLANETARY GEAR SYSTEM WITH NEEDLE BEARING
- AUXILIARY SIDE HANDLE BOOSTS CONTROL AND STABILITY FOR LEFT-AND RIGHT-HANDED USERS



- 1 DIRECT DRIVE ENGINE
- 2 OPTIONAL PLANETARY GEAR SYSTEM WITH NEEDLE BEARING
- AUXILIARY SIDE HANDLE BOOSTS CONTROL AND STABILITY FOR LEFT-AND RIGHT-HANDED USERS



DRIVE SPECIFICATION	
Free Speed	12,000 rpm
Max Torque	102 Nm (900 In-lbs)
Working Torque	34~54 Nm (300~480 In-lbs)
Energy	0.5 HP
Air Inlet	1/4" PT-19 or NPT-18
Avg. Air Consumption	4 CFM (113 L/min)

TOOL SPECIFICATION	
Weight	1.0kg (2.2lbs.)
Height	156mm (6.1")
Width	43mm (1.7")
Length	181mm (7.1")
Operating Pressure:	6.2 bars (90 PSI)
Applications	wood screws, wall boards assembly line work.



DRIVE SPECIFICATION	
Free Speed	800 rpm
Torque	15 Nm (130 In-lbs)
Energy	0.5 HP
Air Inlet	1/4" PT-19 or NPT-18
Avg. Air Consumption	4 CFM (113 L/min)

TOOL SPECIFICATION	
Weight	1.1kg (2.4lbs.)
Height	156mm (6.1")
Width	43mm (1.7")
Length	200mm (7.9")
Operating Pressure:	6.2 bars (90 PSI)
Applications	wood screws, wall boards assembly line work.


NEW IN  
2023



- 1 ALL-STEEL CONSTRUCTION MAXIMIZES DURABILITY
- 2 DURABLE, ERGONOMIC CHROME-PLATED HANDLE
- 3 CONVENIENT HANDLE LOCK FOR SAFE STORAGE
- 4 REAR LOADING MAGAZINE FOR EASY LOADING
- 5 TIME-SAVING QUICK JAM CLEAR MECHANISM

AI

FASTENER SPECIFICATION	
Compatible Staple Types	Stanley / Bostitch STCR5019
	84
A	6.0~14mm (1/4~9/16")
B	11.6mm (7/16")
C	1.25x0.5mm (0.049" x 0.020")




TOOL SPECIFICATION	
Weight	0.85kg (1.9lbs)
Height	165mm (6.5")
Width	30mm (1.2")
Length	190mm (7.5")
Applications	Poly Sheeting, Carpeting, Insulation, House Warp, Roofing



- 1 ANTI-RUST NICKEL-PLATED FINISH
- 2 DURABLE ALL-STEEL CONSTRUCTION
- 3 ERGONOMIC SOFT-TOUCH HANDLE GRIP
- 4 ERGONOMIC FLAT ROUNDED PIN
- 5 REAR LOADING MAGAZINE
- QUICK JAM-CLEARANCE

AI

FASTENER SPECIFICATION	
Compatible Staple Types	HTC-T50-10: Arrow T50 / Rapid 140 / Stanley G (TRA700) / Novus G
	HTC-5019-10: Stanley / Bostitch STCR5019
	168
A	6.0~10mm (1/4~3/8")
B	HTC-T50-10: 10.6mm (3/8")
	HTC-5019-10: 11.6mm (7/16")
C	1.25x0.5mm (0.049" x 0.020")

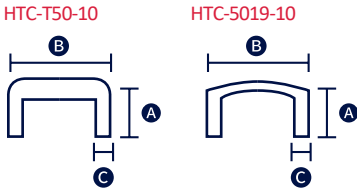

TOOL SPECIFICATION	
Weight	0.9kg (2.0lbs)
Height	58mm (2.3")
Width	35mm (1.4")
Length	305mm (12.0")
Applications	Poly Sheeting, Carpeting, Insulation, House Warp, Roofing



[www.everwinpneumatic.com](http://www.everwinpneumatic.com)

Email: [Sales@everwinpneumatic.com](mailto:Sales@everwinpneumatic.com)

| December 2022 |