


F1B A11-16

- Designed with a long narrow nose for excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Rear exhaust with muffler for noise reduction, diverts air away from the operator and prevents the lubricant from soiling work surface
- Bottom loading magazine speeds the reloading and keeps out the dirt
- Magazine without any welded parts makes maintenance easier

TOOL TYPE

cod. 11387 - 21387



1B A11-16

TOOL CHARACTERISTICS


Height	Width	Length	Weight
157 mm	42 mm	218 mm	780 g
6.18 inch	1.65 inch	8.58 inch	1.71 lbs

Pressure 4 - 7 bar | 60 / 100 psi

Air consumption per shot 0.37 l
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant Aerospace Lubricants Tribolube 12

FASTENER DATA

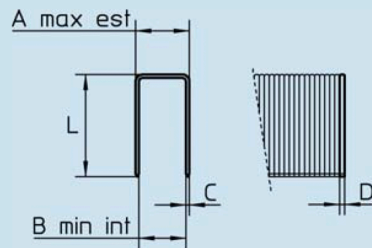

A) Outside Crown	10.80 mm	0.425 inch
B) Inside Crown	9.50 mm	0.374 inch
CxD) Wire	0.53 x 1.25 mm	0.021 x 0.049 inch
L) Length	6 - 16 mm	1/4 - 5/8 inch
Magazine Capacity	110 staples	
Staple Type	Rapid A11, Arrow T50, Prebena PF, Senco H, Spotnails A11	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 89.02 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 79.70 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by
UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System* 1
(Safety : Manual)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- garden furniture
- baseboards
- manufactured houses
- carpets and underlay
- upholstery
- boat interiors
- picture frames
- vehicle panels
- case backs
- trade shows
- remodelling
- labelling
- kitchen units
- shoe making
- dust covers
- umbrellas
- frame assembly
- toys and dolls
- sofas
- brushes
- mouldings and decorative trims
- saunas
- insulation

Distributor:

Nailfast

Units 4-5 Nobel Court, Nobel Road
Wester Gourdie Industrial Estate
Dundee, Tayside, DD2 4UH
t : 01382 622 993 e : sales@nailfast.co.uk

