

iPanrex

PNEUMATIC FASTENING TOOLS

**Pay Attention to Nothing
but Real EXellence.**

PANREX INDUSTRIAL CO., LTD.

No.45, Tucheng Rd., Dali Dist.,
Taichung City, Taiwan, 41274.

TEL: 886-4-2493-1538

FAX: 886-4-2493-1539

<http://www.panrex.com.tw>

E-mail:
panrex-wiichen@panrex.com.tw
panrex@hibox.hinet.net



2020.02



iPanrex

PNEUMATIC FASTENING TOOLS

www.panrex.com.tw



ISO-9001

ENTER AS CUSTOMER LEAVE AS FRIEND

Panrex is dedicated to advanced technology through extensive research development

Establishing complete fastening system to mark our tools safe, convenient and easy-to-operate is also our target. Through international certificate, panrex has also developed our special Techniques such as the following:



ONE YEAR WARRANTY WILL APPLY TO PANREX TOOL, EXCEPT NORMAL WEARING PARTS.




NAIL-DRIVING WITH SAFETY DEVICE:

Slim nose easy to aim
(U.S.PATENT 6450387)



POWERFUL & EASY CAP RELEASE:

(U.S.PATENT 6651863)

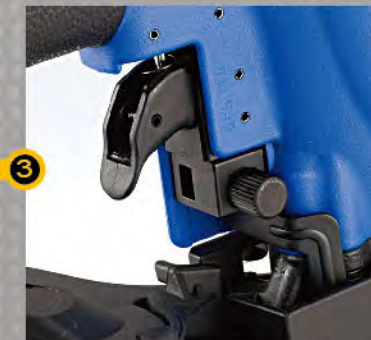

ADJUSTABLE WORK CONTACTING ELEMENT

Depth of drive adjustment by wheel. (U.S.PATENT 6866177)




ONE STEP JAM CLEARANCE:

(PATENT pending)



ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:

No adjustment needed to switch from one to the other.
(U.S. PATENT 6419140, 6357647)
(G.M.PATENT Nr20217706.8)

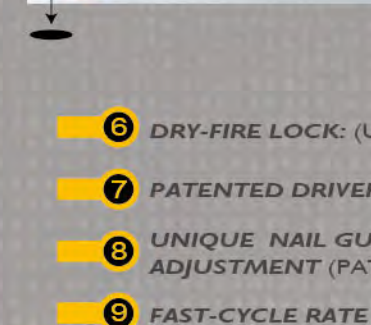

6 DRY-FIRE LOCK: (U.S. PATENT 7004368)

7 PATENTED DRIVER DESIGN FOR DURABLE USE

8 UNIQUE NAIL GUIDE LOCK AND EASY NAIL LENGTH ADJUSTMENT (PATENT 220112)

9 FAST-CYCLE RATE TO 15 NAILS/SECOND (110Psi)

Index

p01-06

INDUSTRIAL PALLET COIL NAILER

p07-12

CONSTRUCTION FASTENING SYSTEM

p13-20

FRAMING FASTENING SYSTEM

p21-26

INDUSTRIAL STAPLERS

p27-30

BRADDERS / PIN NAILERS

p31-32

FLOORING FASTENING SYSTEM

p33-36

CONCRETE FASTENING SYSTEM

p37-40

DRYWALL / SCREW FASTENING SYSTEM

p41-42

C - RING TOOL / HON - RING GUN


p43

SPECIAL FASTENING SYSTEM

p44


ACCESSORIES

INDUSTRIAL LEVEL PALLET COIL NAILER




PR-9130P PALLET COIL NAILER

TYPE OF NAIL	Wire Welded Nails
SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.256" - .338" (6.5-8.6mm)
COLLATION ANGLE	15° Wire Welded (Pitch: 10.5mm)
WEIGHT	12.67lbs (5.76kg)
LOAD CAPACITY	120-300 Nails
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm²)



PR-9100EP.1 (EPAL) PALLET COIL NAILER

TYPE OF NAIL	Wire Welded Nails
SHANK	.150" (3.8mm)
HEAD DIA.	.338" (8.6mm)
COLLATION ANGLE	15° Wire Welded (Pitch: 10.5mm)
WEIGHT	11.88lbs (5.40kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm²)




PR-8100C PALLET COIL NAILER

TYPE OF NAIL	Wire Welded Nails
SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.256" - .295" (6.5-7.5mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	11.88lbs (5.40kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm²)




INDUSTRIAL LEVEL PALLET COIL NAILER




PCN-790HP
PALLET COIL NAILER

SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.303" (MAX 7.7mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	8.03lbs (3.65kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-790P
PALLET COIL NAILER

SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.236" - .295" (6.0-7.5mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	7.63lbs (3.47kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)




PCN-670SA.1
PALLET COIL NAILER

SHANK	.092" - .131" (2.3-3.3mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	6.78lbs (3.08kg)
LOAD CAPACITY	225-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-70
PALLET COIL NAILER

SHANK	.092" - .118" (2.3-3.0mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	7.46lbs (3.39kg)
LOAD CAPACITY	225-300 Nails
LENGTH	45-70mm (1 3/4"-2 3/4") Wire Welded
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-70A2
FOR PALLET MACHINE

2 SET NOSE DESIGN WITH METAL INSERT FOR REPLACE AS THE HEAD OF NOSE WEARS	
SHANK	.092" - .118" (2.3-3.0mm)
HEAD DIA.	.220" - .275" (5.6-7.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	7.46lbs (3.39kg)
LOAD CAPACITY	225-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




INDUSTRIAL LEVEL PALLET COIL NAILER



Remote Valve

Remote Valve




PCN-70PAL

PCN-790PAL


PCN-70PAL/PCN-790PAL/PCN-55M.1PAL FOR PALLET MACHINE

MODEL	PCN-70PAL	PCN-790PAL
SHANK	.092" - .118" (2.3-3.0mm)	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.275" (MAX 7.0mm)	.303" (MAX 7.7mm)
COLLATION ANGLE	15° Wire Welded	15° Wire Welded
WEIGHT	6.82lbs (3.10kg)	8.03lbs (3.65kg)
LOAD CAPACITY	225-300 Nails	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)	70-120psi (4.9-8.3kg/cm ²)




PCN-65H.1 PALLET COIL NAILER

SHANK	.092" - .113" (2.3-2.87mm)
HEAD DIA.	.283" (MAX 7.2mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.79lbs (2.63kg)
LOAD CAPACITY	225-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-65.1 PALLET COIL NAILER

SHANK	.083" - .099" (2.1-2.5mm)
HEAD DIA.	.252" (MAX 6.4mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.79lbs (2.63kg)
LOAD CAPACITY	300-350 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-55 PALLET COIL NAILER

SHANK	.083" - .099" (2.1-2.5mm)
HEAD DIA.	.189" - .236" (4.8-6.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.50lbs (2.50kg)
LOAD CAPACITY	300-350 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-55M.1 PALLET COIL NAILER

SHANK	.083" - .099" (2.1-2.5mm)
HEAD DIA.	.189" - .236" (4.8-6.0mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.28lbs (2.40kg)
LOAD CAPACITY	300-350 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)





ADJUSTABLE AIR DEFLECTOR

BUILT-IN SOUND REDUCER
Low noise and vibration

ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment by wheel.
(U.S. PATENT 6866177)

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size.

POWERFUL
Driving power: 600 inch-lbs

FAST-CYCLE RATE TO 15 NAILS/SECOND (110Psi)

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other.
(U.S. PATENT 6419140)

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.

PCN-686S
WIRE WELDED: 28-34mm (1 1/2"-2 1/2")
PLASTIC SHEET: 32-50mm (1 3/4"-2 1/2")
WARNING
TO PREVENT SERIOUS INJURY FROM EXHAUST AND FLYING DEBRIS:
• READ OPERATION MANUAL BEFORE USING TOOL
• BEFORE USING TOOL, OPERATOR AND OTHERS IN WORK AREA SHOULD ALWAYS WEAR SAFETY GLASSES
• DISCONNECT AIR LINE OR BATTERY PACK WHEN REPLACING OR SERVICING OR TOOL WITH FINGER
• DO NOT USE TOOL ON COMBUSTIBLE GASES (OXYGEN, ACETYLENE, ETC.)
• DO NOT USE THE TOOL WHICH IS DEFECTIVE OR PERFORMS ABNORMALLY.
Max 8bar/120psi



EASY DIAL NAIL SIZE ADJUSTMENT
(R.O.C. PATENT 220112)



EXCLUSIVE NOZZLE TIP TO FIT SIDING DECKING OPERATION

CONSTRUCTION FASTENING SYSTEM

APPLICATION


SIDING / FENCING / EXTERIOR TRIM / SHEATHING
SUBFLOORS / ROOF DECKING / EXTERIOR DECK
FURRING / STRAPPING



PCN-790H PRO-COIL NAILER


SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.303" (MAX 7.7mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03lbs (3.65kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)

POWERFUL

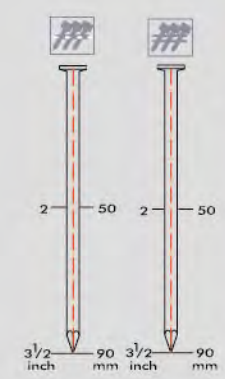

PCN-790S PRO-COIL NAILER

SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.236" - .295" (6.0-7.5mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	7.60lbs (3.48kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)

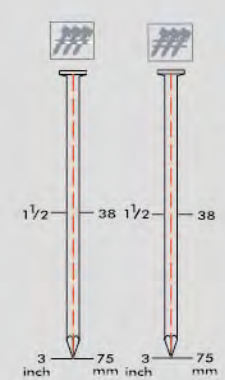

PCN-675S PRO-COIL NAILER


SHANK	.092" - .131" (2.3-3.3mm)
HEAD DIA.	.275" (MAX 7.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	6.82lbs (3.10kg)
LOAD CAPACITY	225-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)




CONSTRUCTION FASTENING System



PCN-670SA
PRO-COIL NAILER




SHANK	.092" - .131" (2.3-3.3mm)
HEAD DIA.	.275" (MAX 7.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	6.78lbs (3.08kg)
LOAD CAPACITY	225-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)

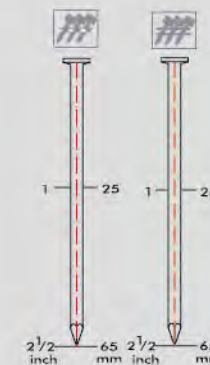


PCN-565H
PRO-COIL NAILER

SHANK	.092" - .113" (2.3-2.87mm)
HEAD DIA.	.275" (MAX 7.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.50lbs (2.50kg)
LOAD CAPACITY	250-400 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)

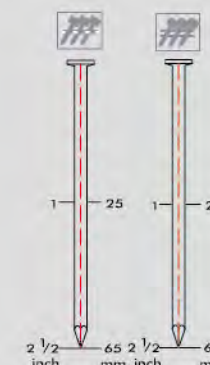

PCN-565S
PRO-COIL NAILER

SHANK	.092" - .113" (2.3-2.87mm)
HEAD DIA.	.197" - .236" (5.0-6.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.50lbs (2.50kg)
LOAD CAPACITY	250-400 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)




PCN-557S
PRO-COIL NAILER

SHANK	.083" - .092" (2.1-2.3mm)
HEAD DIA.	.189" - .220" (4.8-5.6mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.28lbs (2.40kg)
LOAD CAPACITY	250-400 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)




CONSTRUCTION FASTENING System

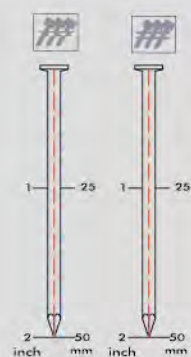

PCN-452S
CONICAL COIL NAILER

SHANK	.063" - .099" (1.59-2.5mm)
HEAD DIA.	.181" - .197" (4.6-5.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	4.18lbs (1.90kg)
LOAD CAPACITY	400 Nails
OPERATING PRESSURE	70 - 120 psi (4.9-8.3kg/cm ²)


New



PCN-557C
CONICAL COIL NAILER


SHANK	.083" - .092" (2.1-2.3mm)
HEAD DIA.	.189" - .220" (4.8-5.6mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.28lbs (2.40kg)
LOAD CAPACITY	250-400 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

**Heavy
Duty**



PR-945P
PRO-ROOFING COIL NAILER

SHANK	.120" (3.05mm)
HEAD DIA.	.413" (10.5mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	5.54lbs (2.52kg)
LOAD CAPACITY	120 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PCN-32
PRO-COIL NAILER

SHANK	.079" - .086" (2.0-2.2mm)
HEAD DIA.	.169" - .189" (4.3-4.8mm)
COLLATION ANGLE	0° Wire Welded
WEIGHT	2.77lbs (1.26kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)





ADJUSTABLE WORK CONTACTING ELEMENT
Depth of drive adjustment element on the tool.

LIGHTEST WEIGHT DESIGN

POWERFUL AND EASY CAP RELEASE
(U.S. PATENT 6651863)

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.

SAFETY LOCK-OUT MECHANISM
Tool will not fire unless more than three nails are in the magazine.

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)

ERGONOMIC DESIGN

Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size.


FRAMING FASTENING SYSTEM *TOP Loading*

APPLICATION

FRAMING / WALL SHEATHING /
ROOF SHEATHING / FLOOR DECKING /
BLOCKING SUBASSEMBLIES




PUSHER & FOLLWER PROTECTOR DESIGN



TOP LOADING 21 Degree PR-22021 PRO-FRAMING NAILER


TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	18°- 21°
WEIGHT	17.60lbs (8.0kg)
OPERATING PRESSURE	95 - 145psi (6.7-10.2kg/cm ²)
SHANK	.150" - .197" (3.8-5.0mm)
LENGTH	5 3/4"-8 5/8" (145-220mm)
LOAD CAPACITY	50 Nails
MAGAZINE LOADING	TOP

New



TOP LOADING 21 Degree PR-16021 PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	14.96lbs (6.80kg)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.150" - .197" (3.8-5.0mm)
LENGTH	4"-6 1/4" (100-160mm)
LOAD CAPACITY	55-60 Nails
MAGAZINE LOADING	TOP



TOP LOADING 21 Degree PR-13021 PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	13.42lbs (6.10kg)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .161" (2.87-4.1mm)
LENGTH	3 1/2"-5 1/8" (90-130mm)
LOAD CAPACITY	55 Nails
MAGAZINE LOADING	TOP



FRAMING FASTENING System

TOP Loading 21 Degree PR-9021P

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	7.96lbs (3.62kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .161" (2.87-4.1mm)
LENGTH	2"-3 1/2" (50-90mm)
LOAD CAPACITY	66 Nails




Tool free depth adjustment

TOP LOADING 21 Degree

PR-0021P

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	8.03lbs (3.65kg)
TOOL HEIGHT	14.3" (363mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .161" (2.87-4.1mm)
LENGTH	2 3/8"-4" (60-100mm)
LOAD CAPACITY	66 Nails




TOP Loading 34 Degree

PR-0034P

PRO-FRAMING NAILER

TYPE OF NAIL	Clipped Head Paper Collated
MAGAZINE ANGLE	31°
WEIGHT	7.74lbs (3.52kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .150" (2.87-3.8mm)
LENGTH	2"-4" (50-100mm)
LOAD CAPACITY	90 Nails




TOP Loading 17 Degree

PR-9017P

PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	17°
WEIGHT	7.96lbs (3.62kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .133" (2.87-3.4mm)
LENGTH	2"-3 1/2" (50-90mm)
LOAD CAPACITY	55 Nails





POWERFUL AND LIGHTEST
Driving power : 1100 inch-lbs

ERGONOMIC DESIGN
Center of gravity is closer to the trigger, providing better balance, also offers the lowest recoil for a tool of its size

REAR LOADING AND PUSHER PROTECTOR DESIGN.

ANTI-DOUBLE FIRE MECHANISM, SINGLE OR CONTACT FIRING:
No adjustment needed to switch from one to the other. (U.S. PATENT 6419140)

FAST & EASY LOADING
By pass pusher for fast, easy one-step loading.

ADJUSTABLE WORK CONTACTING ELEMENT

SAFETY LOCK-OUT MECHANISM
Tool will not fire unless more than three nails are in the magazine

DURABLE AND RELIABLE:
Rugged design will stand up to the demands of the job in any kind of weather.


PF-0021P

FRAMING FASTENING SYSTEM

REAR LOADING


APPLICATION

FRAMING / WALL SHEATHING
ROOF SHEATHING / FLOOR DECKING
/ BLOCKING SUBASSEMBLIES




REAR LOADING 21 Degree
PF-0021
PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	7.90lbs (3.59kg)
TOOL HEIGHT	14.3" (363mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .161" (2.87-4.1mm)
LENGTH	2" - 4" (50-100mm)
LOAD CAPACITY	66 Nails



REAR LOADING 21 Degree
PF-9021
PRO-FRAMING NAILER

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	20°
WEIGHT	7.70lbs (3.50kg)
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .131" (2.87-3.3mm)
LENGTH	2" - 3 1/2" (50-90mm)
LOAD CAPACITY	66 Nails




REAR LOADING 34 Degree
PF-0034
PRO-FRAMING NAILER

TYPE OF NAIL	Clipped Head Paper Collated
MAGAZINE ANGLE	31°
WEIGHT	7.63lbs (3.47kg)
TOOL HEIGHT	14.3" (363mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)
SHANK	.113" - .150" (2.87-3.8mm)
LENGTH	2" - 4" (50-100mm)
LOAD CAPACITY	90 Nails



FRAMING FASTENING System

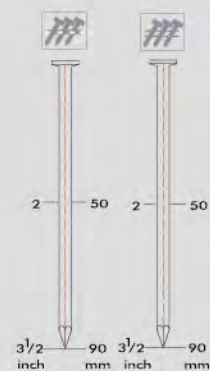


PCN-790S
Framing Coil Nailer

SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.236" - .295" (6.0-7.5mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	7.66lbs (3.48kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




EASY SIDE LOADING

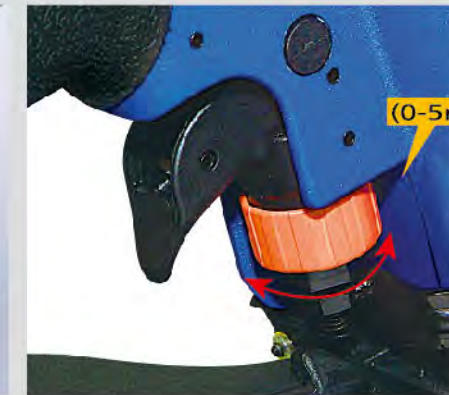

Tool Free Depth Adjustment



Safety TRIGGER LOCK LEVEL

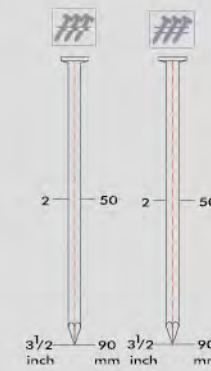

PCN-790H
Framing Coil Nailer

SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.303" (MAX 7.7mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03lbs (3.65kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

POWERFUL AND PATENTED
DRIVER DESIGN FOR DURABLE USE

LOW NOISE AND
LOW VIBRATION

ANTI-DOUBLE FIRE MECHANISM,
SINGLE OR CONTACT FIRING:
No adjustment needed to switch from
one to the other. (U.S. PATENT 6419140)

FAST-CYCLE RATE TO
15 NAILS/SECOND (110Psi)

ERGONOMIC DESIGN
Center of gravity is closer to the trigger,
providing better balance, also offers
the lowest recoil for a tool of its size

LIGHTEST WEIGHT DESIGN
ONLY 4.8lbs(2.18kg)

FOR FLOORING TIP



ONE STEP JAM CLEARANCE
(PATENT PENDING)



DURABLE AND RELIABLE:
Rugged design will stand up
to the demands of the job in
any kind of weather.

ADJUSTABLE WORK
CONTACTING ELEMENT
Depth of drive adjustment
element on the tool.

EASY LOADING AND
PUSHER PROTECTOR
DESIGN (PATENT PENDING)



SLIM SAFETY LEVER
FOR SELECT




INDUSTRIAL STAPLERS

APPLICATION

SHEATHING / SUBFLOORING / ROOF DECKING
FURNITURE FRAMES / PALLETS / VINYL SIDING
CRATE AND BOX ASSEMBLY

PS-2540WC WIDE CROWN STAPLER




GAUGE SIZE	16GA.
CROWN SIZE	1" (25.4mm)
WIDTH X THICKNESS	.055" x .062" (1.4x1.6mm)
WEIGHT	4.8lbs (2.1kg)
LIGHT	1/2"-1 9/16" (13x40mm)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



FOR FLOORING TIP

(TWO IN ONE) PR-15864Q PRO-MEDIUM CROWN STAPLER



GAUGE SIZE	16GA. (N TYPE STAPLES)	15GA. (Q TYPE STAPLES)
CROWN SIZE	13/32"-7/16" (10.6-11.2mm)	7/16" (11.2mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)	.075" x .067" (1.9x1.7mm)
WEIGHT	6.16lbs (2.80kg)	6.16lbs (2.80kg)
LOAD CAPACITY	147 Staples	130 Staples
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)	80-120psi (5.5-8.3kg/cm ²)

PS-16851C PRO-MEDIUM CROWN STAPLER



GAUGE SIZE	16GA. (N TYPE STAPLES)
CROWN SIZE	13/32"-7/16" (10.6-11.2mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)
WEIGHT	4.73lbs (2.15kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)



INDUSTRIAL STAPLERS

Medium Crown
&
Narrow Crown



PR-16851P

PRO-MEDIUM CROWN STAPLER

GAUGE SIZE	16GA. (N TYPE STAPLES)
CROWN SIZE	13/32"-7/16" (10.6-11.2mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)
WEIGHT	4.80lbs (2.18kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)



PS-16951C

PRO-MEDIUM CROWN STAPLER

GAUGE SIZE	16GA.
CROWN SIZE	15/32"-1/2" (12.2-12.7mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)
WEIGHT	4.73lbs (2.15kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)



PR-16951P

PRO-MEDIUM CROWN STAPLER


GAUGE SIZE	16GA.
CROWN SIZE	15/32"-1/2" (12.2-12.7mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)
WEIGHT	4.80lbs (2.18kg)
LOAD CAPACITY	147 Staples
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)



PR-1440B

INDUSTRIAL MEDIUM CROWN STAPLER


GAUGE SIZE	16&17GA.
CROWN SIZE	13/32" - 7/16" (10.5-11.2mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm) .057" x .051" (1.45x1.3mm)
WEIGHT	3.52lbs (1.60kg)
LOAD CAPACITY	75 Staples
OPERATING PRESSURE	80 - 120 psi (5.5-8.3kg/cm ²)



PR-9040P

LIGHT WEIGHT NARROW CROWN STAPLER

GAUGE SIZE	18GA.
CROWN SIZE	7/32" (5.8mm)
WIDTH X THICKNESS	.050" x .039" (1.25x1.0mm)
WEIGHT	2.86lbs (1.30kg)
LOAD CAPACITY	100 Staples
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-9040B

INDUSTRIAL NARROW CROWN STAPLER

GAUGE SIZE	18GA.
CROWN SIZE	5.8mm(7/32")
WIDTH X THICKNESS	1.25 x 1.0mm(.050" x .039")
WEIGHT	3.61lbs (1.64kg)
LOAD CAPACITY	100 Staples
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




INDUSTRIAL STAPLERS

Narrow Crown
&
Fine Wire

PR-9240B

INDUSTRIAL NARROW CROWN STAPLER




GAUGE SIZE	18GA.
CROWN SIZE	5/16"-11/32" (8.6-8.85mm)
WIDTH X THICKNESS	.050" x .041" (1.27x1.05mm)
WEIGHT	3.52lbs (1.60kg)
LOAD CAPACITY	100 Staples
OPERATING PRESSURE	70 - 120 psi (4.9-8.3kg/cm ²)

New




PR-9240P

LIGHT WEIGHT NARROW CROWN STAPLER




GAUGE SIZE	18GA.
CROWN SIZE	5/16"-11/32" (8.6-8.85mm)
WIDTH X THICKNESS	.050" x .039" (1.25x1.0mm)
WEIGHT	2.75lbs (1.25kg)
LOAD CAPACITY	100 Staples
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



8016A

FINE WIRE STAPLER WITH RAPID FIRE DESIGN


GAUGE SIZE	21GA.
CROWN SIZE	1/2" (12.9mm)
WIDTH X THICKNESS	.037" x .026" (0.95x0.65mm)
WEIGHT	1.98lbs (0.90kg)
LENGTH	3/16"-5/8" (5-16mm)
LOAD CAPACITY	100 Staples
OPERATING PRESSURE	70-100psi (4.9-7.0kg/cm ²)



8016ALM

FINE WIRE STAPLER WITH RAPID FIRE DESIGN


GAUGE SIZE	21GA.
CROWN SIZE	1/2" (12.9mm)
WIDTH X THICKNESS	.037" x .026" (0.95x0.65mm)
WEIGHT	2.64lbs (1.20kg)
LENGTH	3/16"-5/8" (5-16mm)
LOAD CAPACITY	270 Staples
OPERATING PRESSURE	70-100psi (4.9-7.0kg/cm ²)



7116A

FINE WIRE STAPLER WITH RAPID FIRE DESIGN

GAUGE SIZE	22GA.
CROWN SIZE	11/32" (9.1mm)
WIDTH X THICKNESS	.030" x .024" (0.75x0.6mm)
WEIGHT	1.98lbs (0.90kg)
LENGTH	3/16"-5/8" (5-16mm)
LOAD CAPACITY	150 Staples
OPERATING PRESSURE	70-100psi (4.9-7.0kg/cm ²)



7116ALM

FINE WIRE STAPLER WITH RAPID FIRE DESIGN

GAUGE SIZE	22GA.
CROWN SIZE	11/32" (9.1mm)
WIDTH X THICKNESS	.030" x .024" (0.75x0.6mm)
WEIGHT	2.64lbs (1.20kg)
LENGTH	3/16"-5/8" (5-16mm)
LOAD CAPACITY	400 Staples
OPERATING PRESSURE	70-100psi (4.9-7.0kg/cm ²)





BRADDER/ PIN NAILER SYSTEM

APPLICATION

DOOR AND WINDOW CASING / PANEL ASSEMBLY
FURNITURE FRAMES TRIM / INTERIOR AND EXTERIOR TRIM
BUTT JOINTS CABINETS

DEPTH-OF-DRIVE ADJUSTMENT
(U.S. PATENT 6866177)



NAIL-DRIVING WITH
SAFETY DEVICE:
Slim nose easy aim
(U.S. PATENT 6450387)



UNIQUE DRY-FIRE
LOCK DESIGN
(U.S. PATENT 7004368)

POWERFUL

PR-1664 PRO 16GA. FINISH NAILER

GAUGE SIZE	16GA.
LENGTH	3/4"-2 1/2" (19-65mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)
WEIGHT	3.52lbs (1.60kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



(UP TO 50MM FINISH NAILER) PR-1650 16GA. FINISH NAILER

GAUGE SIZE	16GA.
LENGTH	9/16"-2" (15-50mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)
WEIGHT	3.08lbs (1.40kg)
LOAD CAPACITY	50 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-1850F 18GA. FINISH NAILER

GAUGE SIZE	18GA.
LENGTH	9/16"-2" (15-50mm)
WIDTH X THICKNESS	.050" x .039" (1.25x1.0mm)
WEIGHT	3.08lbs (1.40kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-1845 18GA. FINISH NAILER

GAUGE SIZE	18GA.
LENGTH	9/16"-1 3/4" (15-45mm)
WIDTH X THICKNESS	.050" x .039" (1.25x1.0mm)
WEIGHT	2.53lbs (1.15kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




Bradder/ Pin Nailer System




PR-1565DA
34° 2-1/2" DA NAILER

GAUGE SIZE	15GA.
COLLATION ANGLE	34°
LENGTH	1"-2 1/2" (25-65mm)
SHANK	.070" (1.8mm)
WEIGHT	3.7lbs (1.7kg)
LOAD CAPACITY	106 Angled Brads
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-2145S
COMBINATION FINISH NAILER -
PROFESSIONAL TYPE

GAUGE SIZE	21GA. MIN TIP NAILER
LENGTH	9/16"-1 3/4" (15-45mm)
SHANK	.033" (0.84mm)
WEIGHT	2.53lbs (1.15kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-2345S
23GA. PIN NAILER

GAUGE SIZE	23GA.
LENGTH	5/8"-1 3/4" (15-45mm)
SHANK	.025" (0.64mm)
WEIGHT	2.53lbs (1.15kg)
LOAD CAPACITY	200 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PR-1550A
26° Angled Bradder

GAUGE SIZE	15GA.
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WIDTH X THICKNESS	.075" x .063" (1.9x1.6mm)
WEIGHT	3.08lbs (1.40kg)
LOAD CAPACITY	86 Angled Brads
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-1650A
26° Angled Bradder

GAUGE SIZE	16GA.
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WIDTH X THICKNESS	.063" x .055" (1.6x1.4mm)
WEIGHT	3.08lbs (1.40kg)
LOAD CAPACITY	100 Angled Brads
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PR-1850A
26° Angled Bradder

GAUGE SIZE	18GA.
COLLATION ANGLE	26°
LENGTH	3/4"-2" (20-50mm)
WIDTH X THICKNESS	.050" x .039" (1.25x1.0mm)
WEIGHT	3.08lbs (1.40kg)
LOAD CAPACITY	128 Angled Brads
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



FLOORING FASTENING SYSTEM

APPLICATION HARDWOOD FLOORING

COMFORTABLE GRIP DESIGN

AVAILABLE WITH LONG OR SHORT HANDLE

HIGH-SPEED, Mallet-Actuated PNEUMATIC OPERATION INCREASES

PRODUCTIVITY OVER MANUALLY-OPERATED TOOLS

ANGLED FITTING PREVENT HOSE FROM INTERFERING MAGAZINE OR OPERATOR.

SPECIAL MAGAZINE DESIGN. FOR EASY LOADING AND OPERATION

PRECISELY DRIVES STAPLES OR FLOORING CLEATS AT PROPER ANGLE AND DEPTH

STRONG, LIGHT WEIGHT, ONLY 8.8~9lbs

PATENTED INSIDE PARTS DESIGN FOR DURABLE AND SAFE OPERATION
(U.S. PATENT: 7213735)
(AU. 2007214318)

SPECIAL MAGAZINE DESIGN. FOR EASY LOADING AND OPERATION

EXTRA-WIDE COMPOSITE BASE PLATE FOR ADDED STABILITY.

Mallet and SERVICE PARTS BAG INCLUDED


ACCESSORY



PR-9040FL2

18-Gauge Engineered Flooring Stapler

GAUGE SIZE	18 GA.
CROWN SIZE	7/32" (5.8mm)
WIDTH x THICKNESS	0.50"x.039" (1.25x1.0mm)
LENGTH	1/2"-1 5/8" (12-40mm)
WEIGHT	4.03lbs (1.8kg)
LOAD CAPACITY	200 Staples
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




2 IN 1 (CLEAT & T NAIL)

LFN-50B

COMBINATION L & T CLEAT FLOORING NAILER


TYPE OF NAIL	L SHAPE & T SHAPE CLEAT NAILS
GAUGE SIZE	16 GA.
LENGTH	1 1/4"-2" (32-50mm)
WEIGHT	8.80lbs (4.00kg)
LOAD CAPACITY	110 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



LFN-50B18/LFN-50B18R (with Roller system)

18 GAUGE INDUSTRIAL FLOORING NAILER

TYPE OF NAIL	L SHAPE CLEAT NAILS
GAUGE SIZE	18 GA.
LENGTH	1 1/4"-2" (32-50mm)
WEIGHT	8.80lbs (4.00kg)
LOAD CAPACITY	100 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



FS-50/FS-50R (with Roller system)

15 1/2" GAUGE INDUSTRIAL FLOORING NAILER (STAPLE TYPE)


TYPE OF NAIL	FLOORING STAPLE
GAUGE SIZE	15 - 15 1/2 GA.
CROWN SIZE	1/2" (13.0mm)
LENGTH	1 1/4"-2" (32-50mm)
WEIGHT	9.02lbs (4.10kg)
LOAD CAPACITY	90 Staples
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)





CONCRETE FASTENING SYSTEM


(UP TO 50MM CONCRETE NAILER) PR-1.8 50C CONCRETE NAILER



GAUGE SIZE	15GA.
LENGTH	9/16"-2" (15-50mm)
SHANK	.070" (1.8mm)
HEAD DIA.	.118" x .070" (3.0 x 1.8mm)
WEIGHT	3.08lbs (1.40kg)
LOAD CAPACITY	50 Nails
MAGAZINE LOADING	Side
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PT-2575 CONCRETE T NAILER

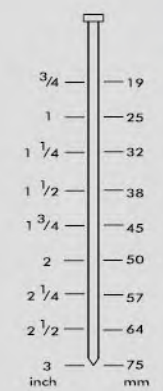

TYPE OF NAIL	T Nails
LENGTH	3/4"-3" (19-75mm)
SHANK	.086" - .098" (2.2-2.5mm)
HEAD DIA.	.275" (MAX 7.0mm)
WEIGHT	6.56lbs (2.98kg)
LOAD CAPACITY	80 Nails
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)

New


CONCRETE FASTENING System

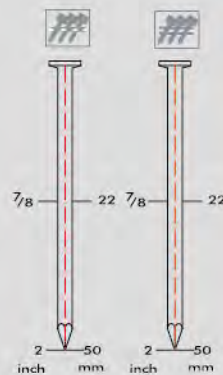

PCN-50ST.1 CONCRETE COIL NAILER

SHANK	.083" - .113" (2.1-2.87mm)
HEAD DIA.	.244" (MAX 6.2mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.28lbs (2.40kg)
LOAD CAPACITY	150-300 Concrete Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)


New



PT-3040 CONCRETE PIN NAILER


TYPE OF NAIL	Concrete Pins
LENGTH	9/16"-1 5/8" (15-40mm)
SHANK	.102" - .118" (2.6-3.0mm)
HEAD DIA.	.260" (MAX 6.6mm)
WEIGHT	6.42lbs (2.92 kg)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm ²)

New

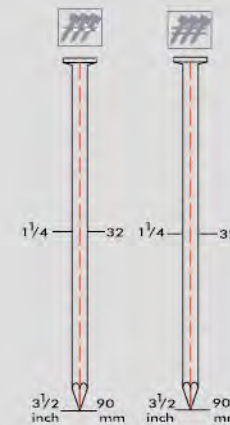


PCN-790H CONCRETE COIL NAILER

SHANK	.099" - .150" (2.5-3.8mm)
HEAD DIA.	.303" (MAX 7.7mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03lbs (3.65kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

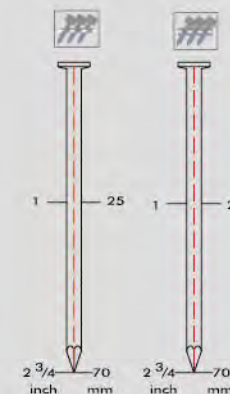

PCN-670ST CONCRETE COIL NAILER


SHANK	.099" - .131" (2.5-3.3mm)
HEAD DIA.	.299" (MAX 7.6mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	6.78lbs (3.08kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)

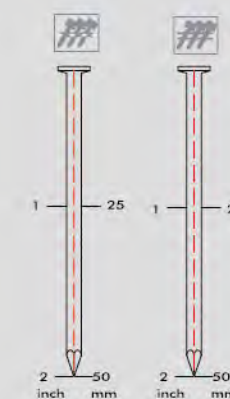

PCN-650ST CONCRETE COIL NAILER

SHANK	.099" - .131" (2.5-3.3mm)
HEAD DIA.	.236" - .283 (6.0-7.2mm)
COLLATION ANGLE	15° Wire Welded
WEIGHT	6.64lbs (3.02kg)
LOAD CAPACITY	150-300 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



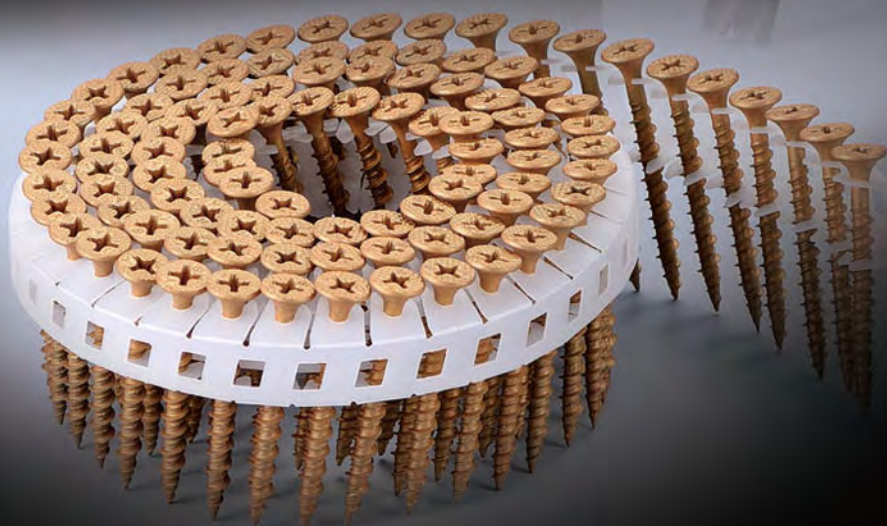


DRYWALL/ SCREW NAILER


Drywall/ Screw Nailer



PCN-450DW
Drywall/Screw Nailer




SHANK	.086" - .138" (2.2-3.5mm)
LENGTH	1"-2" (25-50mm) Plastic Sheet
HEAD DIA.	.323" (MAX 8.2mm)
COLLATION ANGLE	15° Sheet Collated
WEIGHT	4.25lbs (1.93kg)
LOAD CAPACITY	200 Nails/Coil Screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PRN-50DW
Standard Drywall Screw Nailer

SHANK	.118" - .161" (3.0-4.1mm)
LENGTH	1"-2" (25-50mm)
HEAD DIA.	.338" (MAX 8.6mm)
COLLATION ANGLE	15° Sheet Collated
WEIGHT	5.5lbs (2.50kg)
LOAD CAPACITY	150-250 Nails/Coil Screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)



PRN-50
Drywall/Screw Nailer

SHANK	.118" - .161" (3.0-4.1mm)
LENGTH	1"-2" (25-50mm) Wire Welded 1"-2" (25-50mm) Plastic Sheet
HEAD DIA.	.315" (MAX 8.0mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	5.68lbs (2.58kg)
LOAD CAPACITY	150-250 Nails/Coil Screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




PCN-890H
Drywall/Screw Nailer

SHANK	.118" - .161" (3.0-4.1mm)
LENGTH	2"-3 1/2" (50-90mm) Wire Welded 2"-3 1/2" (50-90mm) Plastic Sheet
HEAD DIA.	.338" (MAX 8.6mm)
COLLATION ANGLE	15° Wire Welded and Sheet Collated
WEIGHT	8.03lbs (3.65kg)
LOAD CAPACITY	150-250 Nails/Coil Screws
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm ²)




C-RING TOOL/ HOG-RING GUN

THE LIGHTEST C-RINGER IN THE MARKET.




PSC-7 C-RING GUN

GAUGE SIZE	15GA.
CROWN SIZE	15/16"x15/32" (24x12mm)
SHANK	1.75 - 1.8mm
CLOSURE SIZE	.311" - .421" (7.9-10.7mm)
WEIGHT	2.64lbs (1.20kg)
LOAD CAPACITY	130 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)




PSC-7C C-RING GUN

GAUGE SIZE	15GA.
CROWN SIZE	15/16"x15/32" (24x12mm)
SHANK	1.75 - 1.8mm
CLOSURE SIZE	.189" - .343" (4.8-8.7mm)
WEIGHT	2.64lbs (1.20kg)
LOAD CAPACITY	130 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)




PSC-7E(Long Nose) C-RING GUN

GAUGE SIZE	15GA.
CROWN SIZE	15/16"x15/32" (24x12mm)
SHANK	1.75 - 1.8mm
CLOSURE SIZE	.311" - .421" (7.9-10.7mm)
WEIGHT	2.64lbs (1.20kg)
LOAD CAPACITY	130 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)



PSC-660 C-RING GUN

GAUGE SIZE	16GA.
CROWN SIZE	21/32"-11/32" (16.8x9.0mm)
SHANK	1.6mm
CLOSURE SIZE	.099" - .138" (2.5-3.5mm)
WEIGHT	3.15lbs (1.43kg)
LOAD CAPACITY	130 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)




PCR-660 C-RING GUN

GAUGE SIZE	16GA.
CROWN SIZE	21/32"-11/32" (16.8x9.0mm)
SHANK	1.6mm
CLOSURE SIZE	.099" - .138" (2.5-3.5mm)
WEIGHT	3.74lbs (1.70kg)
LOAD CAPACITY	130 Nails
OPERATING PRESSURE	70-120psi (4.9-8.3kg/cm²)




SPECIAL FASTENING SYSTEM

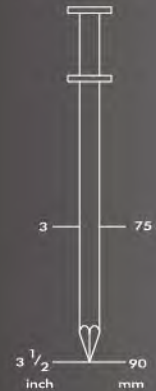

PF-9021D

DUPLEX NAILER


TYPE OF NAIL	Collated Duplex Nail
MAGAZINE ANGLE	20°
WEIGHT	7.70lbs (3.50kg)
SHANK	.113" - .131" (2.87-3.3mm)
LENGTH	2"-3 1/2" (50-90mm)
LOAD CAPACITY	66 Nails
TOOL HEIGHT	14" (356mm)
OPERATING PRESSURE	80-120psi (5.5-8.3kg/cm²)



FS-3150

FENCE STAPLER


TYPE OF NAIL	FENCE STAPLE
GAUGE SIZE	10 1/2 GA. (3.15mm)
WEIGHT	6.30lbs (2.86kg)
LOAD CAPACITY	52 Fence Staples
OPERATING PRESSURE	80 - 120psi (5.5-8.3kg/cm²)



PR-8034M

HEAVY DUTY METAL CONNECTOR

TYPE OF NAIL	Full Round Head Plastic Collated
MAGAZINE ANGLE	31°
WEIGHT	14.74lbs (6.70kg)
OPERATING PRESSURE	80 - 120psi (5.5-8.3kg/cm²)
SHANK	.252" - .264" (6.4-6.7mm)
LENGTH	3 1/8" (80mm)
LOAD CAPACITY	33 Nails
MAGAZINE ANGLE	REAR



PR-2380A

SPECIAL ANGLE NAILER

MAGAZINE ANGLE	34°
WEIGHT	6.16lbs (2.80kg)
OPERATING PRESSURE	70 - 120psi (4.9-8.3kg/cm²)
SHANK	.092" (2.3mm)
LENGTH	2" - 3 1/8" (50-80mm)
LOAD CAPACITY	100 Nails



ACCESSORIES

▼ Piston Driver



INTERCHANGEABLE WITH MAX
/ HITACHI / BOSTITCH

BRAND NAME	MODEL	PARTS #
MAX	CN55	MA31866
MAX	CN70	MA31657
MAX	CN80	MA34445
PASLODE	F350S	PA501042
PASLODE	F250S-PP	PA501468
PASLODE	5250-PP	PA401933
PASLODE	3150W16	PA404345
BOSTITCH	RN45B	BO101961
BOSTITCH	RN46	BO149826
BOSTITCH	N70	BO102630
BOSTITCH	N80	BO80157
BOSTITCH	N100	BO100157
BOSTITCH	N400	BO11204-1030001
BOSTITCH	64084	11204-0780009
BOSTITCH	64099	11204-1010001

BRAND NAME	MODEL	PARTS #
HITACHI	NV45AB2	HI-878156
HITACHI	NR65AK	HI-883471
HITACHI	NR83A2	HI-877323
HITACHI	NR90AD	HI-884957
HITACHI	NR90AE	HI-885519
HITACHI	NV75AG	HI-883980
HITACHI	NR83AA2	HI-883510
HITACHI	NR83A	HI-877323-R
HITACHI	NV83A	HI-878428
HITACHI	N5008AC	HI-883716
HITACHI	NV65AH	HI-882684



SECONDARY
SAFETY
For:PR-8100C2



REMOTE FIRE VALVE



TAPPING BLOCK
FOR FLOORING



TWO SET NOSE FOR PALLET
COIL NAILER (PCN-70)

▼ EXTENDED MAGAZINE



EXTENDED MAGAZINE
FOR AUTOMATIC PRE-NAIL
MACHINE (4 STRIPS)
For model: PF-0021, PF-0034, PF-9021