

45L/R - Face Fix 45° Hanger


PRODUCT DESCRIPTION

The 45L/R timber to timber connector offers a pre-skewed 45° left or right hand orientation.


MATERIAL

- 1.2mm galvanised mild steel - Z275

CE Marked - ETA - 09/0276

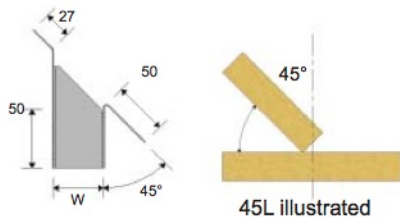

45L illustrated

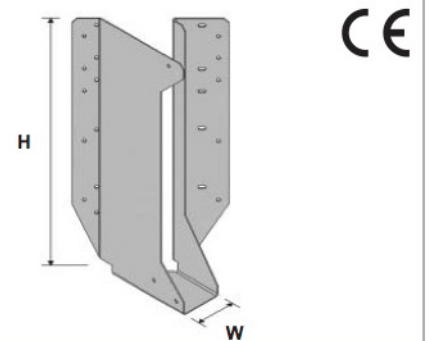

45L/R

45L/R Performance - I-Joist

Product Code		Dimensions			Fixings (3.75x30mm)		Safe Working Loads (kN) - Long Term					Characteristic Hanger Capacity (kN)				
Left Hand Orientation	Right Hand Orientation	W	H	B	Face	Joist	Uplift Short Term	Header Specification				Uplift	Header Specification			
								I-Joist (Solid Flange)	I-Joist (LVL Flange)	LVL	Glulam (Min GL28)		I-Joist (Solid Flange)	I-Joist (Solid Flange)	LVL	Glulam (Min GL28)
45L-46-170	45R-46-170	46	170	50	14	2	0.8	5.55	5.55	5.55	5.55	0.99	14.92	14.92	15.48	15.48
45L-46-220	45R-46-220	46	220	50	17	3	0.8	5.55	5.55	5.55	5.55	0.99	14.92	14.92	15.48	15.48
45L-46-300	45R-46-300	46	300	50	21	3	0.8	6.93	6.93	6.93	6.93	0.99	17.54	17.54	16.31	16.31

Hangers shown are for 45mm wide joists, available in widths of 39, 46, 52, 61, 65, 72, 75, 88, 92, 97 and 100mm.
For angles outwith 45°, please refer to VS page 60 or VRC page 64.